



## SEB 7080


### Safety threaded socket

Ø 4mm Safety

1000 V CAT III

24 A

- for fixture in panels up to 6 mm thick
- fixed by: slotted nut M12 x 0.75 and spring washer
- hole Ø 12.2+0.1 mm
- flat tab can be bent up to 90° once
- punched part
- fixture using special tools MWZ 8 and MWZ 15
- fastening nut (slotted nut) M12 x 0.75

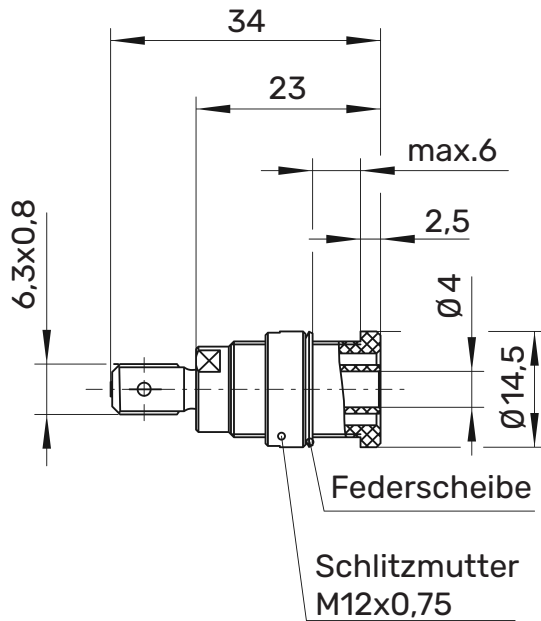

! WH 034



MA 007



### General information

Order No. <sup>1)</sup> **SEB 7080 Ni ... (colour)**

colours black, red, blue, yellow, green, grey, brown, white, orange, green-yellow

contact parts nickel-plated

insulation PA 6.6 (Polyamid) UL94 - V2

### Technical data

terminal FSH 6,3 mm x 0,8 mm

transition resistance 5 mΩ (Ni)

rated voltage <sup>2)</sup> 1000 V CAT III

rated current <sup>2)</sup> 24 A

operating temperature from -25 °C to +80 °C

max. torque 45 Ncm












fastening nut

SCHÜTZINGER

<sup>1)</sup> other contact platings, colours and terminals on request  
<sup>2)</sup> at normal ambient temperatures

**SEB 7080**

Ni

	<b>SW</b>	<b>Schwarz</b>	<b>Black</b>	99014167
	<b>RT</b>	<b>Rot</b>	<b>Red</b>	99015964
	<b>BL</b>	<b>Blau</b>	<b>Blue</b>	99015965
	<b>GE</b>	<b>Gelb</b>	<b>Yellow</b>	99015966
	<b>GN</b>	<b>Grün</b>	<b>Green</b>	99015967
	<b>GR</b>	<b>Grau</b>	<b>Grey</b>	99018040
	<b>BR</b>	<b>Braun</b>	<b>Brown</b>	99017746
	<b>WS</b>	<b>Weiß</b>	<b>White</b>	99016969
	<b>VI</b>	<b>Violett</b>	<b>Purple</b>	
	<b>OR</b>	<b>Orange</b>	<b>Orange</b>	99018039
	<b>GNGE</b>	<b>Grüngelb</b>	<b>green-yellow</b>	99015967