



ZPK 8066


Meter test terminal block

Ø 4 mm safety

600 V CAT II

1 A

- for quick test connection to electric meter
- spring clip for Ø 3 mm
- socket Ø 4 mm
- connection must be dead when installed. Safety regulations for life working must be heeded

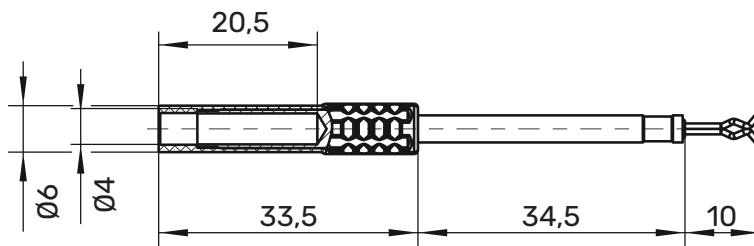

⚠ WH 011



General information

Order No. ¹⁾	ZPK 8066 Ni /...(colour)
colours	black, red, blue, yellow, green, grey, brown, white, purple
contact parts	nickel-plated
contact tip	steel (VA)
insulation	PA 6.6 (UL94-V2)

Technical data










terminal	strand
transition resistance	3 mΩ (Ni)
rated voltage ²⁾	600 V CAT II
rated current ²⁾	1 A
operating temperature	from -25 °C to +80 °C

¹⁾ other contact platings, colours and terminals on request

²⁾ at normal ambient temperatures

ZPK 8066

Ni

	SW	Schwarz	Black	99017107
	RT	Rot	Red	99018018
	BL	Blau	Blue	99018019
	GE	Gelb	Yellow	99018020
	GN	Grün	Green	99018021
	GR	Grau	Grey	99018022
	BR	Braun	Brown	99018023
	WS	Weiß	White	99018024
	VI	Violett	Purple	99018025