


# KO 89-58

## BNC adapter lead

BNC

- 1st side: BNC-connector with bend relief, assembled on RG cable
- 2nd side: 2x Ø 4 mm lamella-basket plugs with inline and additional socket crosswise, assembled on highly flexible, double-insulated PVC cable 1 mm<sup>2</sup>
- with Y splitter
- cable length = cutting length of the RG cable

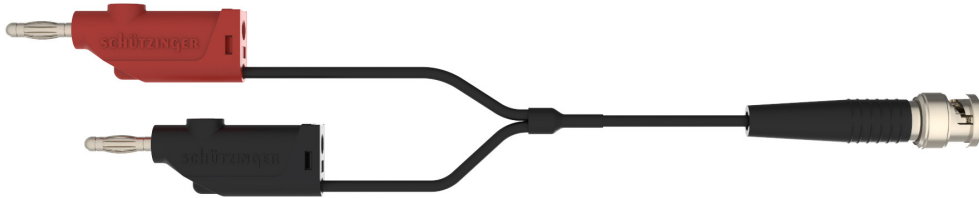

### General information

Order No. <sup>1)</sup>	<b>KO 89-58 / 100 / SW</b>
Order No. <sup>1)</sup>	<b>KO 89-58 / 200 / SW</b>

### Technical data

RG type acc. to MIL-C-17	RG 58 C / U
characteristic impedance	50±2 mΩ
1st side BNC connector	UG 1785 /U-Crimp
1st side bend relief	K 50 / SW
2nd side lamella-basket plug black, assembled on RG 58 C/U-core, cable length	15 cm
2nd side lamella-basket plug black, assembled on RG 58 C/U-shield, cable length	25 cm
cable length	100 cm / 200 cm

<sup>1)</sup> other colours and lengths on request

**KO 89-58 / 100**

---

● SW

99002147

**KO 89-58 / 200**

---

● SW

99002152