

SABNC 7013



Safety adapter BNC

BNC

600 V CAT III

3 A

- fully insulated
- for adaptation from Ø 4 mm safety system to BNC system
- Ø 4 mm safety sockets to safety BNC plug

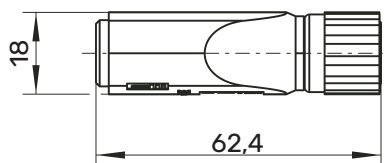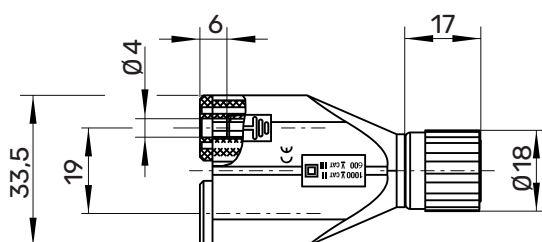

General information

Order No. ¹⁾ **SABNC 7013 / M / GR**

colours grey

contact parts nickel-plated

insulation PA 6 (Polyamid)

Technical data

terminal safety BNC plug

transition resistance 0,8 mΩ

rated voltage ²⁾ 600 V CAT III

rated current ²⁾ 3 A

operating temperature from -20 °C to +80 °C

²⁾ at normal ambient temperatures

SABNC 7013

● GR

99014018