


KAB 8214 Kelvin adapter box

Kelvin

30 V_{AC} / 60 V_{DC}

1 A

- this kelvin adapter box has been specially developed for four-wire measurement
- adaptation of our kelvin threaded socket KBU 7992 L Au / RT and KBU 7992 L Au / SW to each 2 safety sockets
- connection of wires via the kelvin quick-release terminals KSDK 7730 / RT and KSDK 7730 / SW
- adaptation to safety BNC connectors

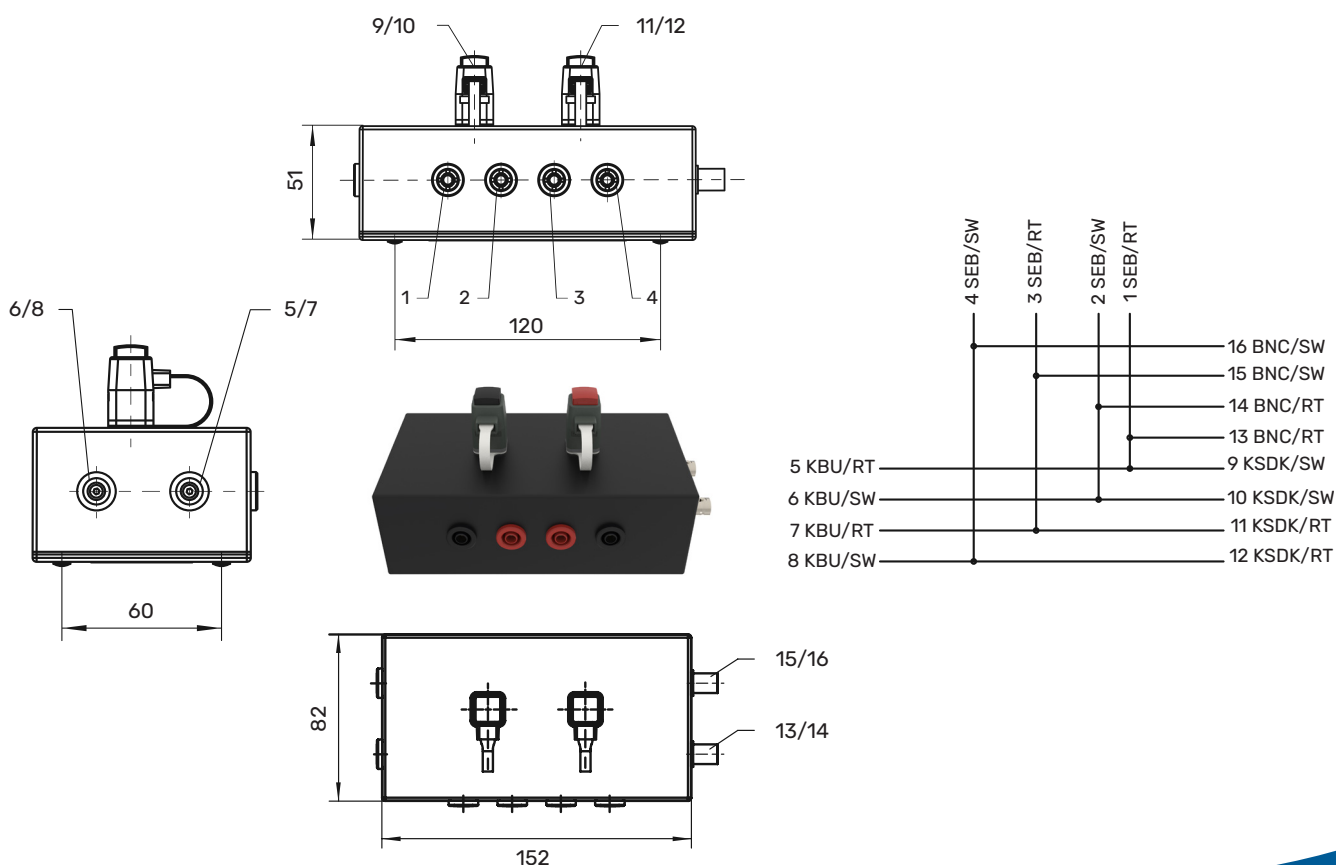

General information

Order No. ¹⁾	KAB 8214 / SW
contact parts	nickel-plated gold-plated
insulation	PA 6.6 (Polyamid)
housing	Flame Retardant ABS, UL 94 – V0

Technische Daten

terminal	plug
rated voltage ²⁾	30 V _{AC} / 60 V _{DC}
rated current ²⁾	1 A
operating temperature	from -25 °C to +80 °C

¹⁾ other contact platings, colours and terminals on request

²⁾ at normal ambient temperatures

KAB 8214

99017409