

KML 7528



Kelvin measuring lead with pincers

Kelvin

30 V_{AC} / 60 V_{DC}

1 A per lead

- 4 lamella-basket plugs, stackable, assembled on flexible PVC cable 0.22 mm² and 2 pincers
- this kelvin measuring lead has been especially developed for four-wire measurement
- pincer opening 15 mm max.

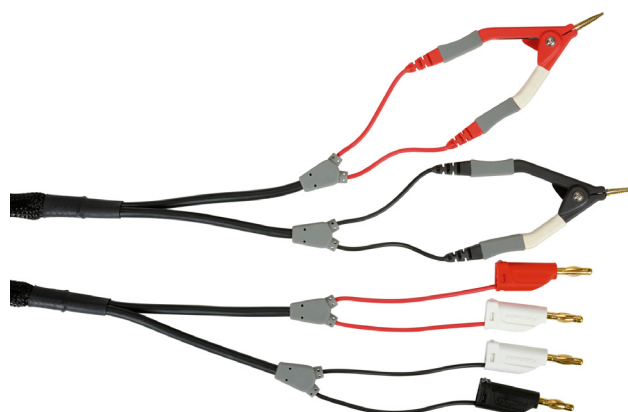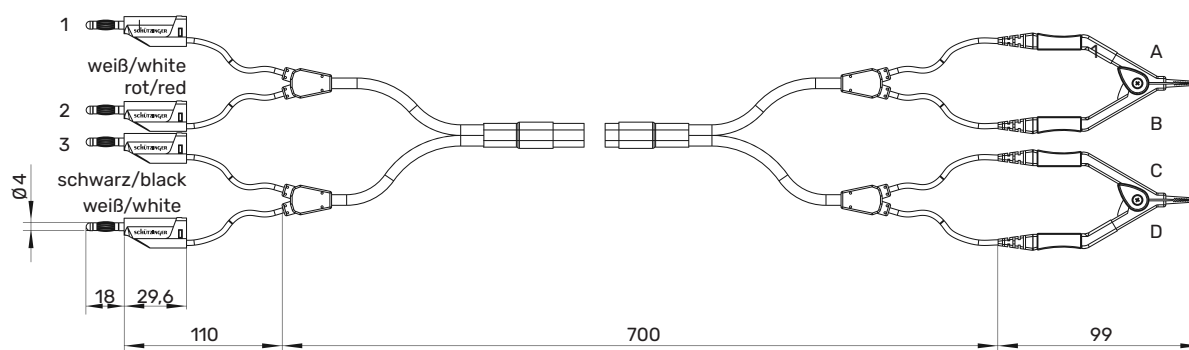

! WH 027



General information

Order No. ¹⁾	KML 7528 / 2ZA / 4x0.22 / 70
colours	black / red / white
contact parts	gold-plated
insulation	PA (Polyamid), PP (Polypropylen)
length	70 cm

Technical data

cable	0,22 mm ² PVC-isoliert
rated voltage ²⁾	30 V _{AC} / 60 V _{DC}
rated current	1 A per lead

¹⁾ other contact platings, colours and lengths on request

²⁾ at normal ambient temperatures

KML 7528

99015424