

## KML 7848


### Kelvin measuring lead

Kelvin

30 V<sub>AC</sub> / 60 V<sub>DC</sub>

1 A

- 1 coaxial safety lamella-basket plug, assembled on coaxial cable RG 174/U and tweezers
- this kelvin measuring lead has been especially developed for four-wire measurement
- tweezers opening 17 mm max.
- for our kelvin threaded socket KBU 7992 L Au / ..(colour)

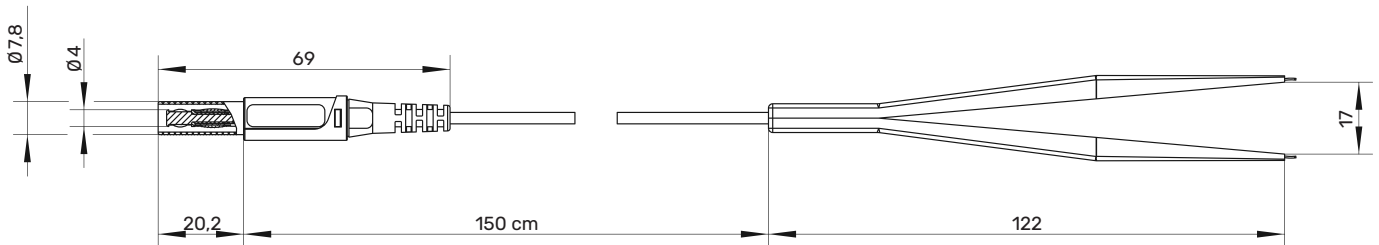

! WH 027



#### General information

Order No. <sup>1)</sup>	KML 7848 Au / PZ / 150 / ... (Farbe)
colours	black, red
contact parts	gold-plated
insulation	PA 6.6 (Polyamid)
lengths	150 cm

#### Technische Daten

cable	coaxial cable RG 174/U
rated voltage <sup>2)</sup>	30 V <sub>AC</sub> / 60 V <sub>DC</sub>
rated current <sup>2)</sup>	1 A
operating temperature	from -10 °C to +50 °C

<sup>1)</sup> other contact platings, colours and lengths on request  
<sup>2)</sup> at normal ambient temperatures

**KML 7848**

**Au**

---

● SW	Black	99016677
● RT	Red	99017097