

KML 7852


Kelvin measuring lead

Kelvin

30 V_{AC} / 60 V_{DC}

10 A

- 1 coaxial safety lamella-basket plug, assembled on coaxial cable and safety kelvin clip
- this kelvin measuring lead has been especially developed for four-wire measurement
- safety kelvin clip with grips up to Ø 30 mm
- for our kelvin threaded socket KBU 7992 L Au /..(colour)

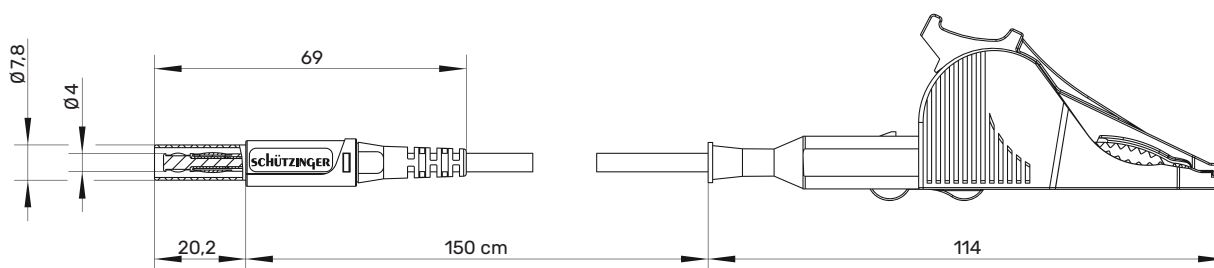

! WH 019



General information

Order No ¹⁾	KML 7852 Au / SAK / 150 / ... (Farbe)
colours	black, red
contact parts	gold-plated
insulation	PA 6.6 (Polyamid)
length	150 cm

Technical data

cable	coaxial cable 2 x 0.75 mm ²
rated voltage ²⁾	30 V _{AC} / 60 V _{DC}
rated current ²⁾	10 A
operating temperature	from -10 °C to +80 °C

¹⁾ other contact platings, colours and lengths on request
²⁾ at normal ambient temperatures

KML 7852

Au

● SW	Black	99016678
● RT	Red	99017044