

OBDBOB 8445

OBD breakout box for self-assembly



Automotive

30 V_{AC} / 60 V_{DC}

10 A

- diagnostic box for the OBD II interface of the vehicle
- 1 x OBD II socket OBDBU 7640 Au / 24V / SW and 1 x OBD II connector OBDST 7388 AURO / 24V / SW on the face
- 16 x connecting sockets BRBU 7924 L Ni / SW, marked with the OBD pin number in the grid dimension of 13 cm / 21 mm
- marking with the pin number of the OBD socket or OBD connector
- pin-wise contact of the OBD socket with the connecting socket and pin-wise contact of the connecting socket with the OBD connector




General information

Order No. ¹⁾	SET OBDBOB 8445
colours	black
contact parts	nickel-plated and gold-plated
housing	Aluminium
insulation	PA 6.6 (Polyamid)

Technical data

cable	plug
rated voltage ²⁾	30 V _{AC} / 60 V _{DC}
rated current ²⁾	10 A
operating temperature	from -25 °C to +80 °C

¹⁾ other contact platings, colours and terminals on request
²⁾ at normal ambient temperatures

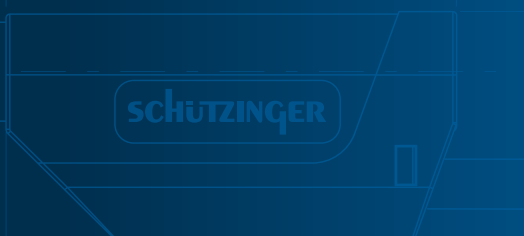

SET OBDBOB 8445

99018109