



## ESD 798


### Safety quick-release terminal

Ø 4mm safety



300 V CAT II

16 A

- fully insulated for metal panels

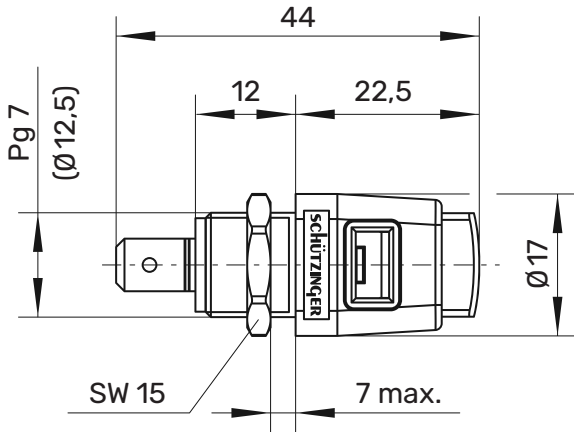

Montagebohrung/hole

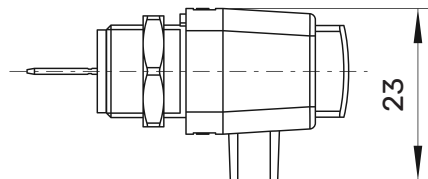

### General information

Order No. <sup>1)</sup>	ESD 798 / ..(colour)
colours	black, red, blue, yellow, green, grey, brown, white, orange, purple, green-yellow
contact parts	nickel-plated
insulation	PA6.6 (Polyamid)

### Technical data












terminal	FR 6.3 mm x 0.8 mm or solder
transition resistance	5 mΩ
rated voltage <sup>2)</sup>	300 V CAT II
rated current <sup>2)</sup>	16 A
operating temperature	from -25 °C to +90 °C
panel thickness	0.8 mm-7 mm
insertion window	8 mm x 4 mm
tab	6.3 mm x 0.8 mm
spring force	20 N

<sup>1)</sup> other colours, terminals and springs (approx. 15 N or 33 N) on request

<sup>2)</sup> at normal ambient temperatures

**ESD 798**

Ni

	<b>SW</b>	<b>Schwarz</b>	<b>Black</b>	99000664
	<b>RT</b>	<b>Rot</b>	<b>Red</b>	99000662
	<b>BL</b>	<b>Blau</b>	<b>Blue</b>	99000657
	<b>GE</b>	<b>Gelb</b>	<b>Yellow</b>	99000659
	<b>GN</b>	<b>Grün</b>	<b>Green</b>	99000661
	<b>GR</b>	<b>Grau</b>	<b>Grey</b>	99015201
	<b>BR</b>	<b>Braun</b>	<b>Brown</b>	99008592
	<b>WS</b>	<b>Weiß</b>	<b>White</b>	99008885
	<b>VI</b>	<b>Violett</b>	<b>Purple</b>	99016215
	<b>OR</b>	<b>Orange</b>	<b>Orange</b>	99016214
	<b>GNGE</b>	<b>Grüngelb</b>	<b>Green-yellow</b>	99007987