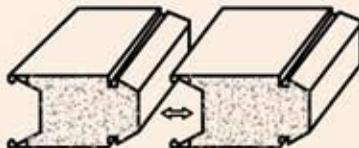
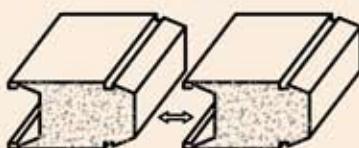
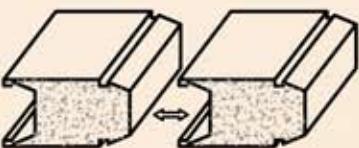
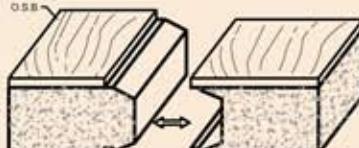




ELITE ALUMINUM CORPORATION

4650 Lyons Technology Parkway • Coconut Creek, FL 33073
954.949.3200 • fax 954.949.3201 www.elitealuminum.com • info@elitealuminum.com

ROOF PARTS CATALOG

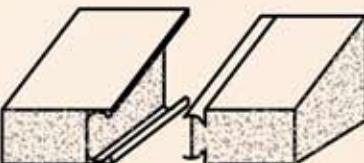
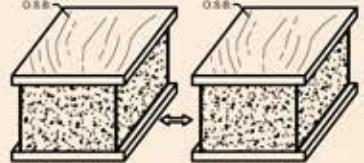
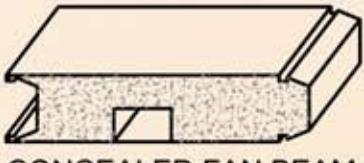
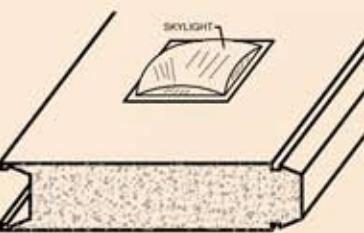

ITEM	USE / DESCRIPTION	SPEC'S		
 UNIVERSAL LOCK	Roll lock or horizontal lock. double sealant reservoir, reinforced locking edges and interlock foam for consistent thermal separation. Will easily unlock if necessary. Aluminum facings both sides with polystyrene foam core. Fully engineered and product approved.	4 Ft. width or 22-7/8", up to 40 Ft. lengths .024 or .032 Alum. facings (.032 white only) 1lb or 2lb density polystyrene foam 3", 4", 6" & 8" thickness available		
 ELITE INTERLOCK	Roll lock design with positive lock feature. Interlock foam for consistent thermal separation. Aluminum facings both sides with polystyrene foam core. Fully engineered and product approved.	4 Ft. width or 22-7/8", up to 40 Ft. lengths .024 or .032 Alum. facings (.032 white only) 1lb or 2lb density polystyrene foam 3", 4", 6" & 8" thickness available		
 ELITE PANELOCK	Horizontal lock design with positive lock feature. Interlock foam for consistent thermal separation. Aluminum facings both sides with polystyrene foam core. Fully engineered and product approved.	4 Ft. width or 22-7/8", up to 24 Ft. lengths .024 Alum. facings 1lb or 2lb density polystyrene foam 3", 4", 6" & 8" thickness available		
 ELITE SHINGLE	Specifically designed for the use of shingles or tile. OSB top facing with aluminum bottom facing allows for the application of conventional roof treatments. Must maintain a minimum slope of 2-1/2" per foot and properly dried in. Fully engineered and product approved.	4 Ft. width only and lengths up to 12 Ft. .024 or .032 Alum. facings (.032 white only) 1lb or 2lb density polystyrene foam 4" & 6" thickness available		
ALUMINUM FACING COLOR AND FINISH OPTIONS:				
<ul style="list-style-type: none"> * White, Almond, Ivory, Clay, Silver Satin, and Bronze Stucco Embossed * White Tough Stucco Embossed * White and Almond Cedar Woodgrain 				
				
White Stucco	Ivory Stucco	Almond Stucco	Clay Stucco	Silver Stucco
				
Bronze Stucco	White Cedar	Almond Cedar	White Tuff	



ELITE ALUMINUM CORPORATION

4650 Lyons Technology Parkway • Coconut Creek, FL 33073
954.949.3200 • fax 954.949.3201 www.elitealuminum.com • info@elitealuminum.com

ROOF PARTS CATALOG


ITEM	USE / DESCRIPTION	SPEC'S
 <u>ELITE DOUBLE-FACED TAPERED</u>	Panel used when sidewalls can not be tapered for positive slope. Offers customers preferred flat ceiling and great R-Value.	WIDTHS: 4Ft. only MIN. LENGTHS: 8 Ft. MAX. LENGTHS: 24 Ft. COLOR SELECTION: See note on page 2 Starting Thickness 2", 1/4" per ft. slope only
 <u>ELITE SINGLE FACED TAPERED</u>	Single layer application. Adds positive slope, concealed clip system for attachment, adds R-Value, eliminates removal of old roof.	WIDTHS: 4 Ft. only MIN. LENGTHS: Up to 24 FT. COLOR SELECTION: See note below Starting Thickness 2" 1/4" or 1/8" per ft. slope
 <u>ADVANTECH (OSB) DECK PANEL</u>	Panel used when a raised floor application is required. E.P.S. core is recessed to accept 2x4 & 2x6 lumber as connectors and perimeter finish. Specify standard panel or end panel. 4-7/8" & 6-7/8" thick	WIDTHS: 4 Ft. or 2 Ft. MIN. LENGTHS: 8 Ft. - Max. 24' FACING OPTIONS: 5/8" AdvanTech OSB
 <u>CONCEALED FAN BEAM</u>	Available in any panel thickness when the attachment of a fan or light is required. 2"x3" concealment beam is used as a conduit and for connection integrity. Available with any style panel.	WIDTHS: 4 FT. or half width 22 7/8" LENGTHS: Up to 40 FT. COLOR SELECTION: See note on page 2
 <u>IN PANEL SKYLIGHT</u>	When skylights are desired. Panel is completely prepared, skylight and attachment kit are included. Available in 3", 4" and 6" Elite panel. Double Domed Poly Carbonate. Also available Poly-lite curbed with 1/2" insulated glass.	STANDARD SIZE: 2'x4', 2'x2', 2'x6' and Special Orders COLOR: Earthtone FRAME COLOR: White, Bronze Min. panel length using skylight 6'
 <u>E-LITE</u>	LED lighting system that can be easily installed into 2x3 conduit / fan support. * Core drill 2-5/8" hole through fan beam * Attach wires to electrical source * Slide light into hole and the patented wedge design snaps light into place	10w LED equal to 65w incad. 16%kw usage of electricity 25,000hrs of use vs 1,200hrs Cover Dia: 3" Power: 10 watts Dimmable: Yes



ELITE ALUMINUM CORPORATION

4650 Lyons Technology Parkway • Coconut Creek, FL 33073
954.949.3200 • fax 954.949.3201 www.elitealuminum.com • info@elitealuminum.com

ROOF PARTS CATALOG


ITEM	USE / DESCRIPTION	SPEC'S
 <u>ELITE DOUBLE GUTTER</u>	Protects core material from possible damage. Allows moisture that may intrude the system to exit through a secondary gutter. Two piece hinge design for easy installation.	WIDTHS: 3" & 4" systems LENGTHS: 24 Ft. COLOR SELECTIONS: White, Bronze, Splice Available
 <u>ELITE "D" FASCIA</u>	Used only with Double Gutter. Protects core material from any possible damage. Blends aesthetically with double gutter.	WIDTHS: 3" & 4" systems LENGTHS: 25 Ft. COLOR SELECTION: White or Bronze
 <u>ELITE "E" GUTTER</u>	Protects core material from possible damage. Allows flush finish on bottom side of roof.	WIDTHS: 3" systems LENGTHS: 24 Ft. COLOR SELECTIONS: White, Bronze, Ivory, Almond & Clay Splice Available for 6" system (White only)
 <u>ELITE "E" FASCIA</u>	Used only with "E" Gutter. Protects core material from any possible damage. Blends aesthetically with "E" gutter.	WIDTHS: 3" systems LENGTHS: 25 Ft. COLOR SELECTION: White, Bronze, Almond, Ivory or Clay for 6" system (White only)
 <u>NATURESCAPE 3/4" GUTTER</u>	Protects core material from possible damage. Can be used with 3" or 4" thick roof panels. Also allows for screening to eliminate debris.	WIDTHS: For 3" and 4" systems LENGTHS: 24 Ft. COLOR SELECTION: White, Almond or Bronze
 <u>NATURESCAPE 3/4" FASCIA</u>	Used only with NatureScape gutter. Protects core material from possible damage. Blends aesthetically with NatureScape gutter.	WIDTHS: For 3" and 4" systems LENGTHS: 25 Ft. COLOR SELECTION: White, Almond or Bronze
 <u>DRIP EDGE FASCIA</u>	Extruded trim and closure for Elite Roof System, duplicates fascia and roof edge residential profile. Allows for the application of "K" style residential gutter.	WIDTHS: for 3", 4" & 6" systems LENGTHS: 25 Ft. COLOR SELECTION: White, Almond, Bronze, Clay, Ivory (3" sys. only)
 <u>WALL HEADER</u>	Channel used for attaching Elite panels to existing wall or fascia. Thermally broken for a consistent separation between inside and outside surfaces. Pre-pitched for roof slope.	LENGTHS: 24 Ft. COLOR SELECTIONS: 3" White, Almond, Ivory, Bronze or Clay 4" & 6" White, Almond, Clay



ELITE ALUMINUM CORPORATION

4650 Lyons Technology Parkway • Coconut Creek, FL 33073
954.949.3200 • fax 954.949.3201 www.elitealuminum.com • info@elitealuminum.com

ROOF PARTS CATALOG

ITEM	USE / DESCRIPTION	SPEC'S
 ADJUSTABLE RIDGE BEAM	Used to support load and connect panels at the ridge. Designed to achieve slopes of 1/12 to 7/12. Thermally broken for consistent separation between outside and inside surfaces.	WIDTHS: 3", 4" & 6" Roof system LENGTHS: 24 Ft. COLOR SELECTION: White and Almond
 GABLE RIDGE CONNECTOR	Used as panel connector on gabled roof. Designed for 3/12 slope. Thermally broken for a consistent separation between outside and inside surfaces.	WIDTHS: 3" System only LENGTHS: 24 Ft. COLOR SELECTION: White
 CONCEALED CLIP SYSTEM	Used on the single faced tapered panel system for attaching to an existing deck. Extruded aluminum. 2 piece system for easy adjustment to various panel thicknesses.	Set includes top & bottom clip. Use bottom clip for end panels. Mill Finish
 LAG BOLT W/ DRILL TIP & NEOPRENE WASHER	Used for anchoring uplift on the Elite roof systems. Used at bearing and side walls.	4-7/8", 5-7/8" & 7-7/8" lengths Lags 100 ct. Box3
 PL PREMIUM ADHESIVE	Used for the application of shingles and other type roof materials to the Elite roof.	11 oz. cartridge 12 per carton
 ADHESIVE SEALANT-THERMO PLASTIC	Used for sealing seams and attachment connections. Industrial grade, adhesive quality.	11 oz. cartridge 12 per carton White, Almond & Clear
 SOLAR SEAL SEALANT	Used for sealing and other attachment connections. Industrial grade, adhesive quality, will not harm foam core.	11 oz. cartridge 12 per carton White only
 PEEL & SEAL 250 W/ POWER BOND 4"	Used for sealing seams and other attachment connections. Peel & Seal: Aluminum top facing on a mineral fiber substrate.	PEEL & SEAL: 50 Ft. Roll - 4" Widths White & Almond embossed