


600 PSI

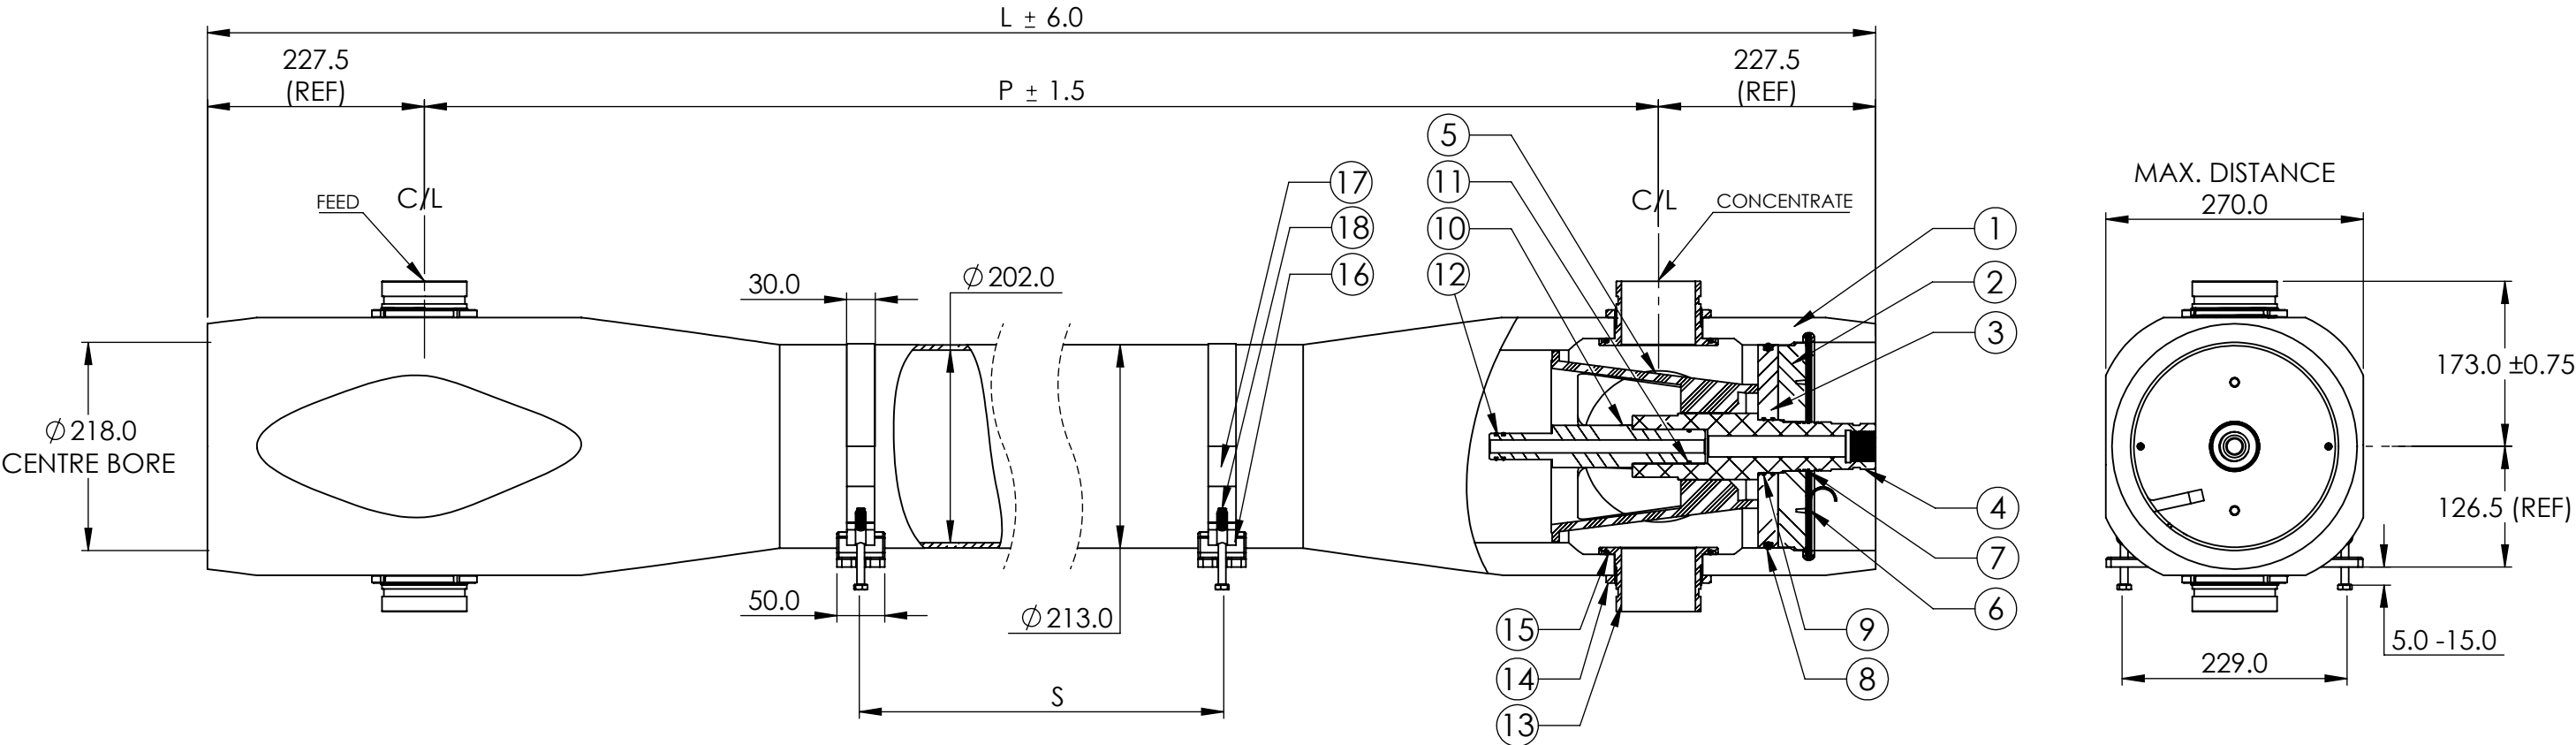

GENERAL DIMENSIONS

Length (No. of Membranes)	P (mm)	L (mm)	S (mm)	Approx Empty Weight ⁽¹⁾ (kg)
1	1255	1710	1x381	58
2	2271	2726	1x1270	65
3	3287	3742	1x2032	72
4	4303	4758	2x1626	79
5	5319	5774	2x1981	86
6	6335	6790	2x2337	93
7	7351	7806	2x2692	99
8	8367	8822	2x3048	106

NOTES:
1. The weight will vary slightly depending on the configuration.

BILL OF MATERIALS

ITEM	QTY	PART NO.	DESCRIPTION	MATERIAL
1	1	10106000	Shell	Filament Wound Fiberglass Reinforced Epoxy
2	2	31514000	Bearing Plate	6061-T6, Aluminium, Hard Anodised
3	2	32110000	Sealing Plate	Engineering Thermoplastic
4	2	33110010*	Permeate Port	Engineering Thermoplastic
5	1	35110000	Thrust Cone	Engineering Thermoplastic
6	2	41121801	Retaining Ring w/ Finger Pull	Stainless Steel, 316L
7	2	42105201	Retaining Ring, Permeate Port	Stainless Steel, 316L
8	2	51119021386	Head Seal	EPDM
9	4	51119005626	Permeate Port Seal	EPDM
10	2	A/R**	Adaptor	Engineering Thermoplastic
11	2	A/R**	Adaptor Seal	EPDM
12	4	A/R**	PWT Seal	EPDM
13	A/R	A/R	F/C Port	Stainless Steel, 316L
14	A/R	A/R	F/C Port Nut	Stainless Steel, 316L
15	A/R	A/R	F/C Port Seal	EPDM
16	2***	60100100	Support Saddle	Thermoplastic Rubber
17	2***	60100200	Strap Assembly	Stainless Steel, 304 / Rubber Cushion
18	4***	60100300	Strap Screw	Stainless Steel, A4

*1.5" grooved connection is provided as standard. Other connection types are available upon request.

**The type of adaptor will depend on the model of the membrane that is to be used.

1 solid type adaptor is provided as standard.

***3 saddle assemblies, including 6 strap screws, are provided for lengths of 4 elements and larger.

Notes:

All dimensions in mm

Drawing for reference only, not for construction unless certified by ROShell

For vessel installation and maintenance please refer to ROShell user's manual

RS.80.0600 model available side port sizes:
1.5" / 2" / 2.5" / 3" / 4"

Internal permeate pressure must not exceed 125 psi

Design pressure: 600 psi

Design Temperature: Min. -7°C (20°F) / Max. 49°C (120°F)

For other temperatures out of this range contact ROShell

Hydrotest pressure: 600 x 1.1 psi



RS.80.0600

DRAWN BY:
AA

CHECKED BY:
MR

APPROVED BY:
TR

DRAWING NO.
901003

REVISED
19/08/2025

REV
R1