


XSens-TC-T-TEF-RC



Xpert Sensor Thermocouple type T, Teflon coated with Rapid Connector




- + 1 Proprietary connector with unique S/N and 30 cm thermocouple extension with FEMALE Rapid Connector attached
- + Includes 1 empty MALE Rapid Connector
- + Compatible with XpertVal64 and XpertMon
- + Compatible only with Type T thermocouple
- + Thermocouple NOT included

Accuracy uncalibrated
Measurement range
Gauge
Sensor length
Cable type
Tip

$\pm 0.5^{\circ}\text{C}$ or 0.4% (whichever is greater)
-200 to $+200^{\circ}\text{C}$
24 AWG
5/6/10/12 m (17/20/33/40 feet)
Teflon
Teflon, welded

Order Reference

XSens-TC-T-TEF-RC-5m
XSens-TC-T-TEF-RC-6m
XSens-TC-T-TEF-RC-10m
XSens-TC-T-TEF-RC-12m

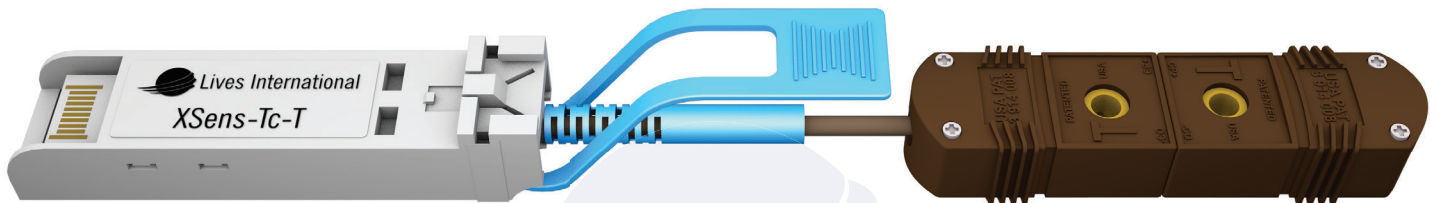

Lives International[®]
Raising Standards

