Zig Sound-Absorbing Decorative Panel

600mm x 600mm x 13mm



		Inherent Colors	Color-IT Colors	Peel & Stick (Optional)
PRODUCT CODE / DESCRIPTION	**Box Qty /m2**			
ZIG-20AAN - Inherent Colors (Panel Only)	12 / 4.32 m2			
ZIG-20PSN - Inherent Colors + Peel & Stick	12 / 4.32 m2			
ZIG-20AAC - Color-IT (Panel Only)	12 / 4.32 m2			
ZIG-20PSC - Color-IT + Peel & Stick	12 / 4.32 m2			

APPLICATION
Wall & Ceiling - Indoor use only
MATERIAL
Mechanical needled punch industrial felt.
100% PET up to 60% Recycled content & Recyclable

Smooth Surface - Impact Resistance - Flexible

FIRE RATING
A Class (ASTM E84) - B s1 d0 (EN 13501-1)
THERMAL INSULATION
0,035 W/mK
WEIGHT
1 tile: 450 gr. +/- 10% tolerance
1 tile: 1 lb with +/- 10% tolerance

THICKNESS

Max. 13 mm (+/- 2 mm) - 0.51" (+/-0.08")
Min. 3 mm (+/- 2 mm) - 0.12" (+/-0.08")
BOX SIZE & CONTENT
W: 620 mm D: 660 mm H: 190 mm
W: 24.5" D: 26" H: 7.5"
1 Box: 12 x panels
1 Box: 4.32 m2 *1 Box: 46.50 ft2*
1 Color of choice per package
Gross weight: 6.8 kg *Gross weight: 15 lbs*

PALETTE SIZE & CONTENT

W: 1220 mm D: 1015 mm H: 2150 mm
W: 48" D: 40" H: 84.5"
30 Pcs. Box
Gross Weight
227 kg
501 lbs



W: 1200 mm D: 800 mm H: 2150 mm
W: 47.25" D: 31.5" H: 84.5"
24 Pcs. Box
Gross Weight
182 kg
401 lbs



ACOUSTIC PERFORMANCE

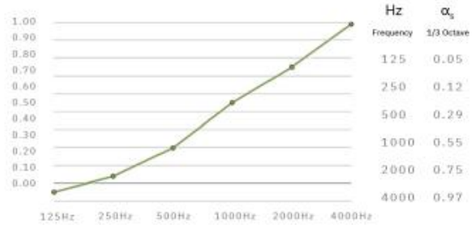

Reference Product: Bold	α_w According to ISO 11654	NRC According to ASTM C423	SAA Sound Absorption Average	Class Sound Absorption
Zig	0.35	0.45	0.46	D

αs Sound absorption coefficient according to ISO 354 αp Practical sound absorption coefficient according to ISO 11654

Zag Sound-Absorbing Decorative Panel

600mm x 600mm x 13mm



		Inherent Colors	Color-IT Colors	Peel & Stick (Optional)
PRODUCT CODE / DESCRIPTION	**Box Qty /m2**			
ZAG-20AAN - Inherent Colors (Panel Only)	12 / 4.32 m2			
ZAG-20PSN - Inherent Colors + Peel & Stick	12 / 4.32 m2			
ZAG-20AAC - Color-IT (Panel Only)	12 / 4.32 m2			
ZAG-20PSC - Color-IT + Peel & Stick	12 / 4.32 m2			



APPLICATION
Wall & Ceiling - Indoor use only
MATERIAL
Mechanical needled punch industrial felt.
100% PET up to 60% Recycled content & Recyclable

Smooth Surface - Impact Resistance - Flexible

FIRE RATING
A Class (ASTM E84) - B s1 d0 (EN 13501-1)
THERMAL INSULATION
0,035 W/mK
WEIGHT
1 tile: 450 gr. +/- 10% tolerance
1 tile: 1 lb with +/- 10% tolerance

THICKNESS

Max. 13 mm (+/- 2 mm) - 0.51" (+/-0.08")
Min. 3 mm (+/- 2 mm) - 0.12" (+/-0.08")
BOX SIZE & CONTENT
W: 620 mm D: 660 mm H: 190 mm
W: 24.5" D: 26" H: 7.5"
1 Box: 12 x panels
1 Box: 4.32 m2 *1 Box: 46.50 ft2*
1 Color of choice per package
Gross weight: 6.8 kg *Gross weight: 15 lbs*

PALETTE SIZE & CONTENT

W: 1220 mm D: 1015 mm H: 2150 mm
W: 48" D: 40" H: 84.5"
30 Pcs. Box
Gross Weight
227 kg
501 lbs



W: 1200 mm D: 800 mm H: 2150 mm
W: 47.25" D: 31.5" H: 84.5"
24 Pcs. Box
Gross Weight
182 kg
401 lbs



ACOUSTIC PERFORMANCE

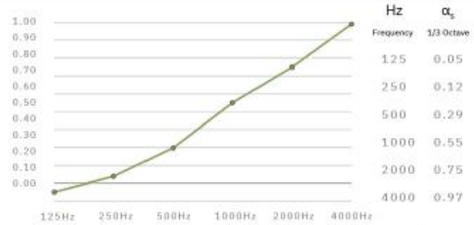

Reference Product: Bold	α_w According to ISO 11654	NRC According to ASTM C423	SAA Sound Absorption Average	Class Sound Absorption
Zag	0.35	0.45	0.46	D

αs Sound absorption coefficient according to ISO 354 αp Practical sound absorption coefficient according to ISO 11654