

PRODUCT DATASHEET

DIESEL PORTABLE GENERAL PURPOSE PUMP

IMP12D-110-DVS



1000
m³/h

66m
MAX HEAD

12" x 12"
FLANGE

SCAN HERE



The IMPELLR Dry Prime pump range delivers fast response to de-watering applications and can be situated in remote locations. The Diesel engine powered pump set features a 100% mechanical diaphragm priming system that will suck even in dry conditions. Many user friendly features that help professionals keep sites waterlogged free or transfer liquids with solids quickly from a lagoon or lake with pipework, filtration, pipe ramps and many more IMPELLR de-watering equipment.

IMPELLR FEATURES

Positioning of Pump

Durable lifting eyes and fork pockets enable safe manoeuvre, allowing the pump to be placed into difficult areas.



Easy Access doors

Made for practical access and easy maintenance of oil glasses, float box, impeller, non-return valve and more.



Spiral Impeller

Durable 2-blade spiral smooth flow open impeller for solids handling of site water, sewage and more viscous fluids



Secure Connections

Float switch sockets and Fuel feed and return couplers in secure location.



HVO Compatible Stage V Engines

Stage 5 engines for compliance and smooth running. Bunded fuel tank.



CONNEX


by Impellr

On-device Controller:

- Auto Start / Stop System
- Switch On / Off
- Tachnometer
- Hour Counter
- Warning Lights
- Two Float Switches
- Support for Automatic operation
- Tracked using CONNEX Cloud



PERFORMANCE CURVES

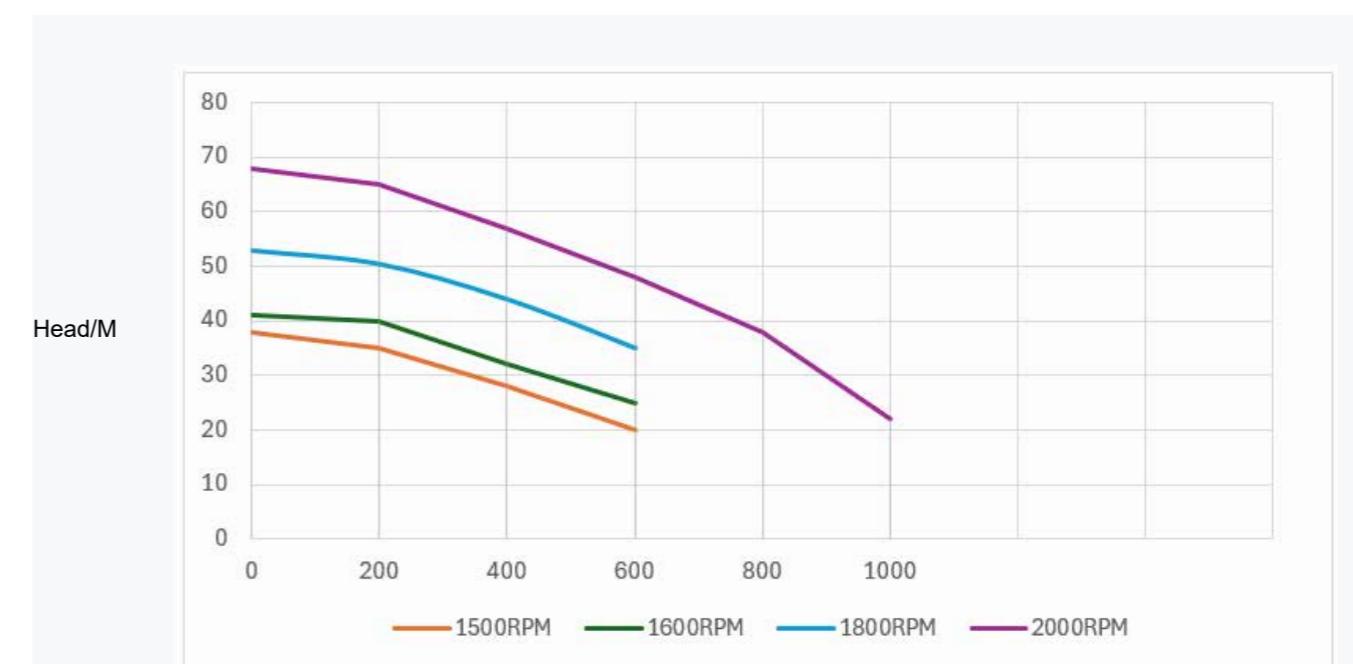

IMP12D-110-DVS - Pump


Max Flow M3/hr (USGPM)	1000 (4400)	Suction/Discharge mm (inch)	300 (12") / 300 (12")
Max Closed Head M (FT)	66 (216)	Impellr Type	2-Blade Spiral Open
Efficiency	70%	Solids Handling mm (inch)	90 (3.54")
BEP Flow M3/hr (USGPM)	540 (2377)	Impeller & Volute Material	Ductile Iron
BEP Head M (Ft)	50 (164)	Pump Shaft	Stainless Steel 17-4PH
NPSHr @ BEP M (Ft)	n/a	Priming System	Mech Drive Diaphragm -50 m3/hr

Engine - 110 Kw (147 HP)

Engine Type / Model	Deutz TCD3.9	Speed RPM	1250 - 2000
Exhaust After Treatment	DPF / DOC/SCR	Service Intervals Hrs	500 / 12 Months
Fuel Tank Size Litre (USG)	300 (80)	Emissions Standard	Stage V

Canopy / Controls

Weight with fuel Kg (Lbs)	Approx, 2650 (5842)	Dimensions LxWxH mm (inch)	2800x1150+525x1980 (95x45+20x78)
Noise Level (dB) @ 7m	66	Controls	Connex Electronic
Internal / External Lighting	Standard 12V	Telemetry Control	Connex 2 Year Free
Battery Charger	Standard 240/110V	Fire Extinguisher	Standard 3Kg Dry Powder

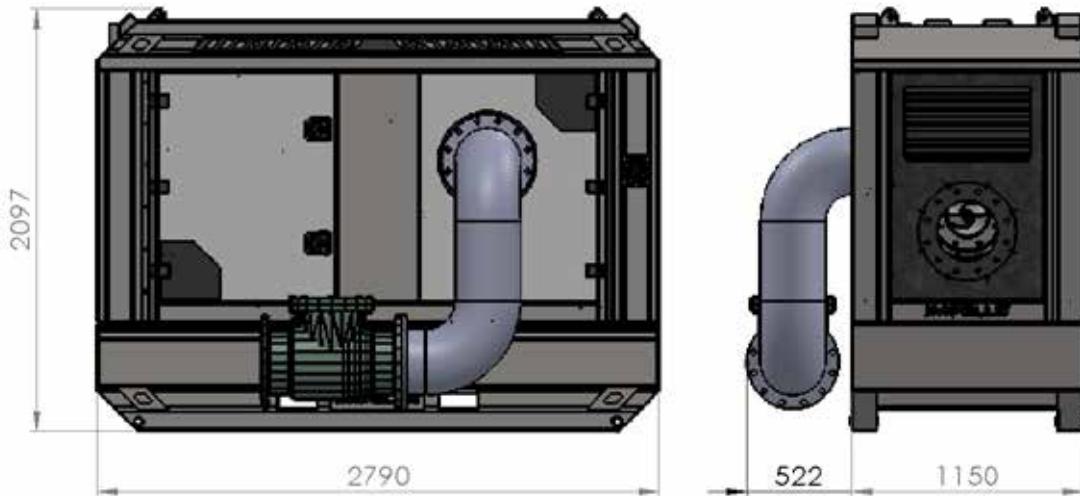

Trailer Mountable

A range of road and site-tow-spec trailers are available with optional hose and equipment carriers.



Pipework

A range of Bauer couplers, strainers and flanged pipework available.



Smart Software

Our CONNEX software platform allows you to manage and control your pumps remotely, with telemetry and more.



Hose and Pipes

Reinforced rubber suction and HDPE or galvanised steel pipes



Pipe Ramps

1M, 3M and 5.5M road ramps for easy vehicle or pedestrian access



Settlement Tanks

2.5, 6, 8 and 12 meter cube galvanised or painted settlement tanks with a range of outlet options.

