

SUPERLOCK 2.0 KEYED LATCH DEADLOCK



5-Year Warranty

Universal Handing

Adjustable latchbolt

Suitable for metal gate frames. For wooden gates, our surface-mounted option is available.

INCLUDED IN THE BOX

- 2.5mm hex key + 3mm hex key
- 2 x M8 fixing bolts
- Face plate
- Latchbolt
- Strike plate (2 x self-drilling fasteners)
- A set of keys (3)
- A set of handles



Convenient, everyday latch access with the added security of a deadlock in one slim bolt-on lock. The Bolt-On Latch Deadlock combines convenient handle-operated access for daily use with keyed deadlocking when extra security is needed.

Product code	Description
BLD1030P	To fit 10-30mm (½" to 1 ¼") gate frames with plain handles
BLD1030T	To fit 10-30mm (½" to 1 ¼") gate frames with traditional handles
BLD4060P	To fit 40-60mm (1 ½" to 2 ¼") gate frames with plain handles
BLD4060T	To fit 40-60mm (1 ½" to 2 ¼") gate frames with traditional handles
Available in:	Black RAL9005 Moss Green RAL6005

HELP & SUPPORT



www.clafabrications.co.uk



0121 272 1777



sales@cla-group.co.uk

WHAT DOES LATCH DEADLOCK MEAN?

Lock Type



Latch
Deadlock

What happens
when the gate
closes?



Latches shut
automatically,
but doesn't lock

What do I need
to do next to
lock the gate?



Use the key if
you want to
lock the gate

Best for:

Best for convenience,
when you want the
gate to catch and
open conveniently
with the handle, then
choose when to fully
lock it.



Traditional lever
handle set



Plain lever
handle set

INSTALLATION INSTRUCTIONS

1. Drill 2 x 9mm (3/8") holes at 140mm (5 1/2") centres for fixing bolts provided.
2. Drill a 18mm (3/4") clearance hole for the latchbolt at 60mm (2 3/8") centres up from the bottom fixing hole.
3. Hold the lock against the back of the box section and screw on the latchbolt through the larger hole. Fixing the lock in place using the stainless steel bolt support plate and the countersunk screws provided. Ensure the latchbolt moves freely.
4. Lock the latchbolt with the hex key supplied by inserting the hex key into the end of the latchbolt.
5. Fix strike plate by either welding or screw fixing onto the gate post.

Step 1 & 2:




Step 3:



Step 4:



Dimension drawing:

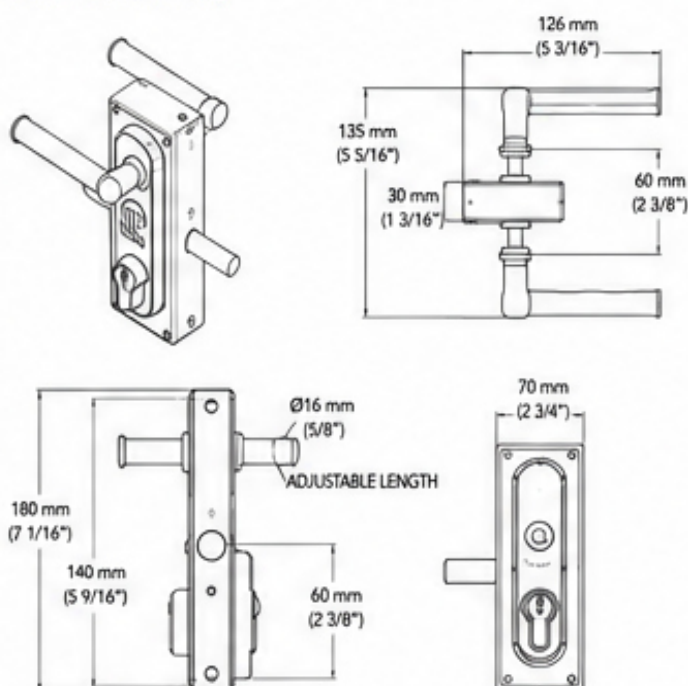

MAINTENANCE

Every 6 months:

- Lubricate the latchbolt with light oil.
- Dismantle the lock and spray mechanism with light oil.

Annually:

- Dismantle the lock and spray mechanism with light oil.

COMPATIBLE PRODUCTS

To help improve gate security and overall performance, The Superlock 2.0 can be paired with a range of Gatemaster products. These options are designed to work alongside your gate lock, helping create a stronger, safer and more complete gate installation.



Superlock Secure Keep (BSK)

- Designed to enhance gate security by preventing access to the latchbolt.
- Slim, low-profile design provides a sleek, modern appearance that improves the overall look of the gate.
- Versatile, simple, and easy to install, suitable for a wide range of gate and fencing applications.



Superhinge (SH)

- Tested for over 500,000 gate openings without any sign of wear, equating to approximately 50 years of daily use at 25 gate openings per day.
- Capable of supporting gates weighing up to 900kg.
- Ideal for both automated and manual gates.
- Available in multiple sizes with adjustable installation options and corner-lug variations.



Hydraulic Gate Closer (APS)

- Provides safe, reliable gate closing using a proven hydraulic mechanism, ideal for schools or playgrounds.
- Designed to support gates up to 150kg.
- Available with either a standard top hinge or an integrated 90° stop, offering a durable, unobtrusive, and maintenance-free solution.
- Requires no power.

