

BASIC PROPERTIES

Basis Weight (nominal)	gsm	40	42	45	48.8
Moisture Content	%	8.5	9.2	9.2	9.2

STRUCTURAL PROPERTIES

Caliper	µm	67	70	74	77
Roughness (max)	µm	3.0	3.3	3.3	3.3

OPTICAL PROPERTIES

Brightness	ISO	56	56	56	56
Opacity (min)	%	92	93	94	95
L*	unit	78.7	78.7	78.7	78.7
a*	unit	-1.0	-1.0	-1.0	-1.0
b*	unit	3.4	3.4	3.4	3.4

MECHANICAL PROPERTIES

Tear index, CMD	mN	250	300	310	340
Tensile index, MD	kN/m	2.2	2.3	2.4	2.4
Stretch, MD	%	1.1	1.1	1.1	1.1

Note: (1) Values shown are typical target values; normal operational variances occur
 (2) Caliper shown is Boyer.
 (3) Shade targets are Boyer. Controlled to L*a*b*, ISO approximate
 (4) Moisture measured by ABB is approx. 1 point lower

PRODUCTION DATA

Mill of supply

Boyer

Roll width range

300mm - 2060mm

Diameters (mm)

1015 - 1265

Core size

76mm (inner)

ENVIRONMENT


- 100% plantation softwood fibre
- All fibre is sourced from well managed plantation forests and other controlled sources
- No native timber used
- Elemental chlorine free

CERTIFICATION

- Certification ISO 14001
- FSC Forest Management and Chain of Custody
- AFS / PEFC Forest Management and Chain of Custody

For more information & samples, please
contact your Boyer Account Team

account.representatives@boyercorporation.au
www.boyercorporation.au

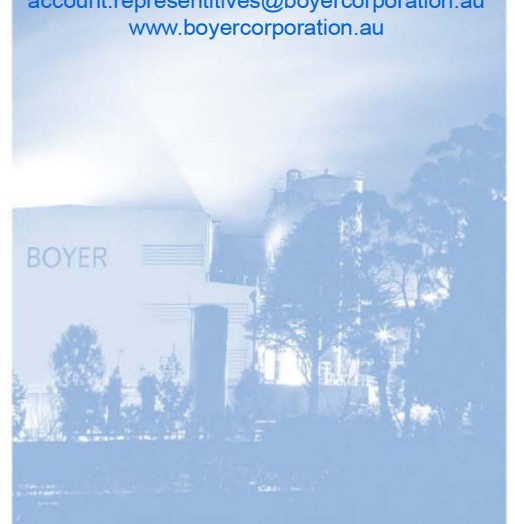

OUR MILL | OUR VISION | OUR CHOICE
 INSPIRE, INNOVATE, COOPERATE