

BASIC PROPERTIES

Basis Weight (nominal)	gsm	48.8	55	60
Moisture Content	%	9.2	8.8	8.8

STRUCTURAL PROPERTIES

Caliper	µm	77	83	94
Roughness (max)	µm	3.7	3.7	4.1

OPTICAL PROPERTIES

Brightness	ISO	75	75	75
Opacity (min)	%	87	91	93
L*	unit	87.0	87.5	87.5
a*	unit	-1.4	-1.4	-1.4
b*	unit	-1.4	-1.4	-1.4

MECHANICAL PROPERTIES

Tear index, CMD	mN	400	420	460
Tensile index, MD	kN/m	2.4	2.4	2.7
Stretch, MD	%	1.2	1.2	1.2

Note: (1) Values shown are typical values; normal operational variances occur
 (2) Shade controlled to L*, a*, b*, ISO approximate

PRODUCTION DATA

Mill of supply

Boyer

Roll width range

300mm - 2060mm

Diameters (mm)

1015 - 1265

Core size

76mm (inner)

ENVIRONMENT


- 100% plantation softwood fibre
- All fibre is sourced from well managed plantation forests and other controlled sources
- No native timber used
- Elemental chlorine free

CERTIFICATION

- Certification ISO 14001
- FSC Forest Management and Chain of Custody
- AFS / PEFC Forest Management and Chain of Custody

For more information & samples, please
contact your Boyer Account Team

account.representatives@boyercorporation.au
www.boyercorporation.au

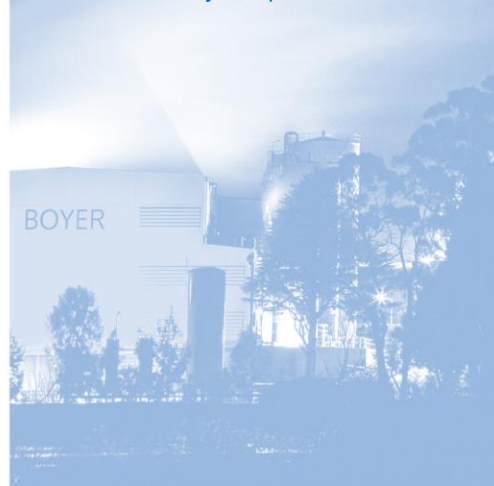

OUR MILL | OUR VISION | OUR CHOICE
 INSPIRE, INNOVATE, COOPERATE