

BASIC PROPERTIES

Basis Weight (nominal)	gsm	52	55	65	75
Moisture Content	%	8.0	8.0	8.5	8.8

STRUCTURAL PROPERTIES

Caliper	µm	114	120	140	160
---------	----	-----	-----	-----	-----

OPTICAL PROPERTIES

Brightness	ISO	70	69	69	69
Opacity (min)	%	89	90	92	93
L*	unit	91.4	91.4	91.4	91.4
a*	unit	-0.9	-0.4	-0.4	-0.4
b*	unit	9.4	9.9	9.9	9.9

MECHANICAL PROPERTIES

Tear index, CMD	mN	410	425	500	600
Tensile index, MD	kN/m	2.5	2.6	2.8	3.0
Stretch, MD	%	1.1	1.2	1.2	1.2

Note: (1) Values shown are typical values; normal operational variances occur
 (2) Shade controlled to L*, a*, b*, ISO approximate

PRODUCTION DATA

Mill of supply

Boyer

Roll width range

300mm - 2060mm

Diameters (mm)

1015 - 1265

Core size

76mm (inner)

ENVIRONMENT


- 100% plantation softwood fibre
- All fibre is sourced from well managed plantation forests and other controlled sources
- No native timber used
- Elemental chlorine free

CERTIFICATION

- Certification ISO 14001
- FSC Forest Management and Chain of Custody
- AFS / PEFC Forest Management and Chain of Custody

For more information & samples, please
contact your Boyer Account Team

account.representatives@boyercorporation.au
www.boyercorporation.au

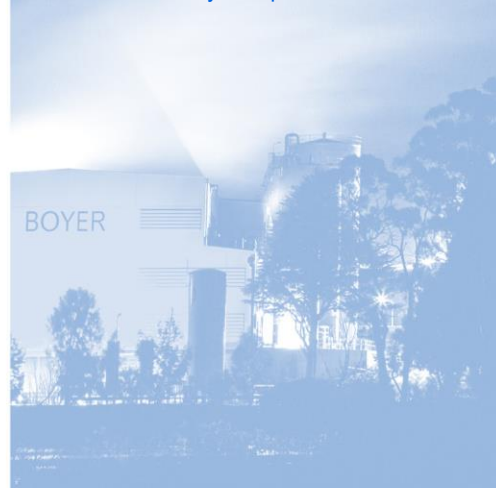

OUR MILL | OUR VISION | OUR CHOICE
 INSPIRE, INNOVATE, COOPERATE