

BASIC PROPERTIES

Basic Weight (nominal)	gsm	52
Moisture Content	%	9.2

STRUCTURAL PROPERTIES

Caliper	µm	120
Roughness (max)	µm	5.0

OPTICAL PROPERTIES

Brightness	ISO	60
Opacity (min)	%	95.5
L*	unit	78.2
a*	unit	-1.0
b*	unit	3.4

MECHANICAL PROPERTIES

Tear index, CMD	mN	255
Tensile index, MD	kN/m	2.5
Stretch, MD	%	1.1

Note: (1) Values shown are typical target values; normal operational variances occur
(2) Caliper shown is Boyer.
(3) Shade targets are controlled to L*a*b*, ISO approximate
(4) Moisture measured by ABB is approx. 1 point lower

PRODUCTION DATA

Mill of supply

Boyer

Roll width range

300mm - 2060mm

Diameters (mm)

1015 - 1265

Core size

76mm (inner)

ENVIRONMENT


- 100% plantation softwood fibre
- All fibre is sourced from well managed plantation forests and other controlled sources
- No native timber used
- Elemental chlorine free

CERTIFICATION

- Certification ISO 14001
- FSC Forest Management and Chain of Custody
- AFS / PEFC Forest Management and Chain of Custody

For more information & samples, please
contact your Boyer Account Team

account.representatives@boyercorporation.au
www.boyercorporation.au

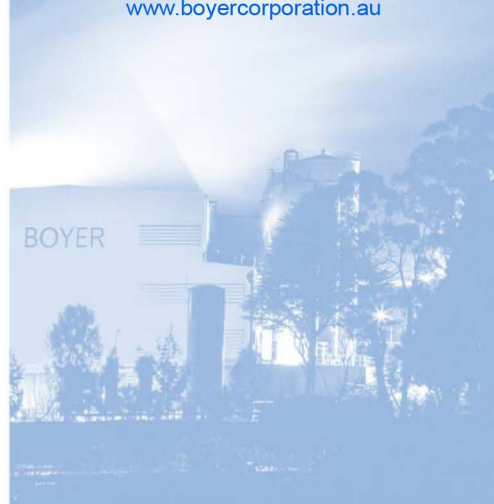

OUR MILL | OUR VISION | OUR CHOICE
INSPIRE, INNOVATE, COOPERATE