


D-Neo Wall-mounted toilet # 257709..00 / 257709..00 / 257709..00

|< 370 mm >|

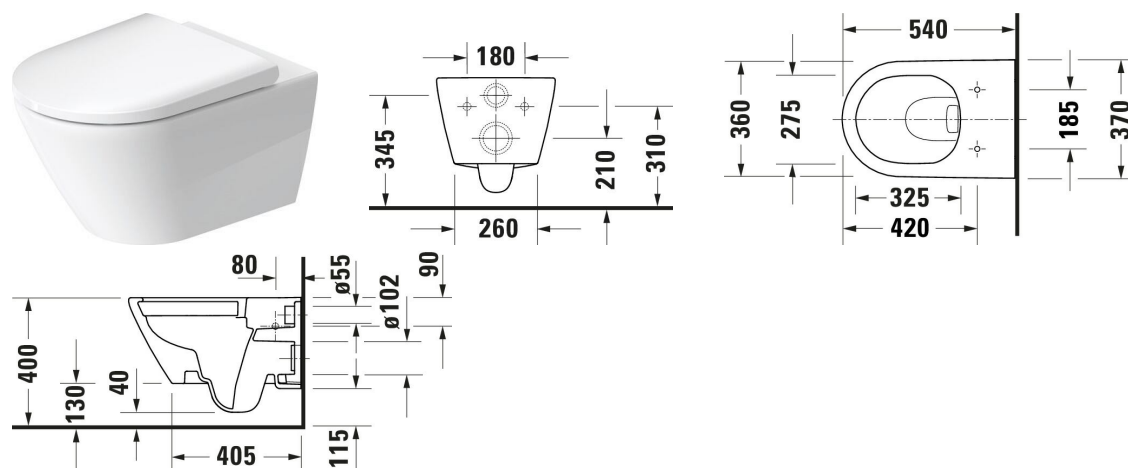

Wall-mounted toilet	Dimension	Weight	Order number
Washdown model, Rimless, Flush principle: ousting, Outlet drain horizontal, Fixing included: Durafix, Unified Water Label (UWL) Class: 1			
Colors			
00 White High Gloss AC White Satin Matt, DuraShield AD Anthracite Matt, DuraShield			
Variant			
♣ White High Gloss, Flush water quantity: 4,5/3 l	370x540 mm	23.200 kg	257709..00
♣ White Satin Matt, DuraShield	370x540 mm	23.200 kg	257709..00
♣ Anthracite Matt, DuraShield	370x540 mm	23.200 kg	257709..00
Accessory for ceramics			
Fixation Suitable for Wall-mounted bidet, Wall-mounted toilet	70 x 10 mm	0.05 kg	006500
Accessory			
Noise reduction set	420 x 390 mm	0.2 kg	005090
Suitable products			
Toilet seat Soft-closing: No, Hinge material: Stainless steel, 376 x 441 mm	376 x 441 mm		002161
Toilet seat Soft-closing: Yes, Hinge material: Stainless steel, 376 x 441 mm	376 x 441 mm		002169

D-Neo Wall-mounted toilet # 257709..00 / 257709..00 / 257709..00

| < 370 mm > |

<p>Installation element dry installation for toilet Standard 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l, 155 x 500 mm</p>	155 x 500 mm	WD1011
<p>Installation element dry installation for toilet Hygienic flush, 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Electronic, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l, 155 x 500 mm</p>	155 x 500 mm	WD1013
<p>Installation element dry installation for toilet Odor extraction, Fan activation: Automatic, Manual, At the touch of a button, Touchless, Hygienic flush, 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Electronic, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l, 155 x 500 mm</p>	155 x 500 mm	WD1014
<p>Installation element dry installation for toilet Standard 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l, 155 x 500 mm</p>	155 x 500 mm	WD1016
<p>Installation element dry installation for toilet Basic 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l, 155 x 500 mm</p>	155 x 500 mm	WD1017
<p>Installation element dry installation for toilet Standard 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l, 155 x 500 mm</p>	155 x 500 mm	WD1018

D-Neo Wall-mounted toilet # 257709..00 / 257709..00 / 257709..00

|< 370 mm >|

<p>Installation element dry installation for toilet Basic 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l, 155 x 500 mm</p>	155 x 500 mm	WD1019
<p>Installation element dry installation for toilet Basic 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l, 155 x 500 mm</p>	155 x 500 mm	WD1020

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.