

Datasheet

HERD-2



High-Energy-Radiation-Drain IR Blocking Filter

HERD-2 is a non-magnetic SMA inline infrared blocking filter based on our High-Energy Radiation Drain technology (HERD). The HERD-2 filter is designed to be much more compact than its predecessor HERD-1, providing similar, ultra-low in-band losses with improved filtration in the stopband. The filter features an integrated carbon-based absorber, well thermalized to the gold-plated copper body.



Product Specifications

Design impedance	50 Ω
Passband	DC-13.5 GHz
Stopband	70-145 (min.) GHz
Insertion loss (passband)	Typ. < 0.15 dB (DC-8GHz)
Return loss (passband)	Typ. > 20 dB (DC-13.5 GHz)
Insertion loss (stopband)	Typ. > 65 dB (70-120 GHz)
Return loss (> 20 GHz)	Typ. > 7 dB
RF Connectors	Male/Female SMA, SMP, SMPM, SMPS **
** Contact Sweden Quantum for alternative configurations	

Absolute max ratings

Parameter	Min	Max
Operating Temperature	0 K	320 K
RF input power	-	30 dBm



Mechanics

Length	63 mm
Width	9.525 mm

NOTE: Not tested in liquid-cooled cryostats


RoHS compliant

Measurement Data (RT)

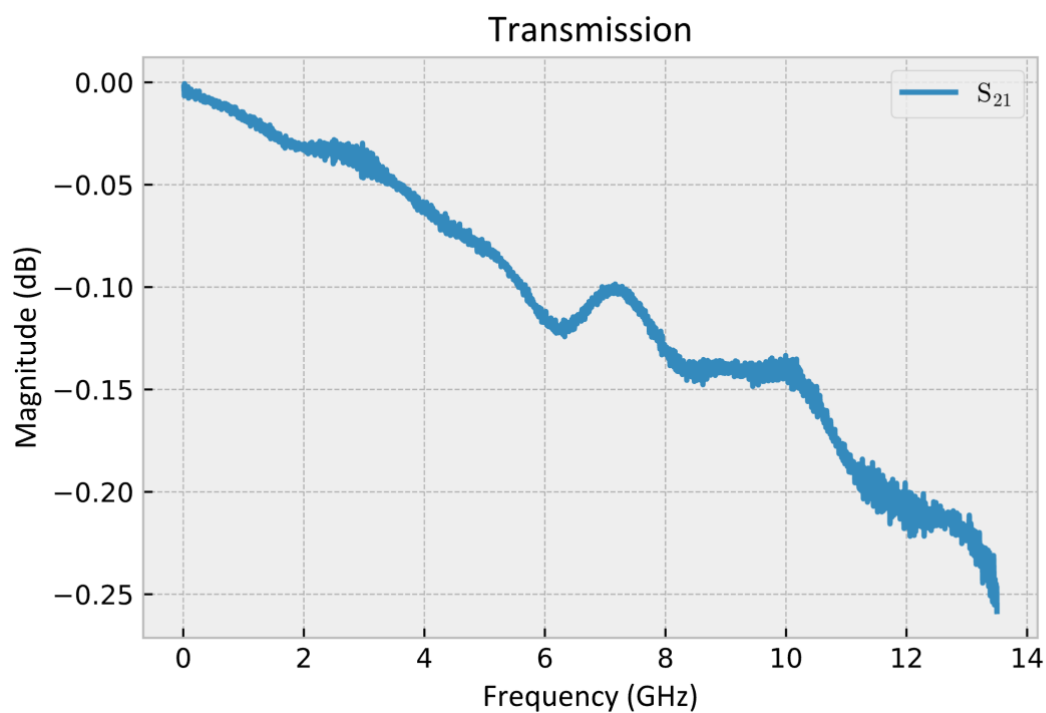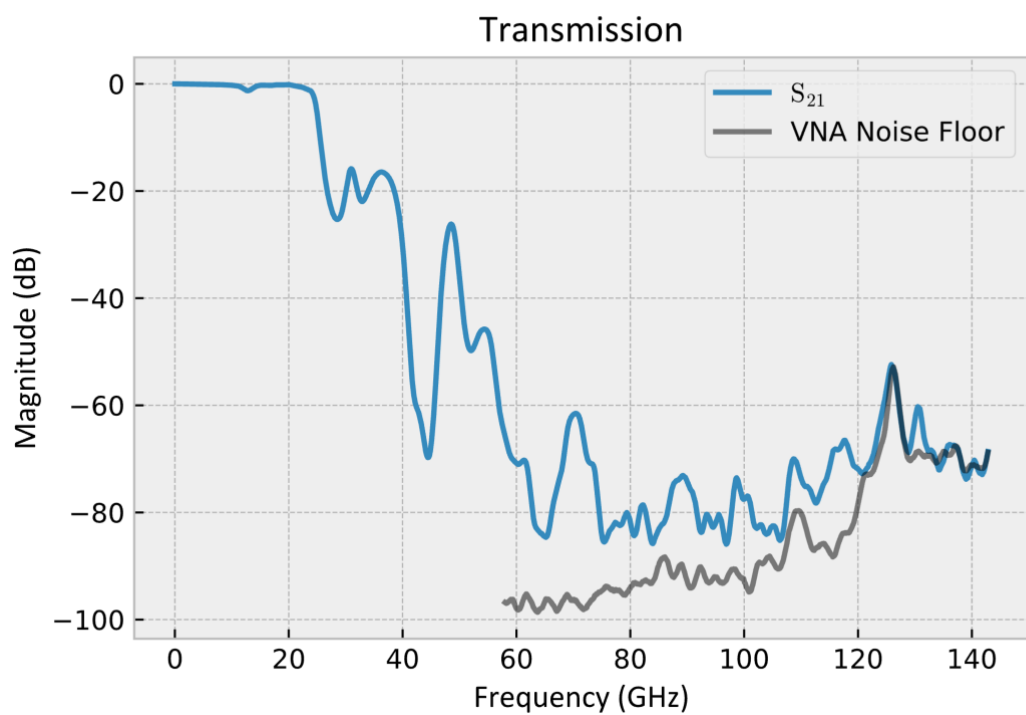

RoHS compliant

Measurement Data (RT)

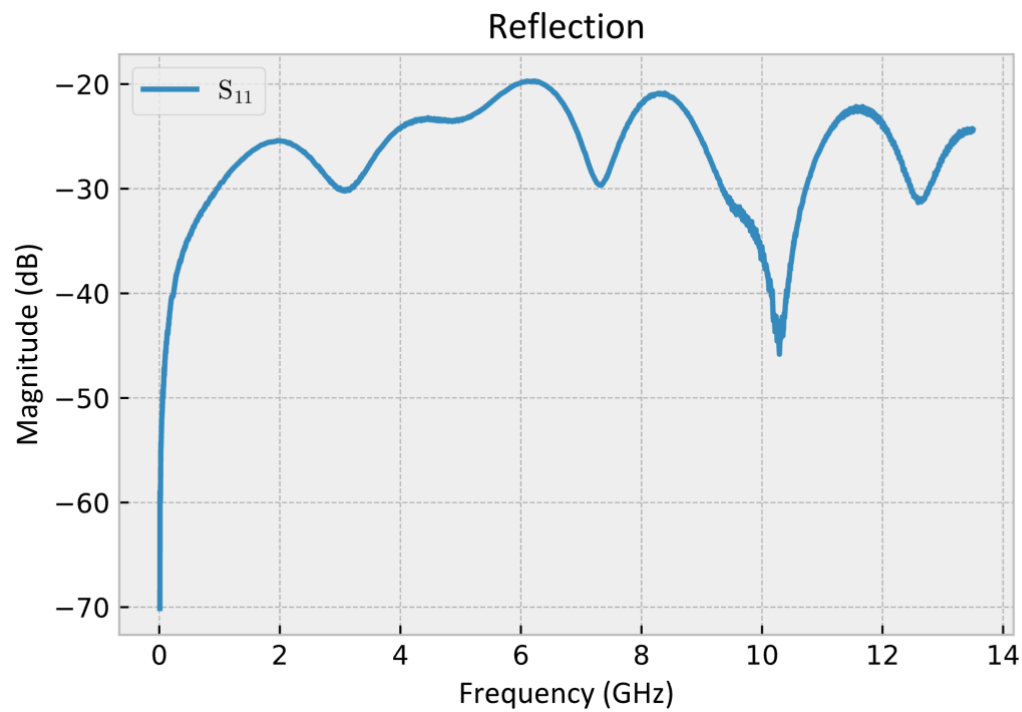


RoHS compliant

Date
2024-06-17

Datasheet Rev. 1
HERD-2
High-Energy-Radiation-Drain IR blocking filter

Dimensions (mm)

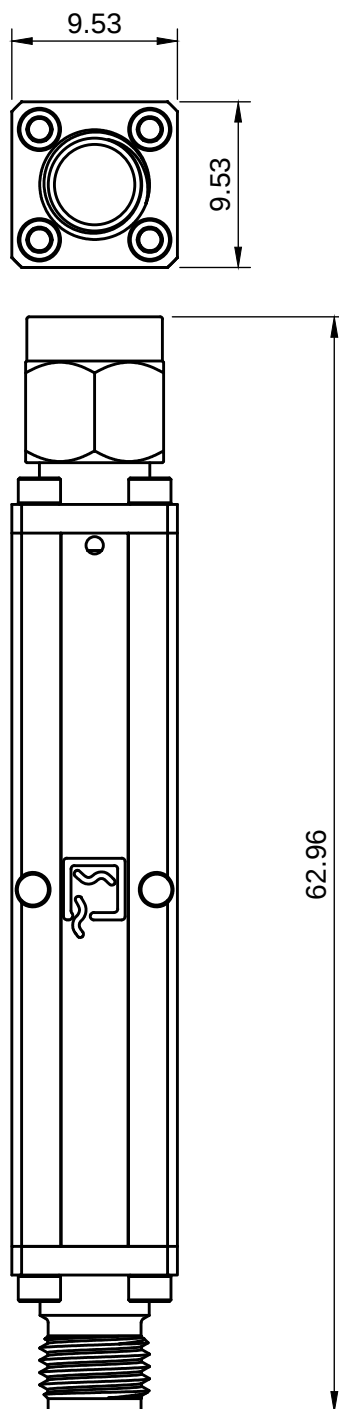

RoHS compliant