





Sheet: /		Date: 2026-01-06	
File: TOFU5lite.kicad_sch		Rev: 1.3	
Size: A4	KiCad E.D.A. 9.0.6		Id: 1/10

USB3.0 Hub (4x)


USB2.0 as device or host

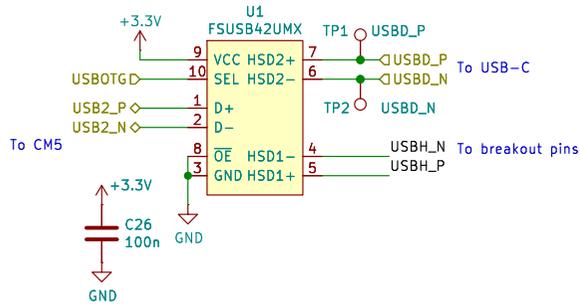

Optional USB breakout

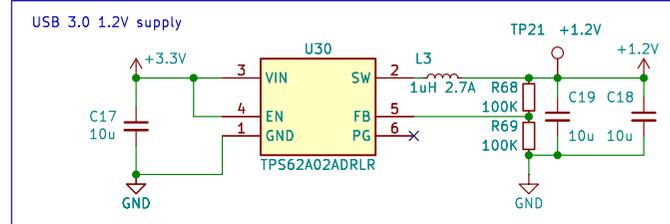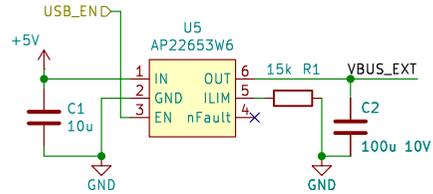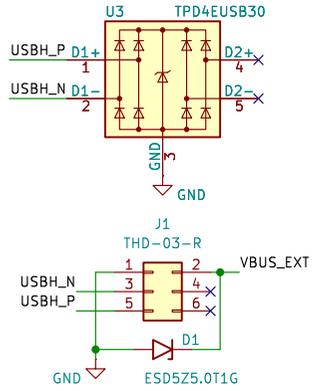

U2
USB5744T_2GX01

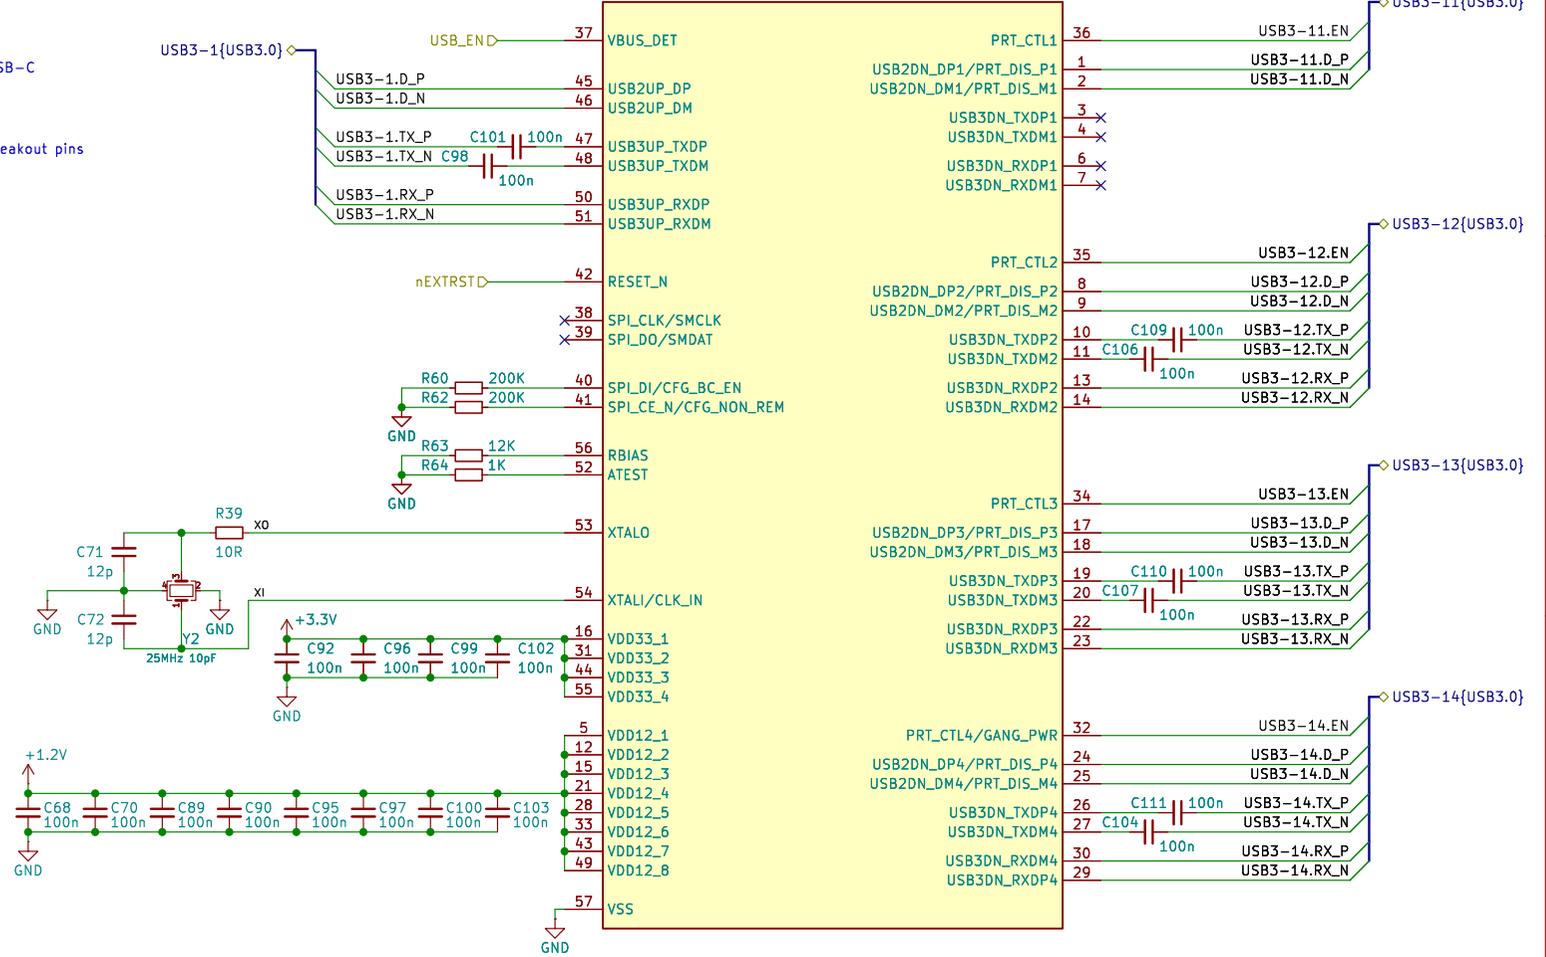

www.oratek.com

Sheet: /USB/
File: TOFU5lite_USB.kicad_sch


Title: TOFU5

Size: A4 Date: 2026-01-06


KiCad E.D.A. 9.0.6

Rev: 1.3


Id: 2/10

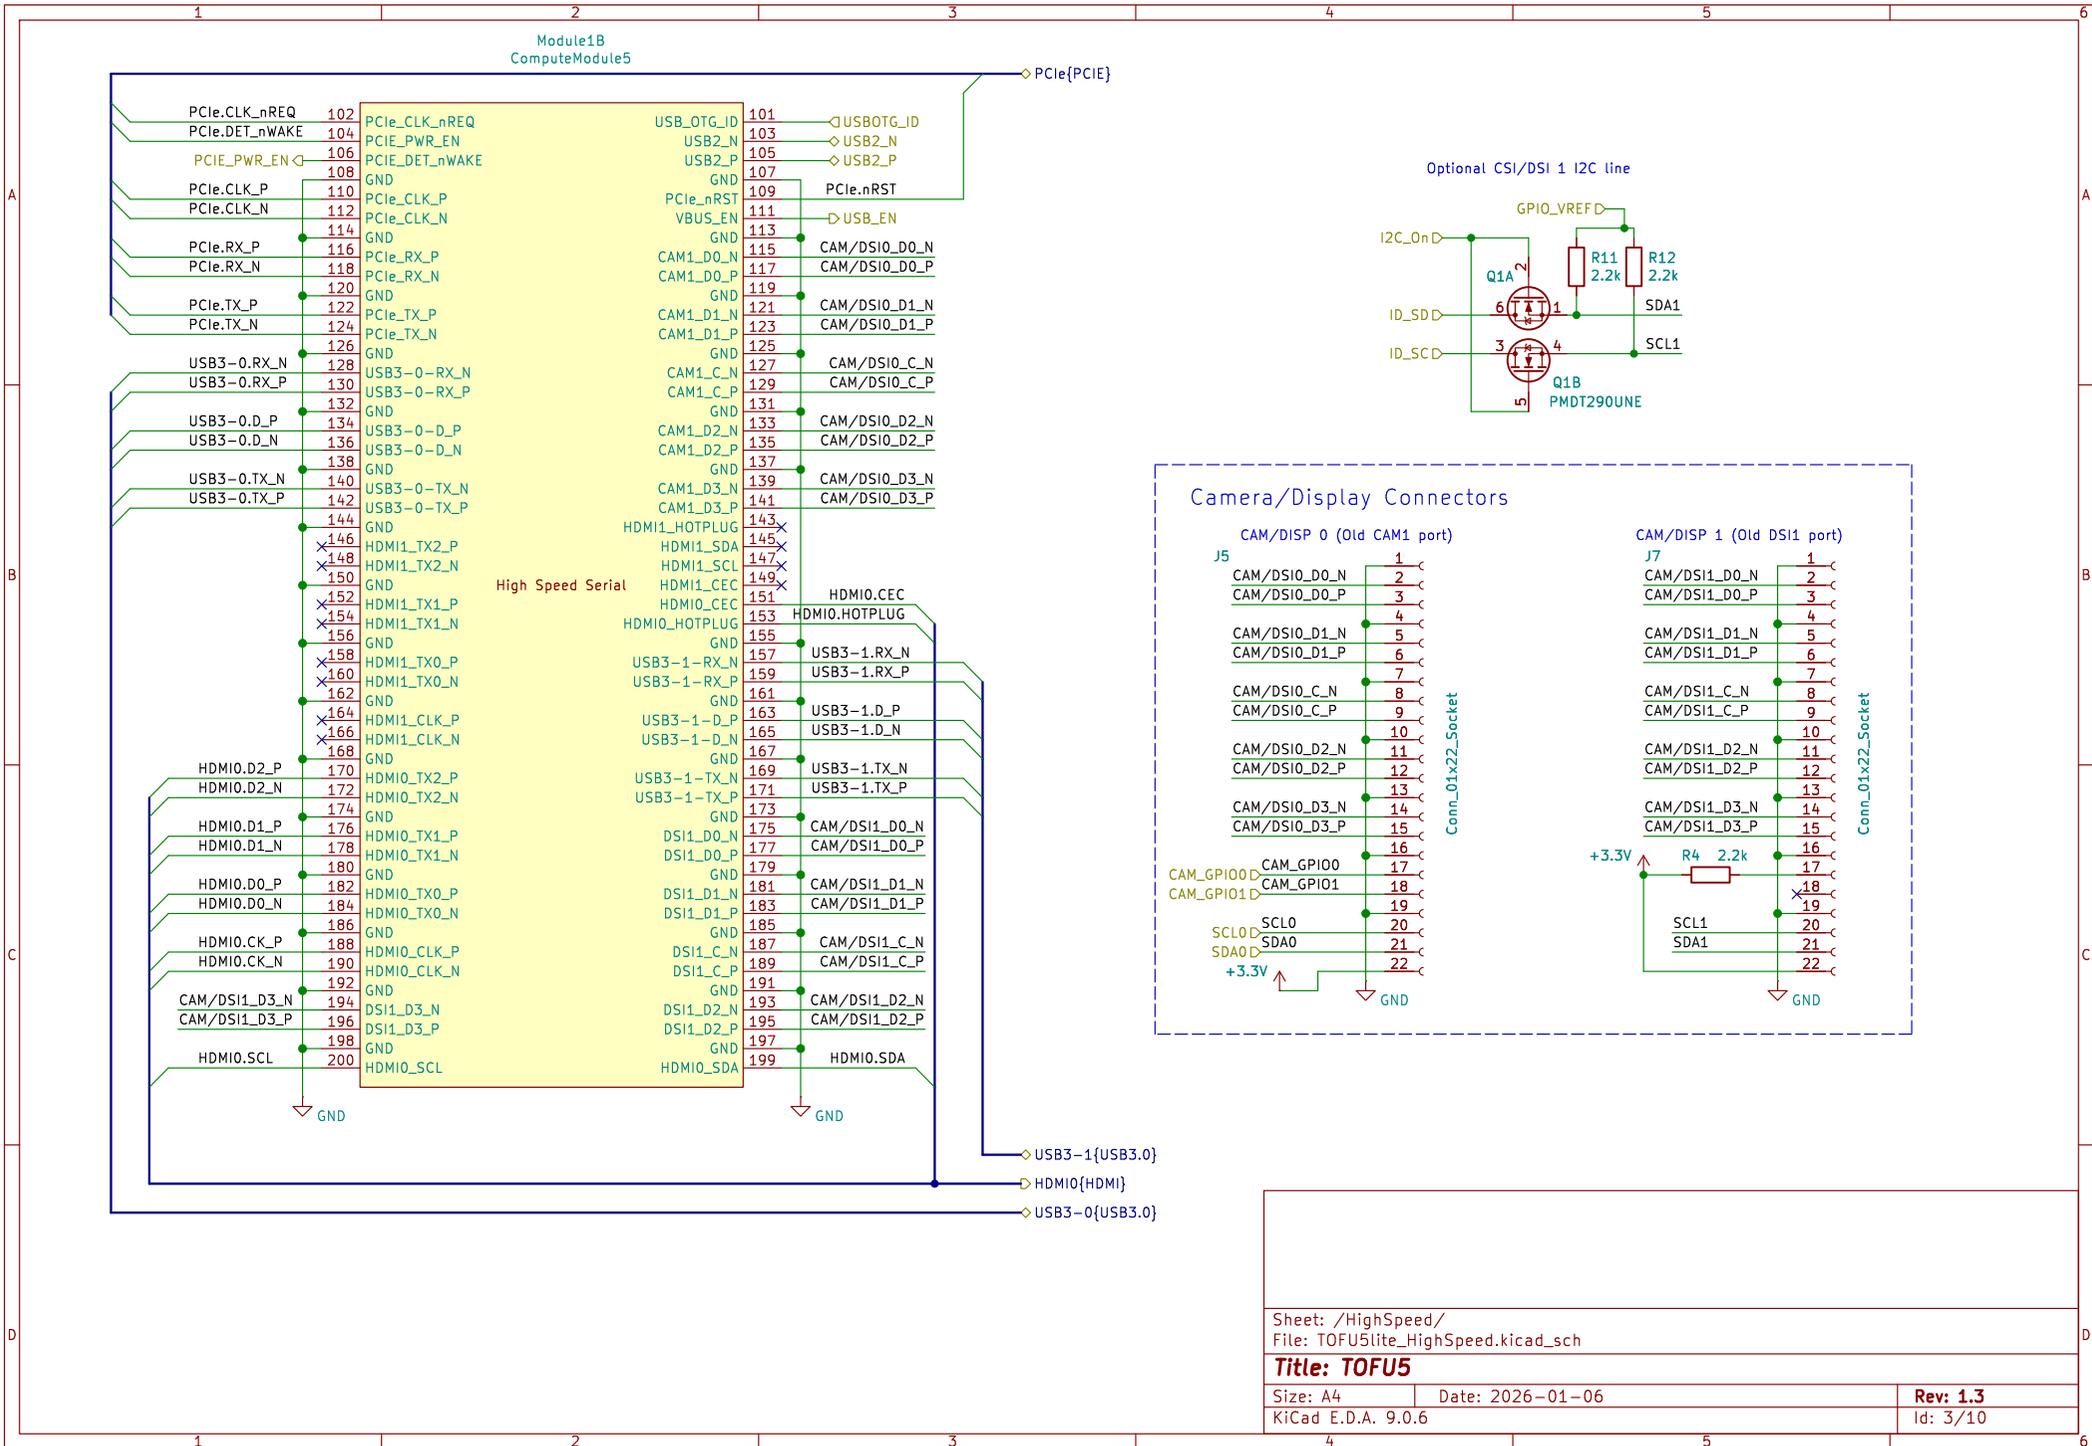


M.2 connector, Key B

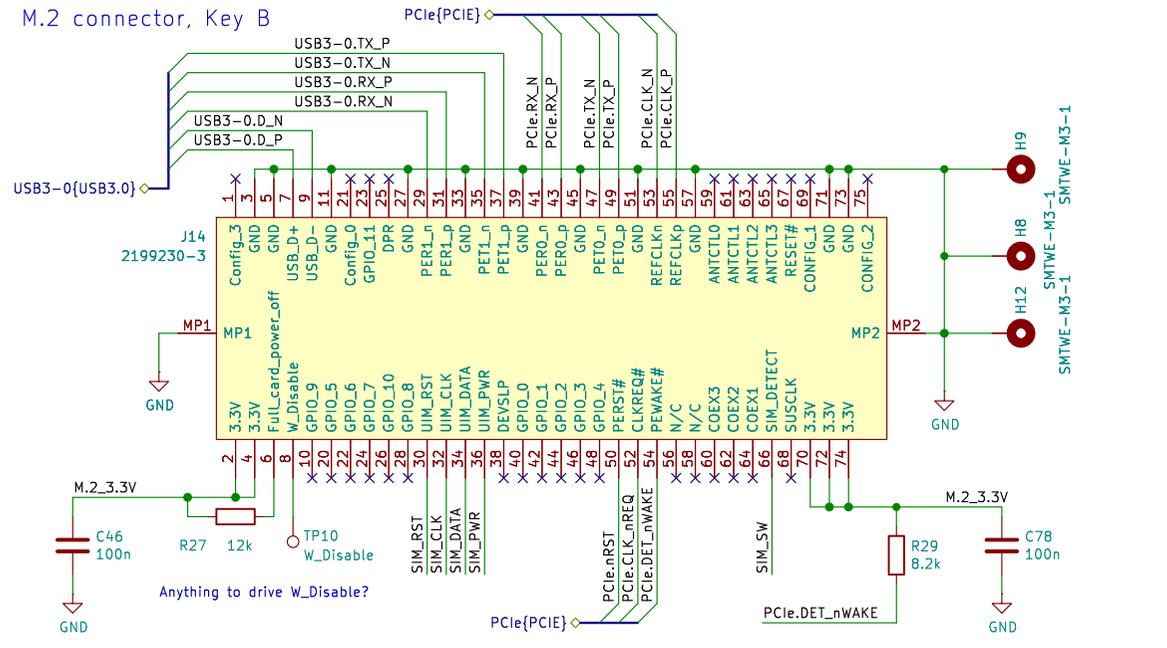

Micro SIM

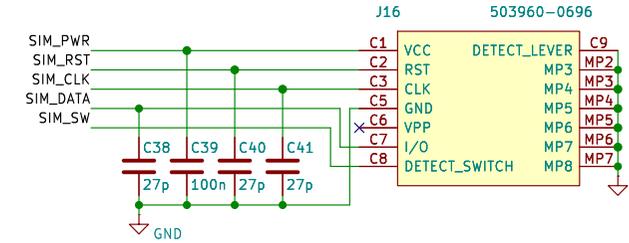

3.3v @ 3.3A PSU for PCIe Only (12v Input)

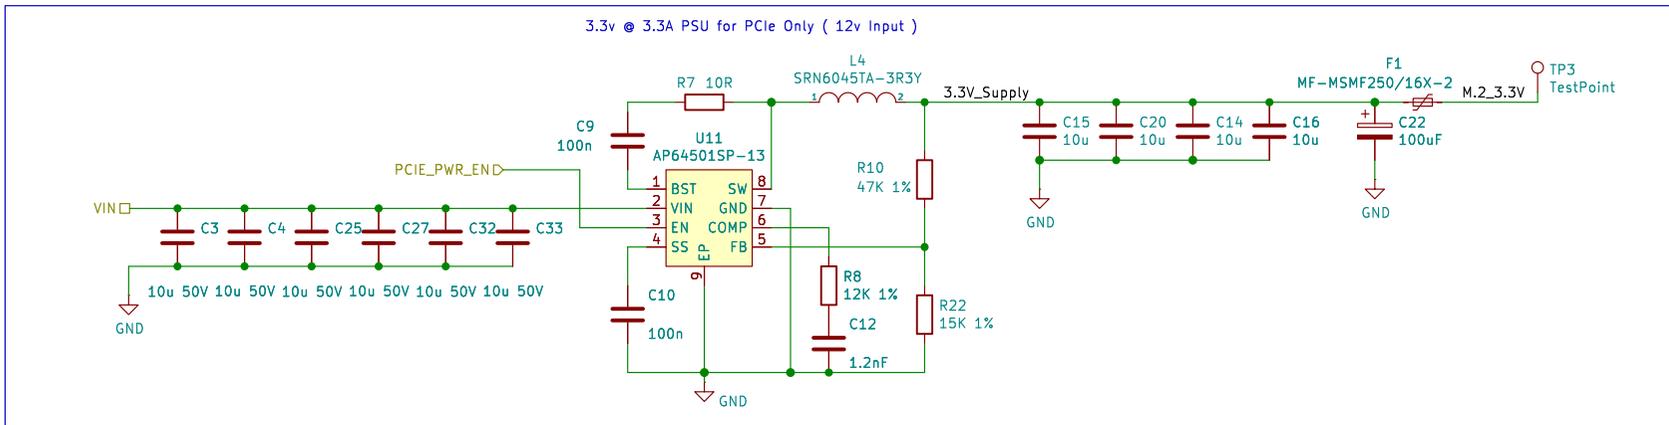

www.oratek.com

Sheet: /M.2_connector/
File: TOFU5lite_M2-connectors.kicad_sch



Title: TOFU5

Size: A4 Date: 2026-01-06

KiCad E.D.A. 9.0.6

Rev: 1.3

Id: 5/10

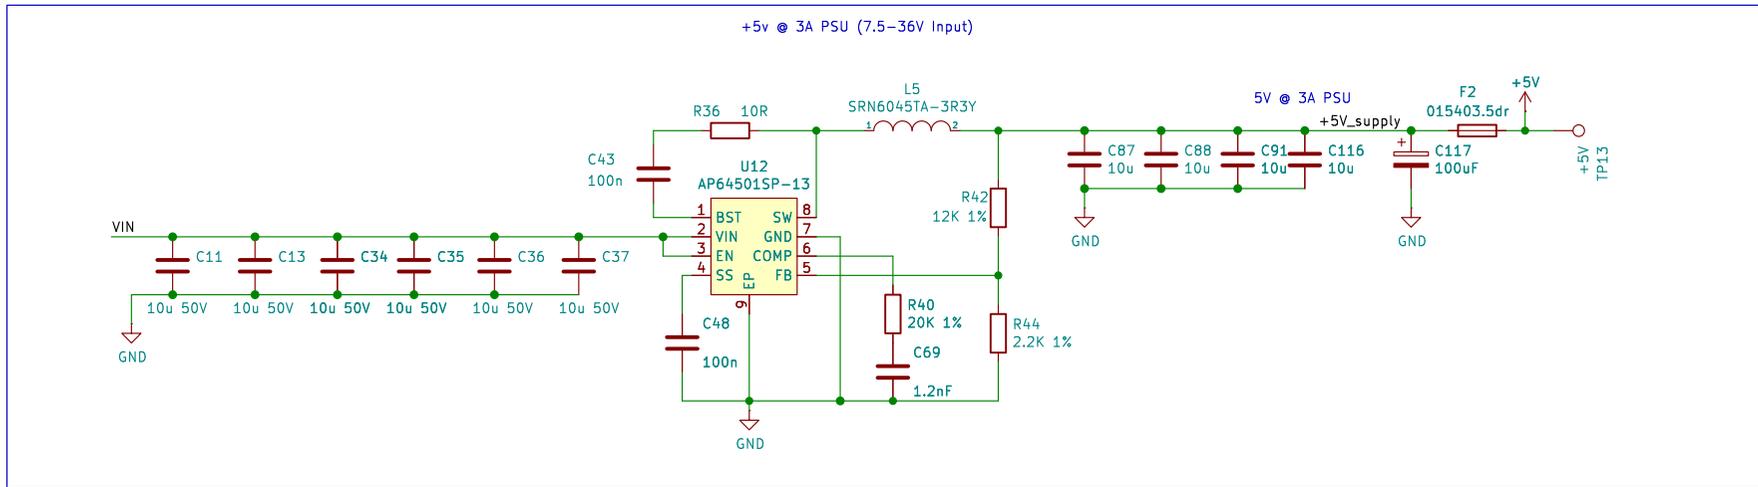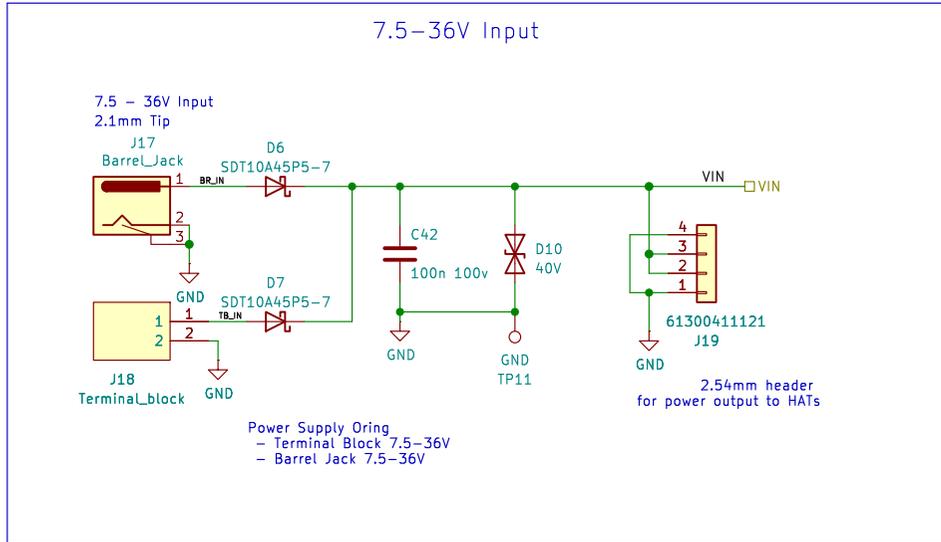

www.oratek.com

Sheet: /PSU/
File: TOFU5lite_PSU.kicad_sch

Title: TOFU5


Size: A4 Date: 2026-01-06

KiCad E.D.A. 9.0.6


Rev: 1.3

Id: 6/10

RTC Battery connector




Fan connector on 5V or VIN

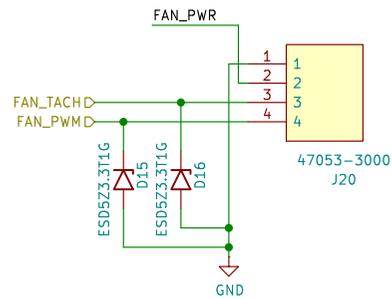

IMPORTANT: Check fan voltage with regards to Vin!


Configuration DIP switch

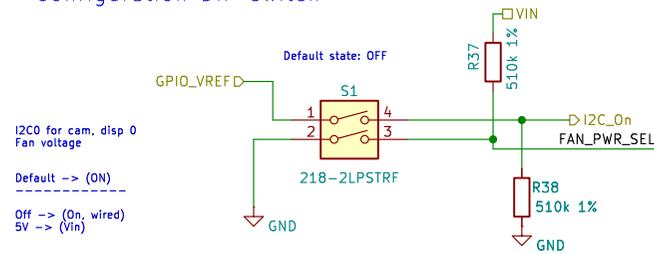

IMPORTANT: Check fan voltage before switching to Vin!

Fan Power Selection

- 5V (Default)
- Vin (Or highest voltage)



www.oratek.com


Sheet: /OnboardDevices/
File: TOFU5lite_OnboardDevices.kicad_sch

Title: TOFU5

Size: A4 Date: 2026-01-06
KiCad E.D.A. 9.0.6

Rev: 1.3
Id: 7/10

USB-C Port

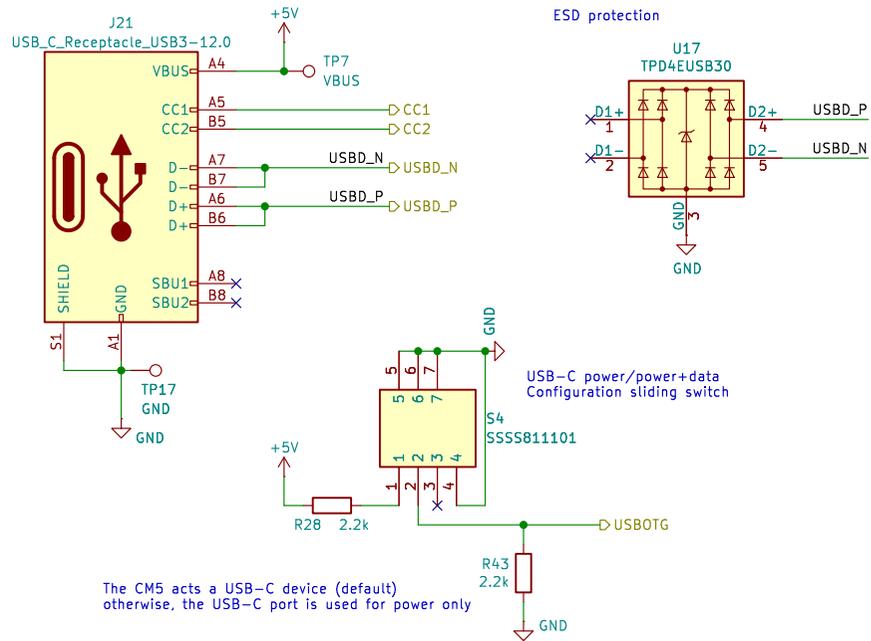

www.oratek.com

Sheet: /USB-C/
File: TOFU5lite_USB-C.kicad_sch


Title: TOFU5


Size: A4 Date: 2026-01-06

KiCad E.D.A. 9.0.6

Rev: 1.3

Id: 8/10

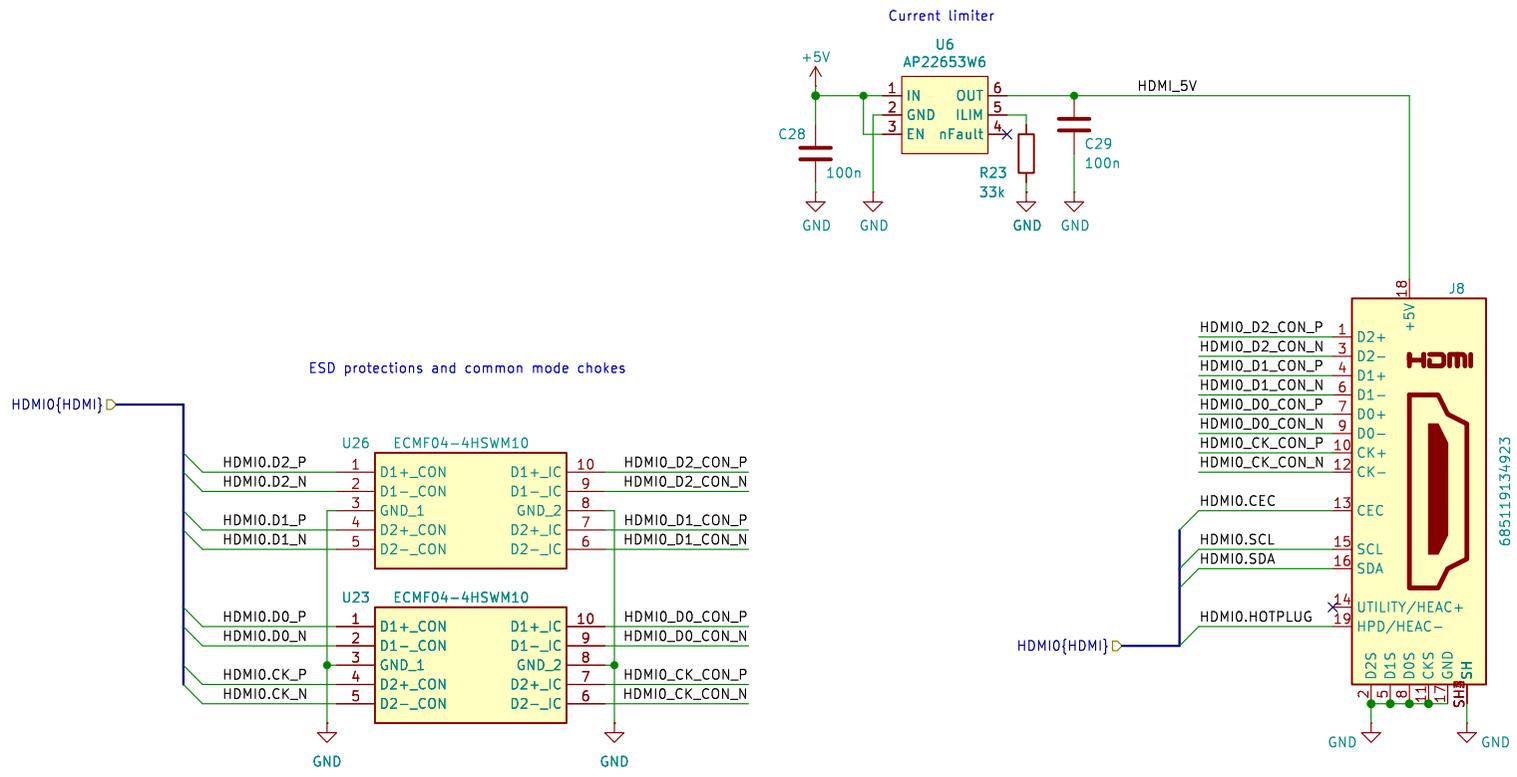

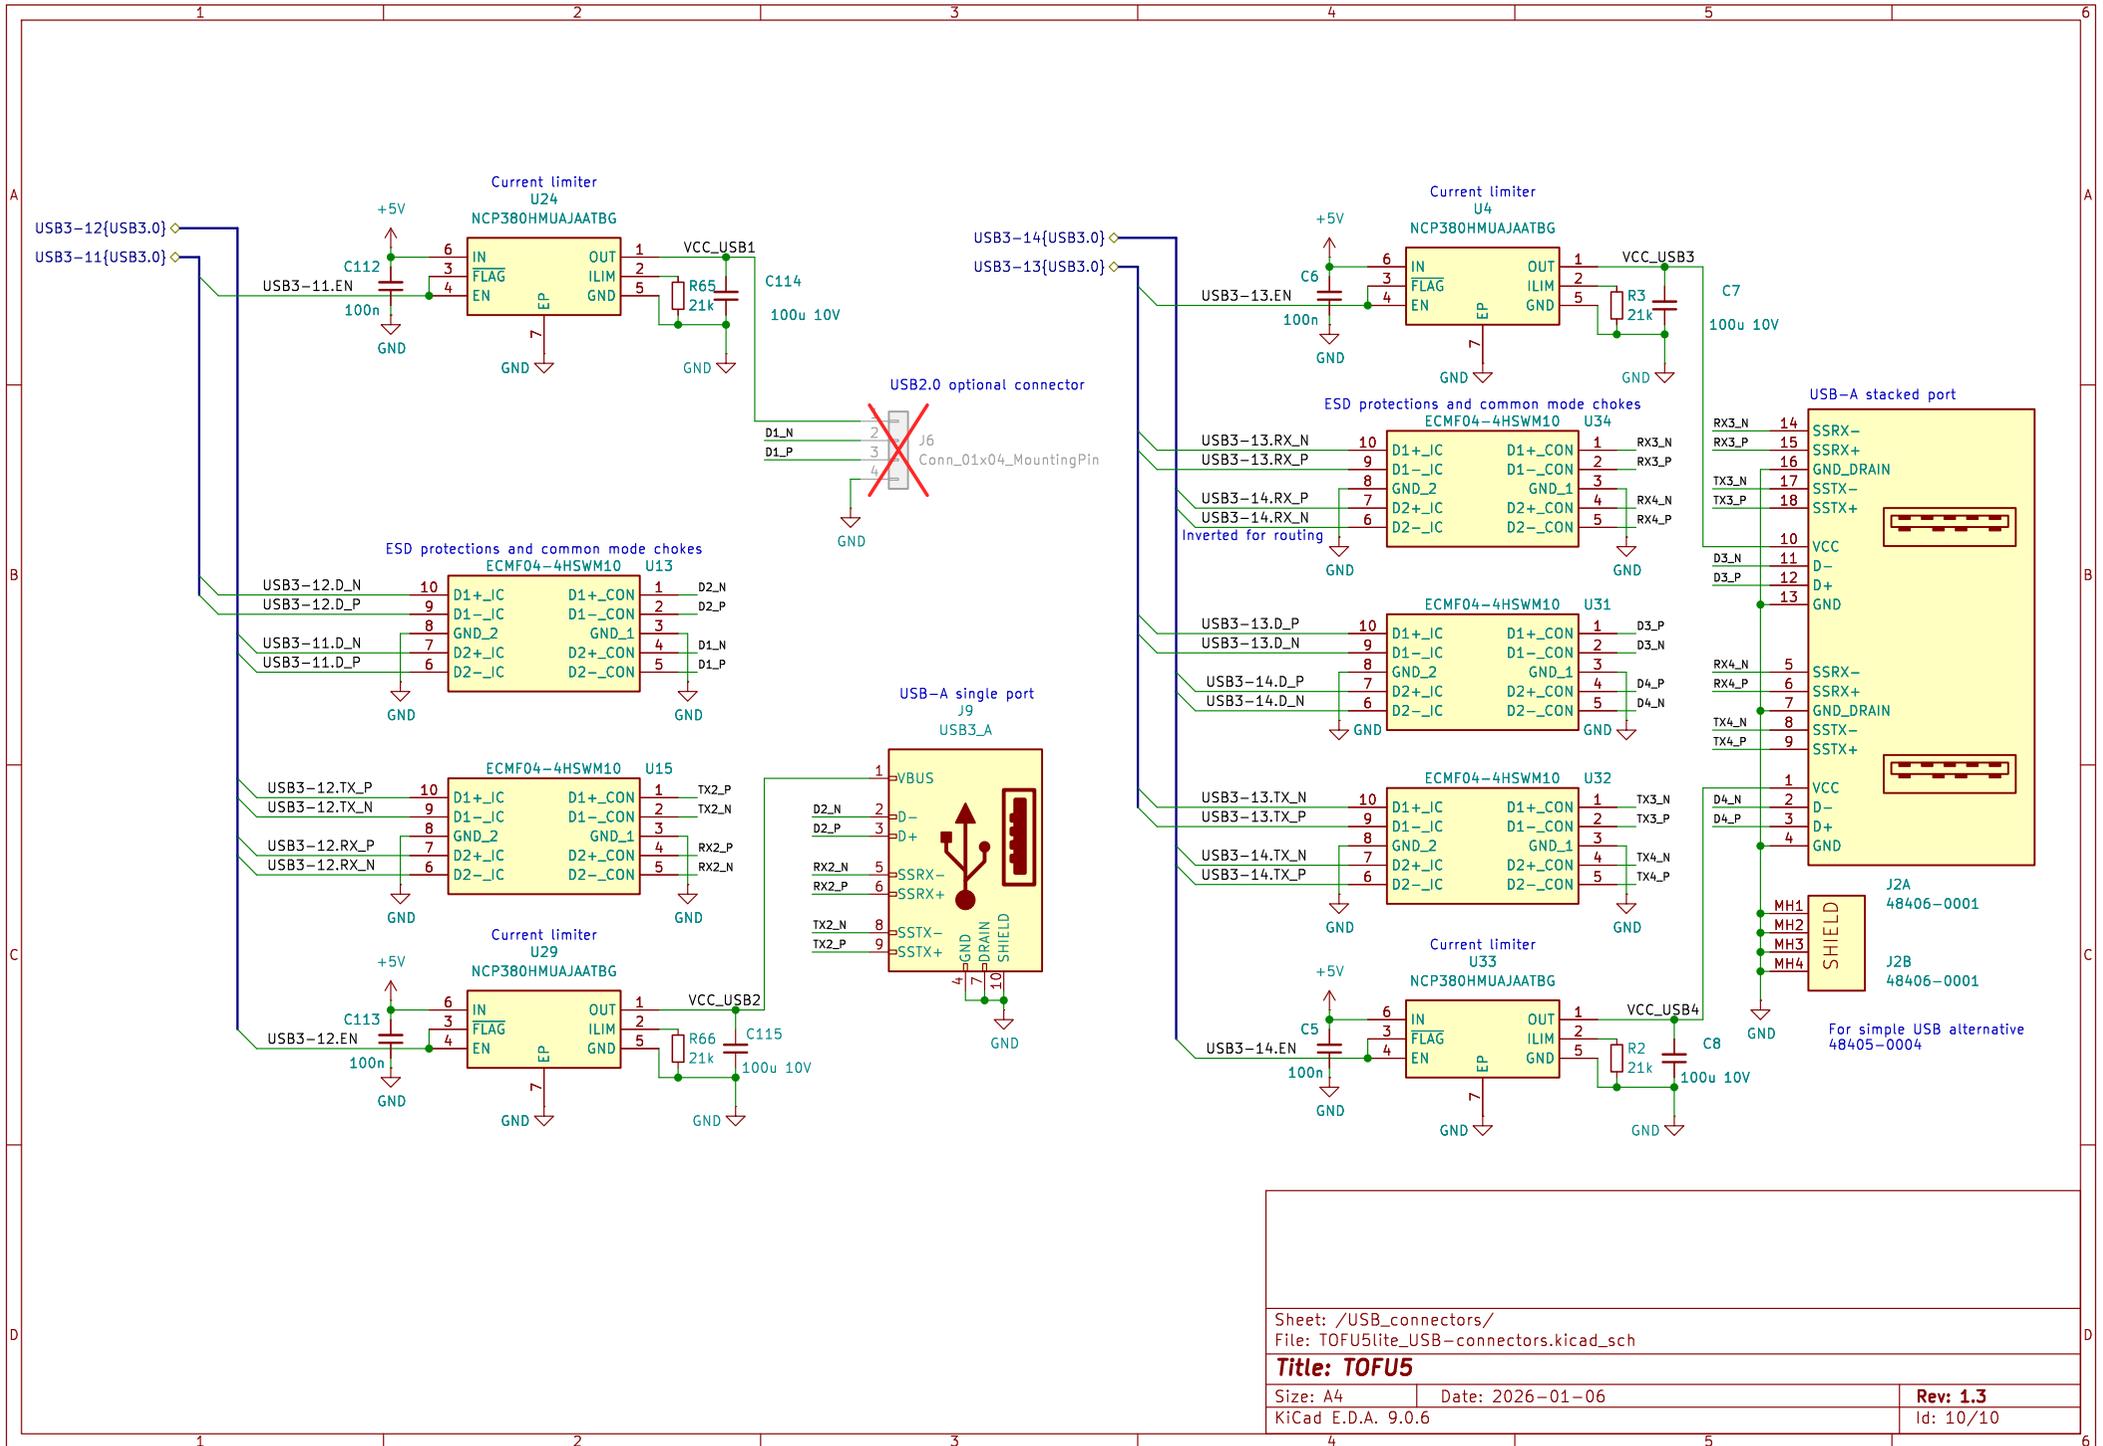

Sheet: /USB_connectors/
 File: TOFU5lite_USB-connectors.kicad_sch

Title: TOFU5

Size: A4 Date: 2026-01-06
 KiCad E.D.A. 9.0.6

Rev: 1.3
 Id: 10/10