

DelPAC® 2500 Storage & Handling

Shipment

DelPAC 2500 may be shipped in fiberglass, rubber lined and 316 stainless steel trucks which conform to D.O.T. Specifications as well as the laws of the states in which they operate. The average shipment is 4,500 gallons or approximately 45,000 pounds. DelPAC 2500 is unloaded through 2 inch reinforced rubber hose using air pressure supplied by the truck's air compressor. The fittings are 2-inch cam & groove quick connect couplers.

Storage & Handling

Tanks for receiving tank truck deliveries should be 1.5 times the delivery amount or a minimum of 6,750 gallons capacity. An easy means of determining the level in the tanks should be available, such as a sight tube or dip stick, so that the tank will not be overfilled during delivery. For optimum product performance, DelPAC 2500 should be consumed within two (2) months of delivery. Storage tanks should be emptied and inspected annually.

Equipment & Piping

STORAGE TANKS

Tanks may be constructed of fiberglass or epoxy lined steel. Polypropylene or polyethylene tanks have also been used.

PIPING

Schedule 80 PVC or polymer lined piping can be used. Glass reinforced plastic or hard rubber are also suitable materials for piping. Due to the high coefficient of expansion for PVC and CPVC, piping made of these materials should not be anchored at both ends of a piping run and must

be adequately supported when installed. Gravity feed when possible. Initial pump cost and maintenance are eliminated. When centrifugal pumps are used they should be sized for head and flow requirements. Wetted pump parts should be of poly lined, plastic or fiberglass. Packing may be of graphite or Teflon. Compatible gasket materials include Teflon, neoprene or rubber. There are several types of valves suitable for handling DelPAC 2500. Their wetted parts should be of Teflon, PVC, Hastelloy C, or rubber lined construction. Feed rates and metering can be accomplished using rotameters, volumetric displacement pumps, weighing devices and mechanical feeders. The wetted parts of these devices should be constructed of Teflon, PVC, Hastelloy C or rubber. Maintenance of the equipment should follow general industry standards and manufacturer's recommendations. Piping and pumps taken out of service for more than thirty days should be thoroughly rinsed with water.

Safety

DelPAC 2500 is a corrosive hazardous material and must be handled with care. DelPAC 2500 is acidic with a pH of 2.1 – 3.5 and is slightly hazy to clear with variable color. It is not volatile or flammable. Precautions should be taken to prevent spraying or splashing. Under normal conditions, DelPAC 2500 will not generate mists or vapors.

- There is a risk of serious damage to eyes. Redness, watering, and itching characterize inflammation of the eye.
- Skin contact may cause burns. Skin exposure is characterized by itching, scaling, reddening or occasionally, blistering.
- Inhalation of the spray mist may cause irritation of the respiratory tract, characterized by coughing.

choking or shortness of breath. Liquid or spray mist may cause tissue damage, particularly on mucous membranes of eyes, mouth and respiratory tract.

DelPAC 2500 may be very slippery if spilled on stairways, walkways or floors and may be a significant slip hazard.


**SUGGESTED FIRST AID FOR CONTACT WITH
DELPAC 2500 IS:**

- Inhalation: Remove from exposure; seek medical treatment if symptoms occur.
- Eye Contact: Immediately flush with water for at least 15 minutes, occasionally lifting upper and lower lids. Seek medical attention immediately.
- Skin Contact: Immediately rinse the affected area with tepid water, removing contaminated clothing. Rinse with water for a minimum of 15 minutes. Seek medical attention if there is any indication of a chemical burn.
- Ingestion: Do not induce vomiting. If conscious, have the victim rinse mouth then drink large amounts of water. Seek medical attention immediately.

Spill Cleanup

Contain major spills to prevent entering water sources and sewers. Very minor spills may be washed to a chemical sewer, neutralized with soda ash to a pH of 5-9 or absorbed with an inert material. Local and state regulations may require reporting of spills of a hazardous material. Spills occurring during the shipment of a hazardous material or during loading/unloading operations may have to be reported to the Department of Transportation (DOT) as specified in 49 CFR §171.16 Detailed hazardous materials incident reports. If a facility plans to respond to a spill of DelPAC 2500, the facility must have an emergency action plan and must train their employees. The requirements for planning and training can be found in 29 CFR §1910.120 Hazardous waste operations and emergency response.

Disposal of any hazardous material must comply with local, state and federal regulations. The proper disposal of DelPAC 2500 spill residuals will be dependent on the circumstances of the spill.

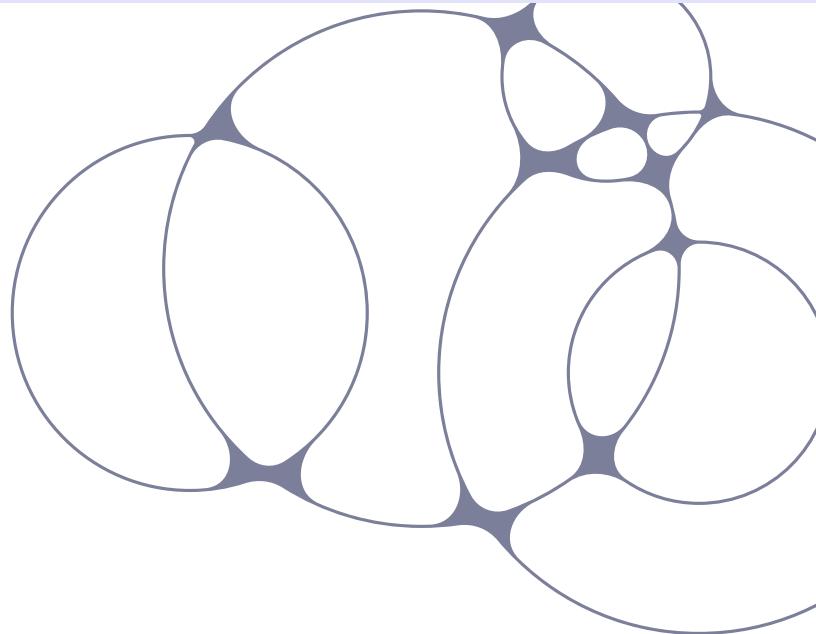

DelPAC 2500 ALUMINUM CHLORIDE HYDROXIDE SULFATE

Specifications	Range
CAS NUMBER	39290-78-3
SPECIFIC GRAVITY	1.2 MIN.
EVAPORATION RATE	SAME AS WATER
FREEZING POINT	-26° F
BOILING POINT	230° F
PH	2.1 - 3.5
SOLUBILITY IN WATER	100%
STABILITY	AVOID TEMPERATURES ABOVE 113° F

The information presented herein is believed to be accurate and reliable, but is given without guaranty or warranty, expressed or implied. The user should not assume that all safety measures are indicated or that other measures may not be required. The user is responsible for assuring that the product and equipment are used in a safe manner that complies with all appropriate legal standards and regulations.