

DelPAC® XG Storage & Handling

Shipment

DelPAC XG may be shipped in fiberglass, rubber lined and 316 stainless steel trucks which conform to D.O.T. Specifications as well as the laws of the states in which they operate. The average shipment is 4,025 gallons or approximately 45,000 pounds. DelPAC XG is unloaded through 2 inch reinforced rubber hose using air pressure supplied by the truck's air compressor. The fittings are 2-inch cam & groove quick connect couplers.

Storage & Handling

Tanks for receiving tank truck deliveries should be 1.5 times the delivery amount or a minimum of 6,750 gallons capacity. An easy means of determining the level in the tanks should be available, such as a sight tube or dip stick, so that the tank will not be overfilled during delivery. For optimum product performance, DelPAC XG should be consumed within three (3) years of delivery. Storage tanks should be emptied and inspected annually.

Equipment & Piping

STORAGE TANKS

Tanks may be constructed of fiberglass or epoxy lined steel. Polypropylene or polyethylene tanks have also been used.

PIPING

Schedule 80 PVC or polymer lined piping can be used. Glass reinforced plastic or hard rubber are also suitable materials for piping. Due to the high coefficient of expansion for PVC and CPVC, piping made of these materials should

not be anchored at both ends of a piping run and must be adequately supported when installed. Gravity feed when possible. When centrifugal pumps are used they should be sized for head and flow requirements. Wetted pump parts should be of polylined, plastic or fiberglass. Packing may be of graphite or Teflon. Compatible gasket materials include Teflon, neoprene or rubber. There are several types of valves suitable for handling DelPAC XG. Their wetted parts should be of Teflon, PVC, Hastelloy C, or rubber lined construction. Feed rates and metering can be accomplished using rotameters, volumetric displacement pumps, weighing devices and mechanical feeders. The wetted parts of these devices should be constructed of Teflon, PVC, Hastelloy C or rubber. Maintenance of the equipment should follow general industry standards and manufacturer's recommendations. Piping and pumps taken out of service for more than thirty days should be thoroughly rinsed with water.

Safety

DelPAC XG must be handled with care. DelPAC XG is mildly acidic with a pH of 2.5 – 3.8 and is slightly hazy to clear with variable color. It is not volatile or flammable. Precautions should be taken to prevent spraying or splashing. Under normal conditions, DelPAC XG will not generate mists or vapors.

- There is a risk of serious damage to eyes. Redness, watering, and itching characterize inflammation of the eye.
- Skin contact may cause burns. Skin exposure is characterized by itching, scaling, reddening or occasionally, blistering.
- Inhalation of the spray mist may cause irritation of

the respiratory tract, characterized by coughing, choking or shortness of breath. Liquid or spray mist may cause tissue damage, particularly on mucous membranes of eyes, mouth and respiratory tract.

DelPAC XG may be very slippery if spilled on stairways, walkways or floors and may be a significant slip hazard.


**SUGGESTED FIRST AID FOR CONTACT WITH
DELPAC 2500 IS:**

- Inhalation: Remove from exposure; seek medical treatment if symptoms occur.
- Eye Contact: Immediately flush with water for at least 15 minutes, occasionally lifting upper and lower lids. Seek medical attention immediately.
- Skin Contact: Immediately rinse the affected area with tepid water, removing contaminated clothing. Rinse with water for a minimum of 15 minutes. Seek medical attention if there is any indication of a chemical burn.
- Ingestion: Do not induce vomiting. If conscious, have the victim rinse mouth then drink large amounts of water. Seek medical attention immediately.

Spill Cleanup

Contain major spills to prevent entering water sources and sewers. Very minor spills may be washed to a chemical sewer, neutralized with soda ash to a pH of 5-9 or absorbed with an inert material.

DelPAC XG is not classified as a hazardous substance under CERCLA (40 CFR 302.4). There is no reportable quantity (RQ).

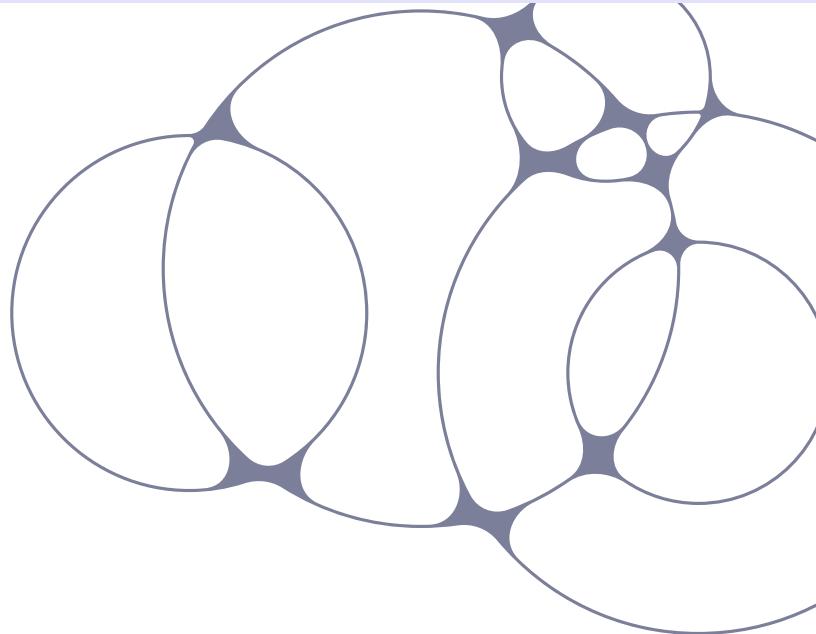

DelPAC XG ALUMINUM CHLOROHYDRATE SOLUTION

Specifications	Range
CAS NUMBER	12042-91-0
SPECIFIC GRAVITY	>1.3
EVAPORATION RATE	SAME AS WATER
FREEZING POINT	<22° F
BOILING POINT	221° F
PH	2.5 - 3.8
SOLUBILITY IN WATER	100%
STABILITY	AVOID TEMPERATURES ABOVE 113° F

The information presented herein is believed to be accurate and reliable, but is given without guaranty or warranty, expressed or implied. The user should not assume that all safety measures are indicated or that other measures may not be required. The user is responsible for assuring that the product and equipment are used in a safe manner that complies with all appropriate legal standards and regulations.