

blue

BLUE ELECTRIC

| Electric Forklifts
2.0T–5.0T Range



Designed for the future of material handling.

Powerful. Efficient. Built for Every Shift.



Make the Switch to **Electric**

Cleaner. Quieter. Built for daily handling.

Blue Electric forklifts

are designed for modern warehouses, distribution centres and material handling environments where cleaner operation, lower noise and reliable daily performance matter.



Zero Emissions at Use

Cleaner indoor operation.



Fast Charging

Keeps operations moving.



Lower Noise

Better for busy work environments.



Smooth Control

Easier daily handling.



Reduced Service Needs

Fewer engine-service requirements.



Warehouse Ready

Built for pallet movement and stock handling.

The Blue Electric Range

One electric platform.
Six capacity options.



Available in capacities from 2.0 to 5.0 tonnes, the Blue Electric range is engineered to meet a wide variety of lifting requirements, operational demands and warehouse applications.

Model	Capacity
Electric 200	2.0 tonnes
Electric 250	2.5 tonnes
Electric 300	3.0 tonnes
Electric 350	3.5 tonnes
Electric 400	4.0 tonnes
Electric 500	5.0 tonnes

Six models. One electric platform.
From light warehouse handling to heavier daily loads.

Complete Machine Protection

Confidence built into every Blue Electric forklift.



Designed to provide greater confidence, minimise downtime and protect your investment over the long term.

Every Blue Electric forklift is backed by a 5-Year / 10,000-Hour Warranty covering the complete machine, including the lithium-ion battery and key operating systems.



Complete Machine Cover

Protection designed to support the whole forklift, not just selected parts.



Lithium Battery Included

The lithium battery is included as part of the complete machine warranty.



Lower Ownership Risk

Long-term warranty support helps reduce uncertainty and protect your investment.



Lithium Battery System

Fast to charge. Efficient. Long-lasting

LI-ION

Lithium Battery

Reliable power for everyday
material handling.



2 Hour
Fast Charging

90%+
Charging Efficiency

Blue Line Technology

Three-side visual warning, included as standard.

The Blue Line safety light projects a highly visible warning pattern onto the floor around the forklift, helping improve awareness of machine movement in busy warehouse and material handling environments.



Why it matters

Designed to improve workplace awareness, reversing visibility and safer movement in shared working zones.



Key Benefits

- Increased workplace awareness
- Enhanced reversing visibility
- Improved visibility in busy areas
- Reduced movement-related risk



Best suited for

Warehouses, distribution centres, loading docks, manufacturing facilities and shared working zones.



Built for Tough Environments

Designed to perform reliably in dust, moisture and demanding working conditions.

Engineered with protected electrical components to help deliver reliable performance in challenging indoor and outdoor conditions.



IP54 Electrical Protection

Protected electrical components help reduce the effects of dust and water exposure for dependable daily operation.



Dust-Resistant Design

Sealed components help minimise dust ingress, supporting dependable performance in demanding environments.



Weather-Ready Performance

Designed to perform reliably in changing weather conditions, including light rain and outdoor applications.



Indoor & Outdoor Capability

Designed for warehouses, loading docks, manufacturing facilities and outdoor work areas.

Optional Technology Upgrades

Advanced add-ons available when purchasing your Blue Electric forklift.

Optional technologies designed to enhance visibility, support operator control and improve workplace awareness in busy material handling environments.



Blue 360° Camera Full-Surround Awareness

Real-time bird's-eye visibility around the forklift to help reduce blind spots in busy work areas.



Key Benefits

- Full-surround visibility
- Reduced blind spots
- Improved operator awareness
- Safer load handling

Best suited for: narrow aisles, loading zones and shared work areas.



Blue Face Intelligent Operator Control


Helps restrict forklift use to authorised operators, supporting safer access control and usage accountability.



Key Benefits

- Authorised operator access
- Contactless recognition
- Usage accountability
- Reduced risk of misuse

Best suited for: shared fleets, multi-shift teams and access-controlled workplaces.

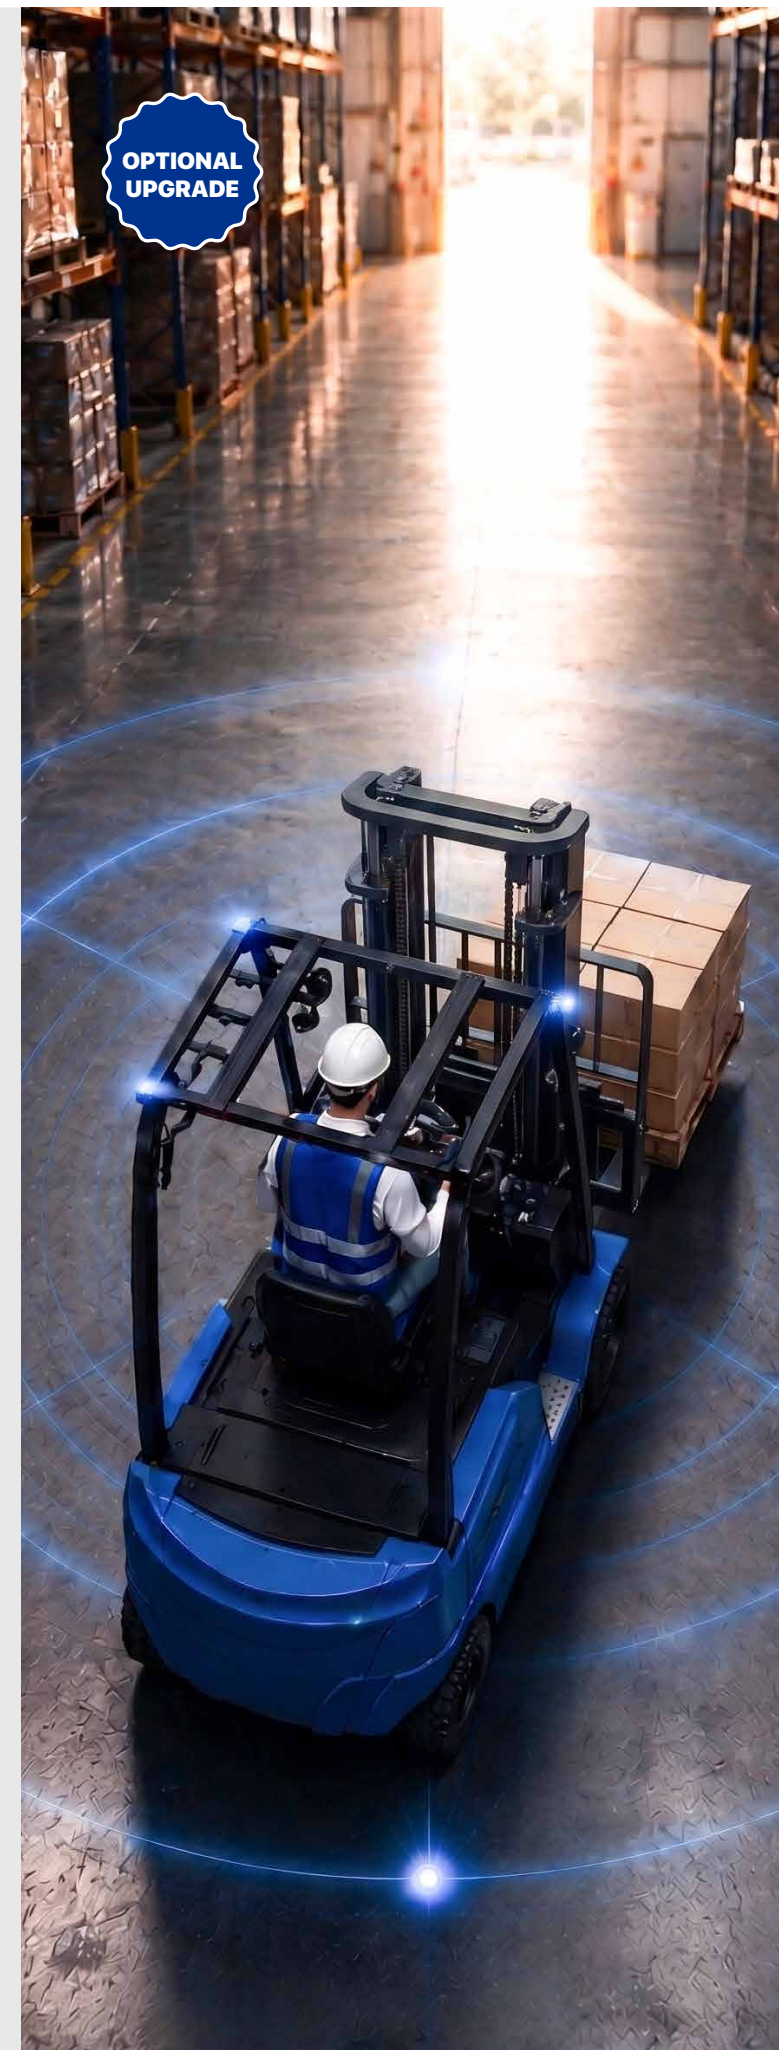

Operator Comfort Seat

Support, safety and control for every shift.

Every Blue Electric forklift is equipped with an ergonomically designed operator seat that enhances comfort, control and confidence throughout long working shifts.



1



3



1 Adjustable Seat Position

Allows the operator to adjust the seating position for better comfort, reach and control.

2



4



2 Suspension Seat

Suspension system absorbs vibration to reduce fatigue and improve operator comfort throughout the shift.

3 Ergonomic Comfort

Comfort-focused seating helps operators stay supported, alert and confident throughout the shift.

4 Operator Presence System (OPS)

The Operator Presence System (OPS) links machine operation to the operator's seated position, helping prevent unintended movement when the seat is unoccupied.

Height & Lift Capacity

Engineered to lift with confidence.

Blue Electric forklifts are engineered to handle a wide range of lifting tasks, from everyday pallet movement to demanding warehouse operations.

Available in capacities from 2.0 to 5.0 tonnes, the Blue Electric range allows businesses to choose the right forklift for their application.

Lift Capacity

2.0–5.0 Tonnes

Standard Lift Height

Up to 4.5 m

Mast Upgrade Available

Upgradable to 7.5 m



Built for Everyday Performance

Essential features
engineered for
productivity, visibility
and everyday reliability.



Wide Visibility Mast

Improves forward visibility of the load, forks and work area for safer, more controlled handling.



Intelligent Start System

Electric lock and card swipe access help prevent unauthorised use and support safer operation.



Wide-Opening Hood

Easier access to battery, motor and hydraulic components for maintenance.

LCD Display • IP54 Electrical Protection • LED Lighting System • Pneumatic Tyres



Ready for the Right Environments

Designed for indoor and outdoor handling,
storage and distribution operations.

blue

Blue Electric forklifts are designed for reliable material handling across busy work environments, supporting daily movement between storage areas, loading zones and operational spaces.

Warehouses

For pallet movement, racking and daily stock handling.

Distribution Centres

For loading, unloading and moving goods across busy logistics spaces.

Manufacturing Facilities

For transporting materials, components and finished goods.

Loading Docks

For handling pallets between storage areas, trucks and dispatch zones.

Rear Detail



Side profile



Front Mast Detail



Operator Area Detail



blue

Designed from Every Angle

A closer look at the Blue Electric forklift.

Each detail highlights the forklift's compact body, operator area, mast structure and practical counterbalance design for everyday material handling.



Blue Electric 200- 500

BASIC TECHNICAL PARAMETERS

Model			BLUE 200	BLUE 250	BLUE 300	BLUE 350	BLUE 400	BLUE 500
Configuration number			\	\	\	\	\	\
Power type			Electric	Electric	Electric	Electric	Electric	Electric
Voltage plateau	v		80	80	80	80	80	80
Operation type			Seat	Seat	Seat	Seat	Seat	Seat

PERFORMANCE

Rated load lifting capacity		kg	2000	2500	3000	3500	4000	5000
Rated load center distance		mm	500	500	500	500	500	500
Front overhang		mm	460	460	475	480	49	49
Rear overhang		mm	415	415	470	470	470	470
Wheelbase	L4	mm	1650	1650	1750	1750	1750	1750
Overweight (with /no battery)		kg	3200/3020	3500/3320	4250/4050	4550/4350	4850/4610	4850/4610
Axle load full load (front/rear)		kg	4730/470	5460/540	6570/680	7220/830	8157/493	8157/493
Axle load no load (front/rear)		kg	1410/1790	1540/1960	1880/2370	1820/2730	2995/1854	2995/1854

DIMENSIONS

Tire type			Pneumatic tire	Pneumatic tire	Pneumatic tire	Pneumatic tire	Pneumatic tire	Pneumatic tire
Number of wheels (x=drive wheels)			2x/2	2x/2	2x/2	2x/2	2x/2	2x/2
Front tire specifications			7.00-12-12PR	28x9 -15-14PR	28x9-15-14PR	28x9-15-14PR	28x9-15-14PR	28x9-15-14PR
Rear tire specifications			6.00-9-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR
Front track width	W1	mm	970	970	1000	1000	1000	1000
Rear track width	W2	mm	960	960	970	970	970	970
Mast tilt angle (front/rear)	a/β	°	6/12	6/12	6/12	6/12	6/12	6/12
Mast retraction height	H1	mm	2005	2005	2070	2125	2125	2125
Free lift height	H5	mm	130	130	135	140	145	145
Max. lift height	H	mm	4500	4500	4500	4500	4500	4500
Max. height during operation	H2	mm	4035	4035	4230	4230	4230	4230
Overall height (overhead guard)	H3	mm	2125	2125	2145	2145	2145	2145
Length (to the vertical plane of the fork)	L	mm	2535	2535	2695	2700	2700	2700
Width	W	mm	1170	1170	1230	1230	1230	1230
Fork size (H*W*L)		mm	1070x122x40	1070x122x40	1070x122x50	1070x122x50	1070x122x50	1070x122x50
Outer distance between forks (min/max)		mm	250-1040	250-1040	250-1085	250-1085	250-1085	250-1085
Mast ground clearance (no load)	H4	mm	110	110	115	115	115	115
Min. ground clearance			115	115	130	130	130	130
Min. turning radius		mm	2335	2335	2500	2500	2500	2500
Max. travelling speed(full load/no load)		km/h	14/15	14/15	15/16	15/16	15/16	15/16
Max. lift speed (full load/no load)		mm/s	330/400	300/400	320/380	300/380	320/370	320/370
Lowering speed (full load/no load)		mm/s	470/450	470/450	450/410	450/410	380/370	380/370
Max.traction		N	15000	15000	16500	16500	23000	23000
Gradeability (full load/no load)		%	18/20	15/20	20/20	15/20	18/25	18/25

Blue Electric 200- 500

blue

OTHER PARAMETERS


Model		BLUE 200	BLUE 250	BLUE 300	BLUE 350	BLUE 400	BLUE 500
Servicing braking (mechanical, electronic,hydraulic)		Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Parking brake (mechanical, electronic,hydraulic)		Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Rated power of traction motor,S2 60 min working system	kW	8AC	8AC	10AC	10AC	12AC	12AC
Rated power of oil pump motor, S3 15% working system	kW	10AC	10AC	16AC	16AC	21AC	21AC
Motor type/protection level		ac asynchronous\IP54	ac asynchronous\IP54	ac asynchronous\IP54	ac asynchronous\IP54	ac asynchronous\IP54	ac asynchronous\IP54

MOTOR AND CONTROLLER

Battery type		Lithium iron phosphate battery	Lithium iron phosphate battery	Lithium iron phosphate battery	Lithium iron phosphate battery	Lithium iron phosphate battery	Lithium iron phosphate battery
Standard battery voltage/capacity	V/Ah	76.8/150	76.8/150	76.8/202	76.8/202	76.8/280	76.8/280
Standard battery weight	kg	180	180	200	200	240	240
Heating form/protection level of battery		Low temperature heating\IP54	Low temperature heating\IP54	Low temperature heating\IP54	Low temperature heating\IP54	Low temperature heating\IP54	Low temperature heating\IP54
MCU motor controller type		MOSFET/AC	MOSFET/AC	MOSFET/AC	MOSFET/AC	MOSFET/AC	MOSFET/AC
MCU motor controller manufacturer		JIACHEN	JIACHEN	JIACHEN	JIACHEN	JIACHEN	JIACHEN
MCU motor controller model	Mpa	ACM III 80C350	ACM III 80C350	ACM III 80C350	ACM III 80C350	ACM III 80C350	ACM III 80C450
Hydraulic system working pressure		18.5	18.5	18.5	18.5	18.5	18.5

*Due to the continuous updating and improvement of products, we reserve the right to change the parameters and design without prior notice. The product configuration and appearance color in the photos may be different from the actual model, please refer to the actual product.

LOAD CURVE

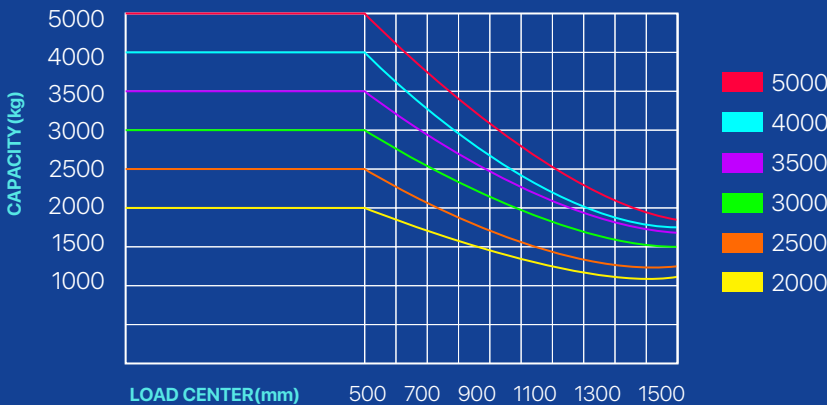

Note: The vertical axis represents the load capacity, and the horizontal axis represents the load center. The load center is calculated from the front of the fork, and the base point of the standard load refers to the center of a cube with a side length of 1000 mm. When the mast is tilted forward, using non-standard forks or loading a load that exceeds the normal width, the load capacity will be reduced. The load curve diagram provides a timely understanding of the load carrying capacity at various load centers.

OPTIONAL CONFIGURATION



- ✓ Forks of other lengths
- ✓ Solid tires
- ✓ Rear work lights
- ✓ Front dual tires
- ✓ Alarm lamp
- ✓ Fire extinguisher
- ✓ Cab
- ✓ Widened or heightened load backrest
- ✓ Front windshield (with wiper)

OPTIONAL WORKING DEVICE

- ✓ Side shifter (x2)
- ✓ Roll Clamp
- ✓ Rotary holding clamp
- ✓ Rotary fork clamp
- ✓ Load stabilizer
- ✓ Fork crown cover
- ✓ Barrel grab
- ✓ Bale Clamp
- ✓ Craton Clamp
- ✓ Fork Positioner(x2)
- ✓ Push-puller
- ✓ Tilting shifter
- ✓ Side-shifter
- ✓ Cargo boom
- ✓ Spinner

Blue electric 200- 500

blue

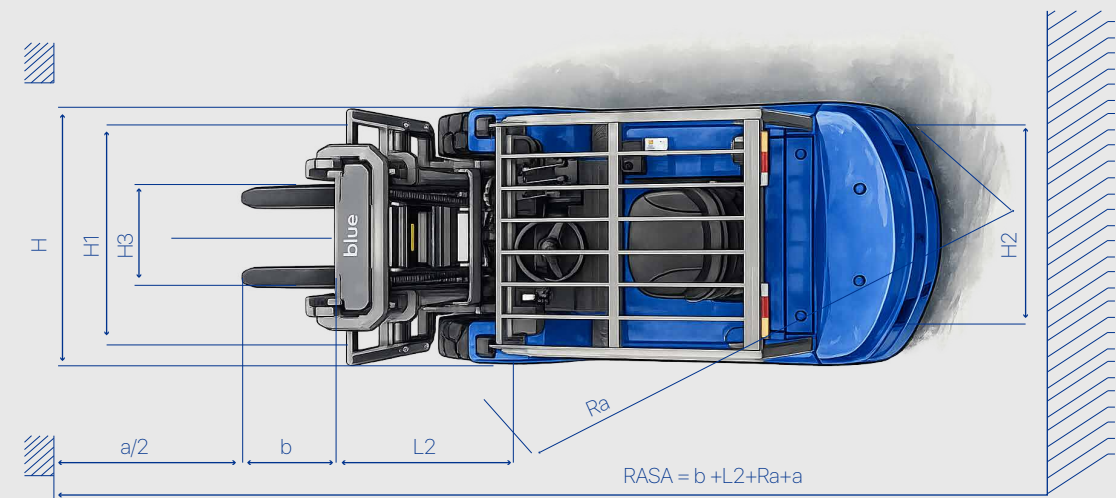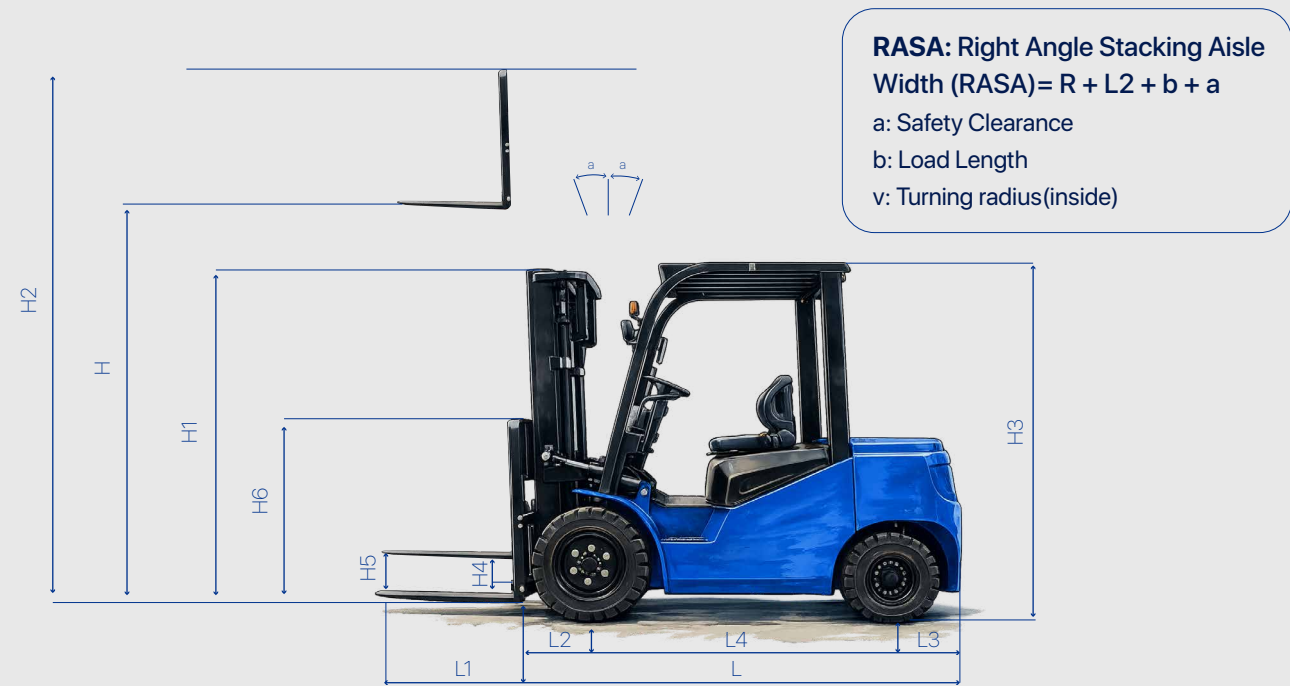

STANDARD CONFIGURATION

- | | | |
|-------------------------------------|---|---|
| ✓ Standard fork | ✓ Traction pin | ✓ Steering indicator |
| ✓ Fork rack | ✓ Oil pump controller | ✓ Central rearview mirror |
| ✓ Integrated combination switch | ✓ LED headlights | ✓ Drive controller |
| ✓ Lifting and tilting control lever | ✓ Steering indicator | ✓ Standard lithium iron phosphate battery |
| ✓ Speed mode selection | ✓ Central rearview mirror | ✓ Rain Canopy |
| ✓ Load backrest | ✓ Drive controller | ✓ Phone Storage Box |
| ✓ Silent gear pump | ✓ Standard lithium iron phosphate battery | ✓ Cup Holder |
| ✓ Multi-function control instrument | ✓ Oil pump controller | ✓ Blue line |
| ✓ Emergency power off switch | ✓ LED headlights | ✓ 3 stage mast (4.5m) |
| ✓ Reversing buzzer | | |

BATTERY CONFIGURATION

Applications	Battery type	Standard	Optional configuration	Optional configuration	Optional configuration	Optional configuration
BMH Series 2-2.5t	Lithium battery(76.8V)	150AH	202AH	280AH	346AH	404AH
BMH Series 3-3.5t	Lithium battery(76.8V)	202AH	280AH	346AH	404AH	460AH
BMH Series 4t	Lithium battery(76.8V)	280AH	346AH	404AH	460AH	\
BMH Series 5t	Lithium battery(76.8V)	280AH	346AH	404AH	460AH	\

SPECIAL OPTIONS FOR MAST

- ✓ 6m Mast
- ✓ Widen fork
- ✓ Extended load-backrest
- ✓ Extended fork
- ✓ Special fork

2.0-5t Wide View

Maximum lifting height	Height of mast																				Free lift height										Mast tilt angle					Rated load							
	The height of mast at lowest position						Mast extension height																																				
							With load-backrest					Without load-backrest					With load-backrest					Without load-backrest					Front/Rear					Load center distance 500mm											
2t	2.5t	3t	3.5t	4t	5t	2t	2.5t	3t	3.5t	4t	5t	2t	2.5t	3t	3.5t	4t	5t	2t	2.5t	3t	3.5t	4t	5t	2t	2.5t	3t	3.5t	4t	5t	2/2.5t	3/3.5t	3t	3.5t	4t	5t	2t	2.5t	3t	3.5t	4t	5t		
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	(°)	(°)	(°)	mm	mm	mm	mm	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)
2000	1495	1495	1570	1625	1625	1625	3005	3005	3185	3185	3185	3185	2695	2695	2725	2725	2725	2725	1495	1495	1570	1625	1625	1625	3005	3005	3185	3185	3185	3185	6/12	6°/12°	6°/12°	2725	2725	2725	2000	2500	3000	3500	3500	3500	3500
2500	1745	1745	1820	1875	1875	1875	3505	3505	3685	3685	3685	3685	3195	3195	3225	3225	3225	3225	1745	1745	1820	1875	1875	1875	3505	3505	3685	3685	3685	3685	6/12	6°/12°	6°/12°	3225	3225	3225	2000	2500	3000	3500	3500	3500	3500
2700	1845	1845	1920	1975	1975	1975	3705	3705	3885	3885	3885	3885	3395	3395	3425	3425	3425	3425	1845	1845	1920	1975	1975	1975	3705	3705	3885	3885	3885	3885	6/12	6°/12°	6°/12°	3425	3425	3425	2000	2500	3000	3500	3500	3500	3500
3000	1995	1995	2070	2125	2125	2125	4005	4005	4185	4185	4185	4185	3695	3695	3725	3725	3725	3725	1995	1995	2070	2125	2125	2125	4005	4005	4185	4185	4185	4185	6/12	6°/12°	6°/12°	3725	3725	3725	2000	2500	3000	3500	3500	3500	3500
3300	2145	2145	2220	2275	2275	2275	4305	4305	4485	4485	4485	4485	3995	3995	4025	4025	4025	4025	2145	2145	2220	2275	2275	2275	4305	4305	4485	4485	4485	4485	6/12	6°/12°	6°/12°	4025	4025	4025	2000	2500	3000	3500	3500	3500	3500
3500	2245	2245	2320	2375	2375	2375	4505	4505	4685	4685	4685	4685	4195	4195	4225	4225	4225	4225	2245	2245	2320	2375	2375	2375	4505	4505	4685	4685	4685	4685	6/12	6°/12°	6°/12°	4225	4225	4225	2000	2500	3000	3500	3500	3500	3500
3600	/	/	2370	2425	2425	2425	/	/	4785	4785	4785	4785	/	/	4325	4325	4325	4325	/	/	2370	2425	2425	2425	/	/	4785	4785	4785	4785	/	6°/12°	6°/12°	4325	4325	4325	/	/	3000	3500	3500	3500	3500
3700	2345	2345	2420	2475	2475	2475	4705	4705	4885	4885	4885	4885	4395	4395	4425	4425	4425	4425	2345	2345	2420	2475	2475	2475	4705	4705	4885	4885	4885	4885	6/12	6°/12°	6°/12°	4425	4425	4425	2000	2500	3000	3500	3500	3500	3500
3800	/	/	2470	2525	2525	2525	/	/	4985	4985	4985	4985	/	/	4525	4525	4525	4525	/	/	2470	2525	2525	2525	/	/	4985	4985	4985	4985	/	6°/12°	6°/12°	4525	4525	4525	/	/	3000	3500	3500	3500	3500
4000	2545	2545	2620	2675	2675	2675	5105	5105	5185	5185	5185	5185	4795	4795	4725	4725	4725	4725	2545	2545	2620	2675	2675	2675	5105	5105	5185	5185	5185	5185	6/12	6°/12°	6°/12°	4725	4725	4725	2000	2500	3000	3200*3500	3200*3500	3200*3500	3200*3500
4250	2670	2670	2745	2800	2800	2800	5355	5355	5435	5435	5435	5435	5045	5045	4975	4975	4975	4975	2670	2670	2745	2800	2800	2800	5355	5355	5435	5435	5435	5435	6/8	6°/8°	6°/8°	4975	4975	4975	1900*2000	2250*2500	2850*3000	3100*3200	3100*3200	3100*3200	3100*3200
4500	2795	2795	2870	2925	2925	2925	5605	5605	5685	5685	5685	5685	5295	5295	5225	5225	5225	5225	2795	2795	2870	2925	2925	2925	5605	5605	5685	5685	5685	5685	6/8	6°/8°	6°/8°	5225	5225	5225	1800*1900	2150*2400	2750*3000	3000*3050	3000*3050	3000*3050	3000*3050
4750	2920	2920	2995	3050	3050	3050	5855	5855	5935	5935	5935	5935	5545	5545	5475	5475	5475	5475	2920	2920	2995	3050	3050	3050	5855	5855	5935	5935	5935	5935	6/8	6°/8°	6°/8°	5475	5475	5475	1700*1800	1900*2300	2600*2950	2800*3000	2800*3000	2800*3000	2800*3000
5000	3045	3045	3120	3175	3175	3175	6105	6105	6185	6185	6185	6185	5795	5795	5725	5725	5725	5725	3045	3045	3120	3175	3175	3175	6105	6105	6185	6185	6185	6185	6/8	6°/8°	6°/8°	5725	5725	5725	1600*1700	1650*2200	2400*2850	2500*2850	2500*2850	2500*2850	2500*2850
5500	3345	3345	3420	3475	3475	3475	6705	6705	6685	6685	6685	6685	6395	6395	6225	6225	6225	6225	3345	3345	3420	3475	3475	3475	6705	6705	6685	6685	6685	6685	6/8	6°/8°	6°/8°	6225	6225	6225	*1600	*1950	*2400	*2500	*2500	*2500	*2500
6000	3595	3595	3670	3725	3725	3725	7205	7205	7185	7185	7185	7185	6895	6895	6725	6725	6725	6725	3595	3595	3670	3725	3725	3725	7205	7205	7185	7185	7185	7185	3/6	3°/6°	3°/6°	6725	6725	6725	*1500	*1800	*2200	*2200	*2200	*2200	*2200

Note: (1)The lifting weight is reduced by 100KG when equipped with built-in side shifter, and 200KG when equipped with external side shifter; (2) be matched with 7.5m and 8m mast.

2.0-5t Full Free 2-Stage Mast

Maximum lifting height	Height of mast																		Free lift height										Mast tilt angle						Rated load								
	The height of mast at lowest position						Mast extension height																																				
							With load-backrest						Without load-backrest						With load-backrest					Without load-backrestt					Front/Rear						Load center distance 500mm								
2t	2.5t	3t	3.5t	4t	5t	2t	2.5t	3t	3.5t	4t	5t	2t	2.5t	3t	3.5t	4t	5t	2t	2.5t	3t	3.5t	4t	5t	2t	2.5t	3t	3.5t	4t	5t	2/2.5t	3/3.5t	3t	3.5t	4t	5t	2t	2.5t	3t	3.5t	4t	5t		
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	(°)	(°)	(°)	(°)	(°)	(°)	(kg)	2.5t	3t	3.5t	4t	5t
2000	1495	1495	1625	1625	1625	1625	3005	3005	3175	3175	3175	3175	2670	2670	2775	2775	2775	2775	530	530	485	490	490	490	865	865	885	890	890	890	6/12	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	2000	2500	3000	3500	4000	5000	
2250	1620	1620	1750	1750	1750	1750	3255	3255	3425	3425	3425	3425	2920	2920	3025	3025	3025	3025	655	655	610	615	615	615	990	990	1010	1015	1015	1015	6/12	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	2000	2500	3000	3500	4000	5000	
2500	1745	1745	1875	1875	1875	1875	3505	3505	3675	3675	3675	3675	3170	3170	3275	3275	3275	3275	780	780	735	740	740	740	1115	1115	1135	1140	1140	1140	6/12	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	2000	2500	3000	3500	4000	5000	
2700	1845	1845	1975	1975	1975	1975	3705	3705	3875	3875	3875	3875	3370	3370	3475	3475	3475	3475	880	880	835	840	840	840	1215	1215	1235	1240	1240	1240	6/12	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	2000	2500	3000	3500	4000	5000	
3000	1995	1995	2125	2125	2125	2125	4005	4005	4175	4175	4175	4175	3670	3670	3775	3775	3775	3775	1030	1030	985	990	990	990	1365	1365	1385	1390	1390	1390	6/12	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	2000	2500	3000	3500	4000	5000	
3300	2145	2145	2275	2275	2275	2275	4310	4310	4475	4475	4475	4475	3975	3975	4075	4075	4075	4075	1180	1180	1135	1140	1140	1140	1515	1515	1535	1540	1540	1540	6/12	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	2000	2500	3000	3500	4000	5000	
3500	2245	2245	2375	2375	2375	2375	4505	4505	4675	4675	4675	4675	4170	4170	4275	4275	4275	4275	1280	1280	1235	1240	1240	1240	1615	1615	1635	1640	1640	1640	6/12	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	2000	2500	3000	3500	4000	5000	
3700	2345	2345	2475	2475	2475	2475	4705	4705	4875	4875	4875	4875	4370	4370	4475	4475	4475	4475	1380	1380	1335	1340	1340	1340	1715	1715	1735	1740	1740	1740	6/12	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	2000	2500	3000	3500	4000	5000	
4000	2545	2545	2675	2675	2675	2675	5005	5005	5175	5175	5175	5175	4670	4670	4775	4775	4775	4775	1580	1580	1535	1540	1540	1540	1915	1915	1935	1940	1940	1940	6/12	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	2000	2500	3000	3200*3500	4000	5000	

