


**** IMPORTANT ****
Top Head Plate
Hole Always
Required.


**** IMPORTANT ****
IF GROUND ISN'T LEVEL, LOWER SIDE TO HAVE
DIFFERENCE ADDED TO FIXING CENTERS

STANDARD FIXING DETAILS


Bolt Through Steel

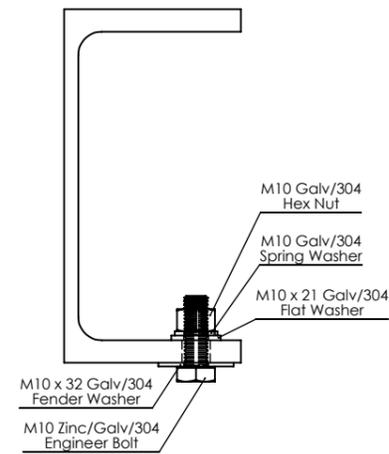


Tapped Steel

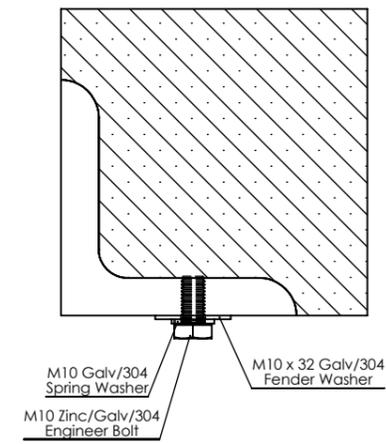




Polypanel

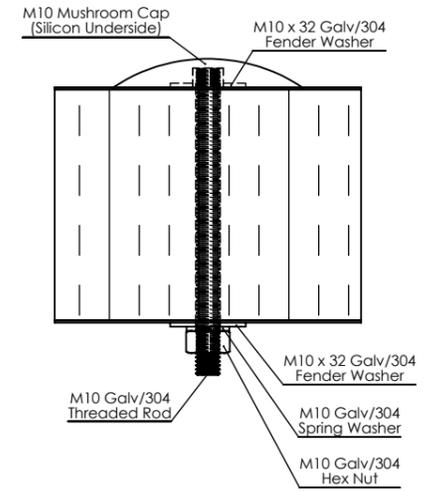

Timber

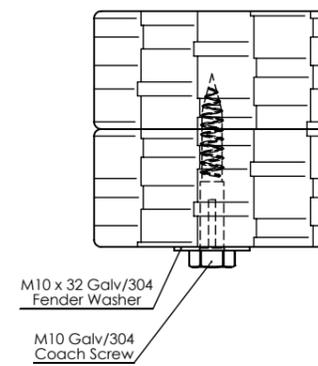

Concrete

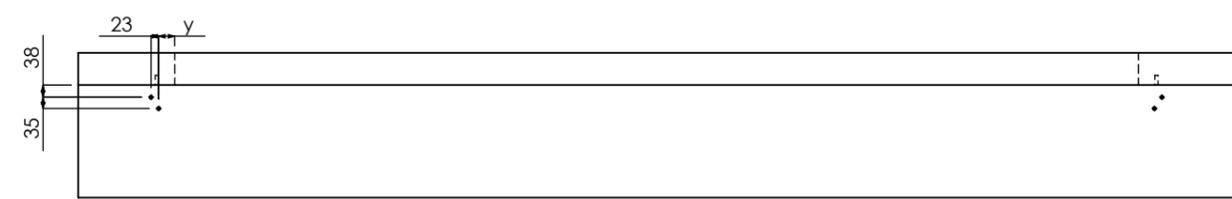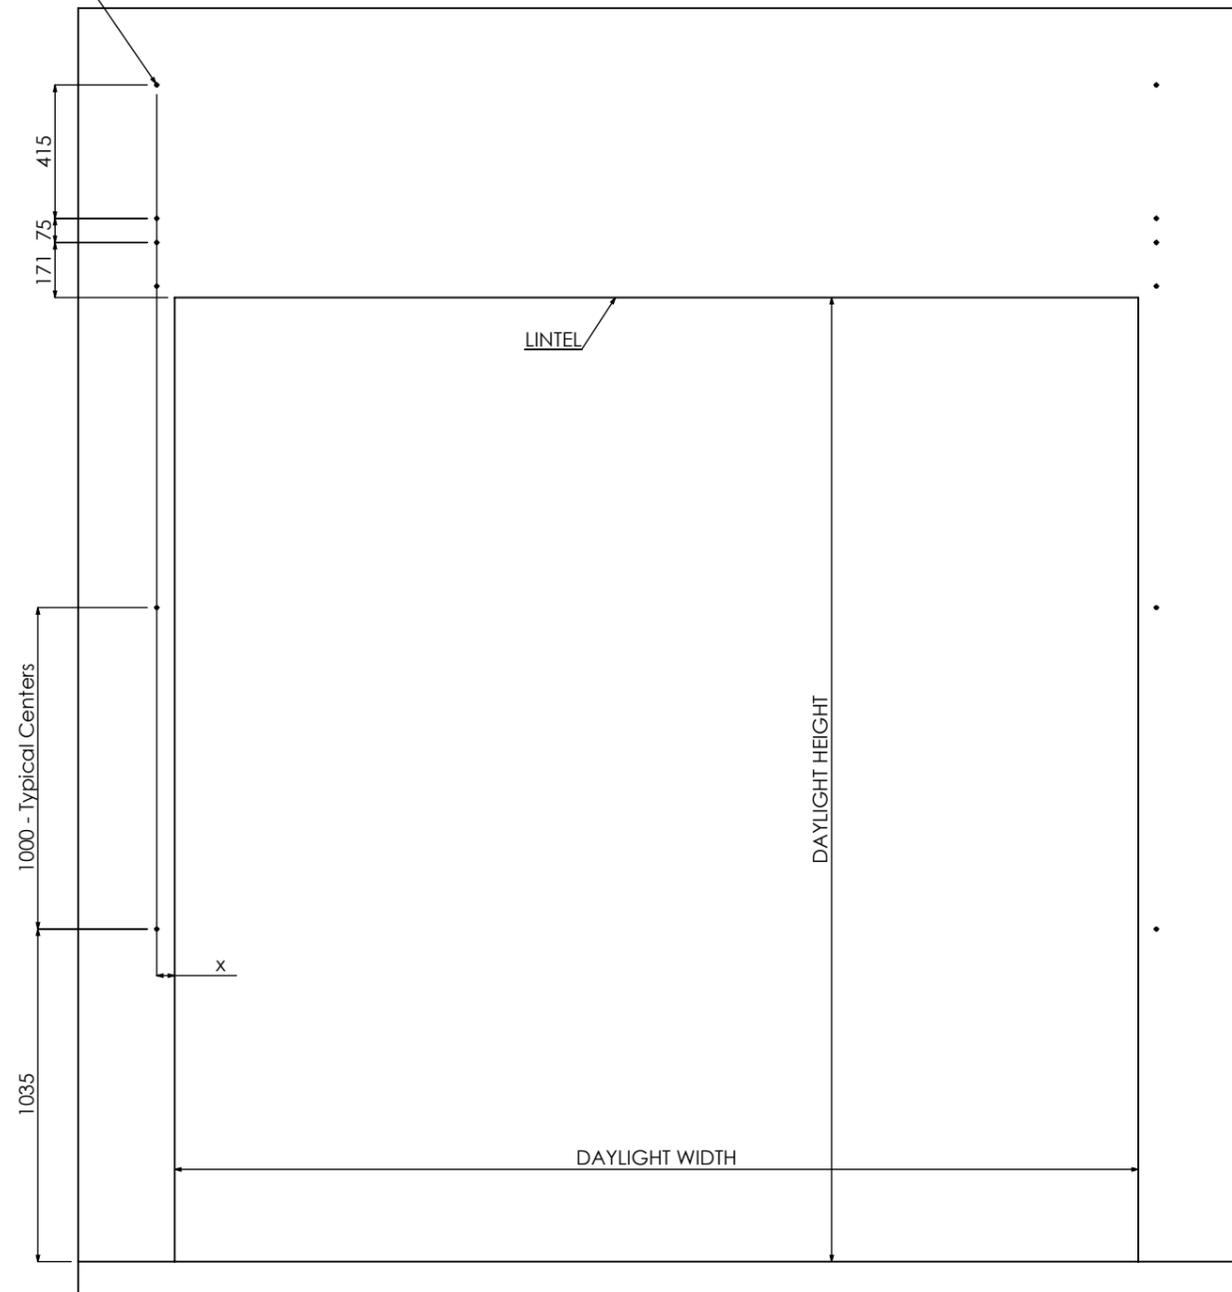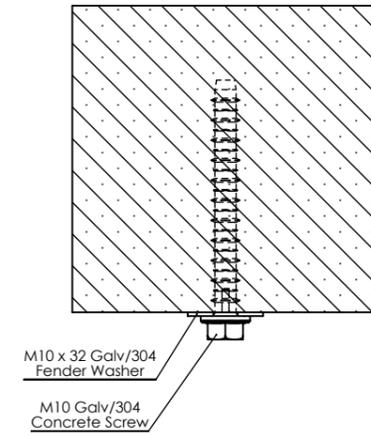

Clearance Variables		
Variable	Dimension	Condition
x	56	Standard
	131	75mm Guides Flush
	181	125mm Guides Flush
y	50	Standard
	125	75mm Guides Flush
	175	125mm Guides Flush

NOTES:
- Dimensions Assume Openings Are Square & Level
- Dimensions Are The Same For Both Sides Of Opening

		General Tolerances		Scale: 1:22	Current Revision: a	Surface Treatment:
		Steel Folds - ±1° Steel Cuts - ±0.3mm		Weight: N/A		N/A
Copyright Only By Auto Mossa Equipment Ltd				Material: N/A		
		Timber Cuts - ±1mm		Model/Project: Hyperglide EX		
		Page: A3	Drawn By: JWIL	Date: 20.08.18	Description:	
Rev		Changes Made	Rev Date	Name	Fixing Layout - Hyperglide EX	
					Drawing No: 8001N006	
					SHEET 1 OF 1	