



**NSP-3**



## ***MULTI-MODE, MULTI-DOMAIN SAR/MTI RADAR***

Gather actionable intelligence using a high performance, airborne radar in all weather, day or night, for ground and maritime environments.





IDS.NSP3.20260127

# NSP-3

Designed to fly on Group 2-3 uncrewed airborne platforms and manned aircraft. Custom installations available.



## CAPABILITIES

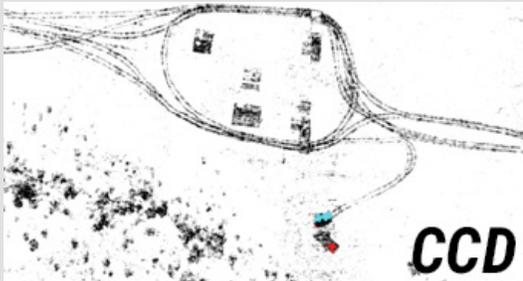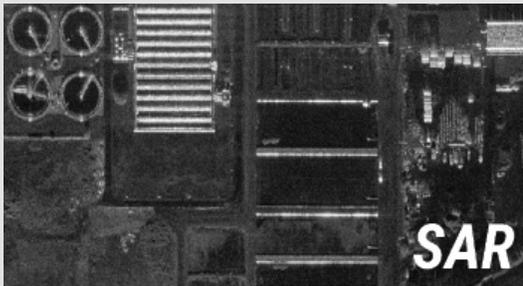

## SYSTEM SPECIFICATIONS

SIZE (MODSAR CONFIGURATION)	<b>MODSAR RADAR ELECTRONICS ASSEMBLY: 2U MOD PAYLOAD</b> LENGTH: 6.6 IN (16.8 CM) WIDTH: 4.3 IN (10.9 CM) HEIGHT: 3.1 IN (7.7 CM)	<b>ANTENNA POD:</b> DIAMETER: 3.75 IN (9.5 CM) LENGTH: 26.5 IN (67.3 CM)
WEIGHT (MODSAR CONFIGURATION)	5.9 LBS (2.7 KG) (WITH A 30" CABLE SET)	
POWER	<74 W, 28 VDC	
FREQUENCY	KU	
TARGET PLATFORMS	GROUP 2-3 UAS	
RECOMMENDED MAINTENANCE INTERVAL	~1,250 HRS	
SENSOR CUEING	CURSOR ON TARGET	
COMMUNICATION	ETHERNET	
SERVER	GROUND PROCESSING SERVER REQUIRED (SIZE AND WEIGHT NOT INCLUDED IN SPECIFICATIONS ABOVE)	
COMMAND & CONTROL	LISA 3D™ AND RADAR CONTROL API	
IMAGE EXPLOITATION	LISA 3D™ OR EXISTING PED EQUIPMENT	
STANDARD DATA PRODUCTS	KML, COMPLEX NITF, JPG, PNG, BMP, STANAG 4607, STANAG 4676	
TRL	9	

## PERFORMANCE DATA

SAR IMAGING	RESOLUTION	0.1 M	1 M
	MAX RANGE	3 KM	13 KM
MOVING TARGET INDICATOR VEHICLE	DETECTION AND TRACKING (GMTI)		6.5 KM
MARITIME SURVEILLANCE	DETECTION AND GEOLOCATION (SAR)		77 NM (143 KM)
	DETECTION AND TRACKING (MMTI)		42 NM (78 KM)
	CLASSIFICATION (ISAR)		37 NM (69 KM)
	MMTI MAX COVERAGE AT 50 KTAS		2,050 NM <sup>2</sup> /HR (7,030 KM <sup>2</sup> /HR)

## CAPABILITIES

IMAGING	SAR
OPERATING MODES	STRIPMAP, SPOTLIGHT, WIDE AREA
CHANGE DETECTION	NON-COHERENT (MCD)
	COHERENT (CCD)
MOVING TARGET INDICATOR	VEHICLE & DISMOUNT TRACKING
MARITIME SURVEILLANCE	TRACKING, ISAR, SECTOR SCAN
RESOLUTION (METERS)	0.1, 0.3, 0.5, 1, 2, 5, 10

## APPLICATIONS

- Specialized ISR Missions
- Counter-Narcotics
- Search & Rescue
- Wildland Fire Monitoring
- Pipeline Monitoring
- Illegal Migrant Operations
- Coastal Mapping
- Sea Ice Detection & Monitoring
- And More!
- Railroad Monitoring



P. 801.798.8440  
F. 801.798.2814

E. SALES@IMSAR.COM  
W. WWW.IMSAR.COM

A. 940 S 2000 W #140  
SPRINGVILLE, UT 84663