

Slim

Planstone



Height 25 to 28 mm



265x64 mm waste with trap included
(water flow rate at 15 mm: 60 L/m)



Stone texture



Cutting, angle cutting or trimming available



Colour-matched lacquered cover



Straight cut available



Floor-mounted or flush installation

Material **Planstone**

Planstone is a composite material that combines the aesthetics of natural stone with high technical performance. It is made from a blend of mineral fillers and high-purity resins, resulting in a solid, homogeneous and highly resistant structure.



Mineral composite with polyester resin



Certified anti-slip finish



Non-porous and homogeneous material



Sanitary antibacterial gel coat (ISO NPG)



100% waterproof, no waterproofing membrane required

Standard Colours

Note: The colour of the lacquered cover may vary slightly



(10) White

(23) Sand

(22) Grey


(26) Anthracite

(30) Black

Cover finish



Stainless steel or other RAL colours (available on request, subject to confirmation).

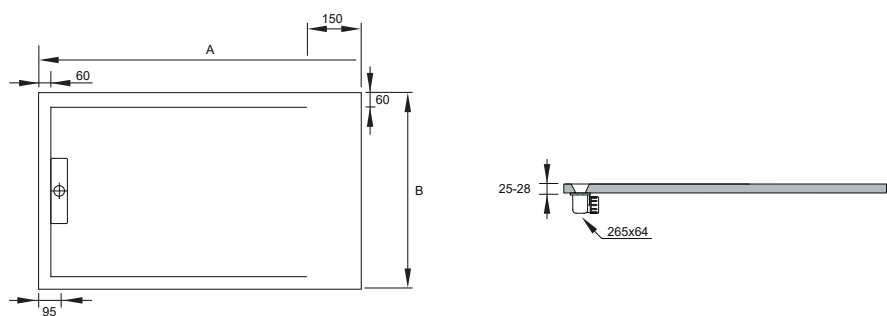

DIMENSIONS AXB (mm)	REFERENCE	NET WEIGHT	VOLUME
800x700	166115 XX 8070	24,8 kg	830x725x40
800x800	166111 XX 8080	28,3 kg	830x825x40
900x700	166115 XX 9070	27,8 kg	930x725x40
900x750	166115 XX 9075	29,7 kg	930x775x40
900x800	166115 XX 9080	31,7 kg	930x825x40
900x900	166111 XX 9090	35,6 kg	930x925x40
1000x700	166115 XX 10070	30,7 kg	1030x725x40
1000x750	166115 XX 10075	32,8 kg	1030x775x40
1000x800	166115 XX 10080	35 kg	1030x825x40
1000x900	166115 XX 10090	39,3 kg	1030x925x40
1000x1000	166111 XX 100100	43,7 kg	1030x1025x40
1100x700	166115 XX 11070	33,7 kg	1130x725x40
1100x750	166115 XX 11075	36 kg	1130x775x40
1100x800	166115 XX 11080	38,4 kg	1130x825x40
1100x900	166115 XX 11090	43,1 kg	1130x925x40
1100x1000	166115 XX 110100	47,9 kg	1130x1025x40
1200x700	166115 XX 12070	36,6 kg	1230x725x40
1200x750	166115 XX 12075	39,2 kg	1230x775x40
1200x800	166115 XX 12080	41,7 kg	1230x825x40
1200x900	166115 XX 12090	46,9 kg	1230x925x40
1200x1000	166115 XX 120100	52,1 kg	1230x1025x40
1300x700	166115 XX 13070	39,6 kg	1330x725x40
1300x750	166115 XX 13075	42,3 kg	1330x775x40
1300x800	166115 XX 13080	45,1 kg	1330x825x40
1300x900	166115 XX 13090	50,6 kg	1330x925x40
1300x1000	166115 XX 130100	56,2 kg	1330x1025x40
1400x700	166115 XX 14070	42,5 kg	1430x725x40
1400x750	166115 XX 14075	45,5 kg	1430x775x40
1400x800	166115 XX 14080	48,4 kg	1430x825x40
1400x900	166115 XX 14090	54,4 kg	1430x925x40
1400x1000	166115 XX 140100	60,4 kg	1430x1025x40
1500x700	166115 XX 15070	45,5 kg	1530x725x40
1500x750	166115 XX 15075	48,6 kg	1530x775x40
1500x800	166115 XX 15080	51,8 kg	1530x825x40
1500x900	166115 XX 15090	58,1 kg	1530x925x40
1500x1000	166115 XX 150100	64,6 kg	1530x1025x40

DIMENSIONS AXB (mm)	REFERENCE	NET WEIGHT	VOLUME
1600x700	166115 XX 16070	48,4 kg	1630x725x40
1600x750	166115 XX 16075	51,8 kg	1630x775x40
1600x800	166115 XX 16080	55,1 kg	1630x825x40
1600x900	166115 XX 16090	61,9 kg	1630x925x40
1600x1000	166115 XX 160100	68,7 kg	1630x1025x40
1700x700	166115 XX 17070	51,4 kg	1730x725x40
1700x750	166115 XX 17075	54,9 kg	1730x775x40
1700x800	166115 XX 17080	58,5 kg	1730x825x40
1700x900	166115 XX 17090	65,6 kg	1730x925x40
1700x1000	166115 XX 170100	72,9 kg	1730x1025x40
1800x700	166115 XX 18070	54,4 kg	1830x725x40
1800x750	166115 XX 18075	58,1 kg	1830x775x40
1800x800	166115 XX 18080	61,8 kg	1830x825x40
1800x900	166115 XX 18090	69,4 kg	1830x925x40
1800x1000	166115 XX 180100	77,1 kg	1830x1025x40
1900x700	166115 XX 19070	57,3 kg	1930x725x40
1900x750	166115 XX 19075	61,2 kg	1930x775x40
1900x800	166115 XX 19080	65,4 kg	1930x825x40
1900x900	166115 XX 19090	73,2 kg	1930x925x40
1900x1000	166115 XX 190100	82,1 kg	1930x1025x40
2000x700	166115 XX 20070	60,3 kg	2030x725x40
2000x750	166115 XX 20075	64,4 kg	2030x775x40
2000x800	166115 XX 20080	68,5 kg	2030x825x40
2000x900	166115 XX 20090	76,9 kg	2030x925x40
2000x1000	166115 XX 200100	85,4 kg	2030x1025x40
2100x700	166115 XX 21070	63,2 kg	2130x725x40
2100x750	166115 XX 21075	67,6 kg	2130x775x40
2100x800	166115 XX 21080	71,9 kg	2130x825x40
2100x900	166115 XX 21090	80,7 kg	2130x925x40
2100x1000	166115 XX 210100	89,6 kg	2130x1025x40

Dimensional tolerance: ±1%

Weight based on average thickness | Cardboard packaging: 1.41 kg/m²

Replace “XX” with: 10 White; 22 Grey; 23 Sand; 26 Anthracite; 30 Black

Maintenance

Avoid contact with lacquers, nail polish remover, organic solvents, lit cigarettes or other corrosive products.
Do not clean with abrasive pads. Use only water, neutral soap and a soft cloth.

Standard: EN 14527 – CL1 + CL2
Standard: EN 16165 (Annex A) – A