

Planíssima

Acrylic



Perimeter edge 75 mm



Smooth surface



45 mm internal depth



Gloss finish



Thermoformed acrylic sheet with structural reinforcement



Floor-mounted installation



Ø90 mm waste with trap included
(water flow rate at 15 mm: 60 L/m)

Material **Acrylic**

Acrylic is a lightweight and durable material with a smooth finish and a warm touch. The thermoforming process of high-quality acrylic sheets ensures a non-porous surface, comfort of use and high colour stability.



Lightweight and impact-resistant material



Resistant to humidity and deformation



Allows seamless monobloc pieces



Warm and pleasant to the touch



Non-porous structure with high colour stability





Hygienic and water-repellent finish,
allowing easy cleaning

Colour



White

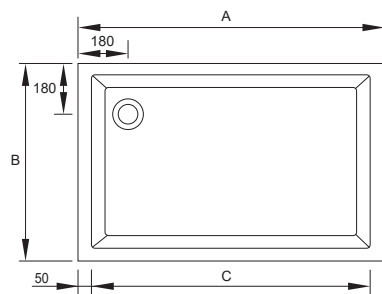

DIMENSIONS AXB (mm)	REFERENCE	C	INTERNAL DEPTH	NET WEIGHT	VOLUME
900x700	160306109070	800	45	10,8 kg	920x720x90
900x750	160306109075	800	45	11,4 kg	920x770x90
900x800	160306109080	800	45	11,9 kg	920x820x90
1000x700	1603061010070	900	45	12,4 kg	1020x720x90
1000x750	1603061010075	900	45	12,8 kg	1020x770x90
1000x800	1603061010080	900	45	13,1 kg	1020x820x90
1000x900	1603061010090	900	45	13,4 kg	1020x920x90
1100x700	1603061011070	1000	45	12,6 kg	1120x720x90
1100x750	1603061011075	1000	45	13,2 kg	1120x770x90
1100x800	1603061011080	1000	45	13,6 kg	1120x820x90
1100x900	1603061011090	1000	45	16,1 kg	1120x920x90
1200x700	1603061012070	1100	45	13,7 kg	1220x720x90
1200x750	1603061012075	1100	45	13,9 kg	1220x770x90
1200x800	1603061012080	1100	45	16,1 kg	1220x820x90
1200x900	1603061012090	1100	45	18,6 kg	1220x920x90
1300x700	1603061013070	1200	45	16 kg	1320x720x90
1300x750	1603061013075	1200	45	14,7 kg	1320x770x90
1300x800	1603061013080	1200	45	18,1 kg	1320x820x90
1300x900	1603061013090	1200	45	20,6 kg	1320x920x90
1400x700	1603061014070	1300	45	16,7 kg	1420x720x90
1400x750	1603061014075	1300	45	18,1 kg	1420x770x90
1400x800	1603061014080	1300	45	20,8 kg	1420x820x90
1400x900	1603061014090	1300	45	22,5 kg	1420x920x90

DIMENSIONS AXB (mm)	REFERENCE	C	INTERNAL DEPTH	NET WEIGHT	VOLUME
1500x700	1603061015070	1400	45	18 kg	1520x720x90
1500x750	1603061015075	1400	45	20 kg	1520x770x90
1500x800	1603061015080	1400	45	22,5 kg	1520x820x90
1500x900	1603061015090	1400	45	23 kg	1520x920x90
1600x700	1603061016070	1500	45	18,4 kg	1620x720x90
1600x750	1603061016075	1500	45	18,3 kg	1620x770x90
1600x800	1603061016080	1500	45	25,3 kg	1620x820x90
1600x900	1603061016090	1500	45	24,6 kg	1620x920x90
1700x700	1603061017070	1600	45	19,8 kg	1720x720x90
1700x750	1603061017075	1600	45	23,7 kg	1720x770x90
1700x800	1603061017080	1600	45	23,9 kg	1720x820x90
1700x900	1603061017090	1600	45	27,7 kg	1720x920x90
1800x700	1603061018070	1700	45	21,2 kg	1820x720x90
1800x750	1603061018075	1700	45	22 kg	1820x770x90
1800x800	1603061018080	1700	45	24,6 kg	1820x820x90
1800x900	1603061018090	1700	45	28,2 kg	1820x920x90
1900x800	1603061019080	1800	45	26,2 kg	1920x820x90
1900x900	1603061019090	1800	45	28,9 kg	1920x920x90
2000x800	1603061020080	1900	45	27,8 kg	2020x820x90
2000x900	1603061020090	1900	45	30,7 kg	2020x920x90

Dimensional tolerance +/- 1%

Cardboard packaging: 1,41 kg/m²

Maintenance

Avoid contact with lacquers, nail polish remover, organic solvents, lit cigarettes or other corrosive products. Do not clean with abrasive scourers. Clean only with water, neutral soap and a soft cloth.

STANDARD: NP EN 14527:2006 + A1 (2013)