

Planíssima Canto

Acrylic



Perimeter edge 75 mm



45 mm internal depth



Thermoformed acrylic sheet with structural reinforcement



Ø90 mm waste with trap included
(water flow rate at 15 mm: 60 L/m)



Smooth surface



Gloss finish



Floor-mounted installation

Material *Acrylic*

Acrylic is a lightweight and durable material with a smooth finish and a warm touch. The thermoforming process of high-quality acrylic sheets ensures a non-porous surface, comfort of use and high colour stability.



Lightweight and impact-resistant material



Allows seamless monobloc pieces



Non-porous structure with high colour stability



Resistant to humidity and deformation



Warm and pleasant to the touch




Hygienic and water-repellent finish,
allowing easy cleaning

Colour



White

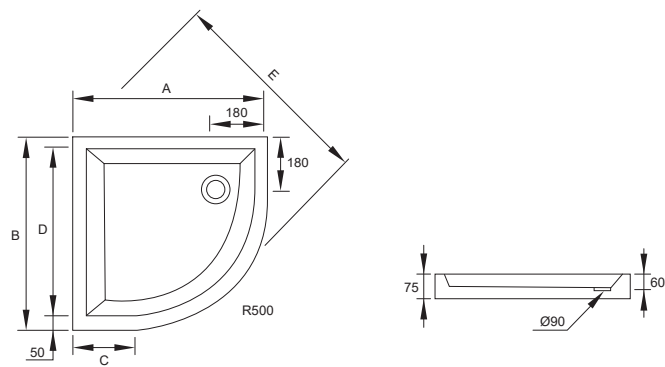

DIMENSIONS AXB (mm)	REFERENCE	C	D	E	INTERNAL DEPTH	NET WEIGHT	VOLUME
750x750	160304107575	300	650	860	45	9,2 kg	770x770x90
800x800	160304108080	330	700	930	45	10,2 kg	820x820x90
900x900	160304109090	450	800	1070	45	12,6 kg	920x920x90
1000x1000	16030410100100	520	900	1220	45	14,9 kg	1020x1020x90

Dimensional tolerance +/- 1%

Cardboard packaging: 1,41 kg/m²

Maintenance

Avoid contact with lacquers, nail polish remover, organic solvents, lit cigarettes or other corrosive products. Do not clean with abrasive scourers. Clean only with water, neutral soap and a soft cloth.

STANDARD: NP EN 14527:2006 + A1 (2013)