

Easyhelp 25 Canto

Acrylic



Perimeter edge 10 mm



25 mm internal depth



Thermoformed acrylic sheet with structural reinforcement



Ø90 mm waste with trap included
(water flow rate at 15 mm: 60 L/m)



Smooth surface



Gloss finish



Flush installation



Ideal for easy accessibility

Material *Acrylic*

Acrylic is a lightweight and durable material with a smooth finish and a warm touch. The thermoforming process of high-quality acrylic sheets ensures a non-porous surface, comfort of use and high colour stability.



Lightweight and impact-resistant material



Allows seamless monobloc pieces



Non-porous structure with high colour stability



Resistant to humidity and deformation



Warm and pleasant to the touch




Hygienic and water-repellent finish,
allowing easy cleaning

Colour



White

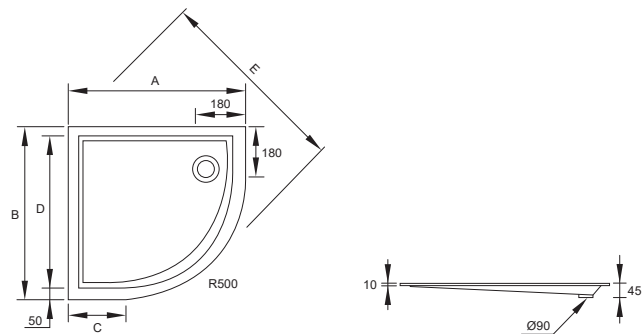

DIMENSIONS AXB (mm)	REFERENCE	C	D	E	INTERNAL DEPTH	NET WEIGHT	VOLUME
800x800	160603108080	330	700	930	25	10,2 kg	820x820x65
900x900	160603109090	450	800	1070	25	11,3 kg	920x920x65
1000x1000	16060310100100	520	900	1220	25	15,9 kg	1020x1020x65

Dimensional tolerance +/- 1%

Cardboard packaging: 1,41 kg/m²

Maintenance

E Avoid contact with lacquers, nail polish remover, organic solvents, lit cigarettes or other corrosive products. Do not clean with abrasive scourers. Clean only with water, neutral soap and a soft cloth.

STANDARD: NP EN 14527:2006 + A1 (2013)