

Easyhelp 45

Acrylic



Perimeter edge 10 mm



45 mm internal depth



Thermoformed acrylic sheet with structural reinforcement



Ø90 mm waste with trap included
(water flow rate at 15 mm: 60 L/m)



Smooth surface



Gloss finish



Flush installation



Ideal for easy accessibility

Material *Acrylic*

Acrylic is a lightweight and durable material with a smooth finish and a warm touch. The thermoforming process of high-quality acrylic sheets ensures a non-porous surface, comfort of use and high colour stability.



Lightweight and impact-resistant material



Allows seamless monobloc pieces



Non-porous structure with high colour stability



Resistant to humidity and deformation



Warm and pleasant to the touch




Hygienic and water-repellent finish,
allowing easy cleaning

Colour



White

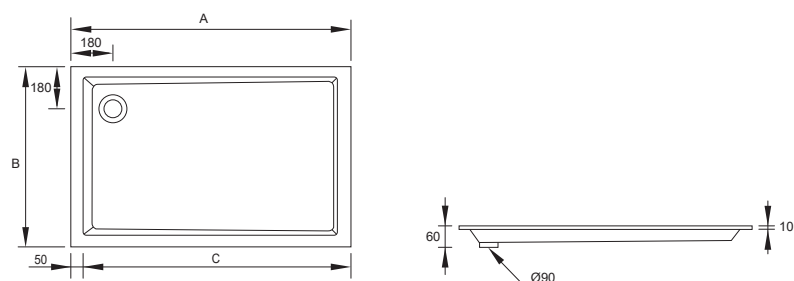

DIMENSIONS AXB (mm)	REFERENCE	C	INTERNAL DEPTH	NET WEIGHT	VOLUME
900x700	160606109070	800	45	13,2 kg	920x720x90
900x750	160606109075	800	45	14,1 kg	920x770x90
900x800	160606109080	800	45	15,1 kg	920x820x90
1000x700	1606061010070	900	45	14,6 kg	1020x720x90
1000x750	1606061010075	900	45	15,7 kg	1020x770x90
1000x800	1606061010080	900	45	16,8 kg	1020x820x90
1000x900	1606061010090	900	45	18,9 kg	1020x920x90
1100x700	1606061011070	1000	45	16,1 kg	1120x720x90
1100x750	1606061011075	1000	45	17,3 kg	1120x770x90
1100x800	1606061011080	1000	45	18,5 kg	1120x820x90
1100x900	1606061011090	1000	45	20,8 kg	1120x920x90
1200x700	1606061012070	1100	45	17,6 kg	1220x720x90
1200x750	1606061012075	1100	45	18,9 kg	1220x770x90
1200x800	1606061012080	1100	45	20,2 kg	1220x820x90
1200x900	1606061012090	1100	45	22,7 kg	1220x920x90
1300x700	1606061013070	1200	45	19,1 kg	1320x720x90
1300x750	1606061013075	1200	45	20,5 kg	1320x770x90
1300x800	1606061013080	1200	45	21,9 kg	1320x820x90
1300x900	1606061013090	1200	45	24,6 kg	1320x920x90
1400x700	1606061014070	1300	45	20,6 kg	1420x720x90
1400x750	1606061014075	1300	45	22,1 kg	1420x770x90
1400x800	1606061014080	1300	45	23,6 kg	1420x820x90
1400x900	1606061014090	1300	45	26,6 kg	1420x920x90

DIMENSIONS AXB (mm)	REFERENCE	C	INTERNAL DEPTH	NET WEIGHT	VOLUME
1500x700	1606061015070	1400	45	22,1 kg	1520x720x90
1500x750	1606061015075	1400	45	23,7 kg	1520x770x90
1500x800	1606061015080	1400	45	25,3 kg	1520x820x90
1500x900	1606061015090	1400	45	28,5 kg	1520x920x90
1600x700	1606061016070	1500	45	23,6 kg	1620x720x90
1600x750	1606061016075	1500	45	25,3 kg	1620x770x90
1600x800	1606061016080	1500	45	27 kg	1620x820x90
1600x900	1606061016090	1500	45	30,4 kg	1620x920x90
1700x700	1606061017070	1600	45	25,1 kg	1720x720x90
1700x750	1606061017075	1600	45	26,9 kg	1720x770x90
1700x800	1606061017080	1600	45	28,7 kg	1720x820x90
1700x900	1606061017090	1600	45	32,3 kg	1720x920x90
1800x700	1606061018070	1700	45	26,6 kg	1820x720x90
1800x750	1606061018075	1700	45	28,5 kg	1820x770x90
1800x800	1606061018080	1700	45	30,4 kg	1820x820x90
1800x900	1606061018090	1700	45	34,2 kg	1820x920x90
1900x800	1606061019080	1800	45	31 kg	1920x820x90
1900x900	1606061019090	1800	45	32,2 kg	1920x920x90
2000x800	1606061020080	1900	45	32,6 kg	2020x820x90
2000x900	1606061020090	1900	45	34,5 kg	2020x920x90

Dimensional tolerance +/- 1%

Cardboard packaging: 1,41 kg/m²

Maintenance

E Avoid contact with lacquers, nail polish remover, organic solvents, lit cigarettes or other corrosive products. Do not clean with abrasive scourers. Clean only with water, neutral soap and a soft cloth.

STANDARD: NP EN 14527:2006 + A1 (2013)