

Easyhelp 25

Acrylic



Perimeter edge 10 mm



25 mm internal depth



Thermoformed acrylic sheet with structural reinforcement



Ø90 mm waste with trap included
(water flow rate at 15 mm: 60 L/m)



Smooth surface



Gloss finish



Flush installation



Ideal for easy accessibility

Material *Acrylic*

Acrylic is a lightweight and durable material with a smooth finish and a warm touch. The thermoforming process of high-quality acrylic sheets ensures a non-porous surface, comfort of use and high colour stability.



Lightweight and impact-resistant material



Allows seamless monobloc pieces



Non-porous structure with high colour stability



Resistant to humidity and deformation



Warm and pleasant to the touch





Hygienic and water-repellent finish,
allowing easy cleaning

Colour



White

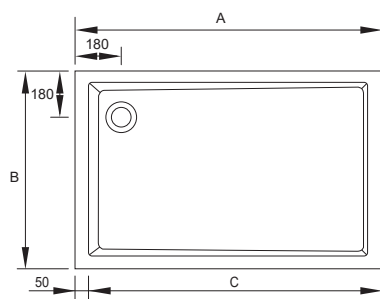

DIMENSIONS AXB (mm)	REFERENCE	C	INTERNAL DEPTH	NET WEIGHT	VOLUME
900x700	160605109070	800	25	12,3 kg	920x720x65
900x750	160605109075	800	25	13,2 kg	920x770x65
900x800	160605109080	800	25	14,1 kg	920x820x65
1000x700	1606051010070	900	25	12,5 kg	1020x720x65
1000x750	1606051010075	900	25	14,7 kg	1020x770x65
1000x800	1606051010080	900	25	15,9 kg	1020x820x65
1000x900	1606051010090	900	25	17,7 kg	1020x920x65
1100x700	1606051011070	1000	25	15,1 kg	1120x720x65
1100x750	1606051011075	1000	25	16,2 kg	1120x770x65
1100x800	1606051011080	1000	25	17,3 kg	1120x820x65
1100x900	1606051011090	1000	25	20,4 kg	1120x920x65
1200x700	1606051012070	1100	25	16,5 kg	1220x720x65
1200x750	1606051012075	1100	25	17,7 kg	1220x770x65
1200x800	1606051012080	1100	25	18,9 kg	1220x820x65
1200x900	1606051012090	1100	25	21,3 kg	1220x920x65
1300x700	1606051013070	1200	25	16,8 kg	1320x720x65
1300x750	1606051013075	1200	25	19,2 kg	1320x770x65
1300x800	1606051013080	1200	25	20,5 kg	1320x820x65
1300x900	1606051013090	1200	25	23,1 kg	1320x920x65
1400x700	1606051014070	1300	25	19,3 kg	1420x720x65
1400x750	1606051014075	1300	25	20,7 kg	1420x770x65
1400x800	1606051014080	1300	25	22,1 kg	1420x820x65
1400x900	1606051014090	1300	25	24,9 kg	1420x920x65

DIMENSIONS AXB (mm)	REFERENCE	C	INTERNAL DEPTH	NET WEIGHT	VOLUME
1500x700	1606051015070	1400	25	20,7 kg	1520x720x65
1500x750	1606051015075	1400	25	22,2 kg	1520x770x65
1500x800	1606051015080	1400	25	23,7 kg	1520x820x65
1500x900	1606051015090	1400	25	26,7 kg	1520x920x65
1600x700	1606051016070	1500	25	22,1 kg	1620x720x65
1600x750	1606051016075	1500	25	23,7 kg	1620x770x65
1600x800	1606051016080	1500	25	25,3 kg	1620x820x65
1600x900	1606051016090	1500	25	28,5 kg	1620x920x65
1700x700	1606051017070	1600	25	23,5 kg	1720x720x65
1700x750	1606051017075	1600	25	25,3 kg	1720x770x65
1700x800	1606051017080	1600	25	26,9 kg	1720x820x65
1700x900	1606051017090	1600	25	30,3 kg	1720x920x65
1800x700	1606051018070	1700	25	24,9 kg	1820x720x65
1800x750	1606051018075	1700	25	26,8 kg	1820x770x65
1800x800	1606051018080	1700	25	28,5 kg	1820x820x65
1800x900	1606051018090	1700	25	32,1 kg	1820x920x65
1900x800	1606051019080	1800	25	30,1 kg	1920x820x65
1900x900	1606051019090	1800	25	33,8 kg	1920x920x65
2000x800	1606051020080	1900	25	31,7 kg	2020x820x65
2000x900	1606051020090	1900	25	33 kg	2020x920x65

Dimensional tolerance +/- 1%

Cardboard packaging: 1,41 kg/m²

Maintenance

Avoid contact with lacquers, nail polish remover, organic solvents, lit cigarettes or other corrosive products. Do not clean with abrasive scourers. Clean only with water, neutral soap and a soft cloth.

STANDARD: NP EN 14527:2006 + A1 (2013)