


## Iris

## Planstone



Height 25 to 28 mm

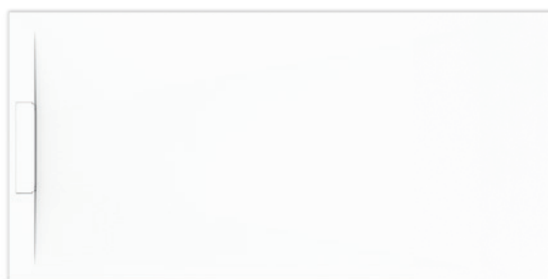

Smooth texture



Certified anti-slip finish, class C3



Colour-matched lacquered cover



Floor-mounted or flush installation



265x64 mm waste with trap included  
(water flow rate at 15 mm: 60 L/m)



Cutting, angle cutting or trimming available



Straight cut available

## Material **Planstone**

Planstone is a composite material that combines the aesthetics of natural stone with high technical performance. It is made from a blend of mineral fillers and high-purity resins, resulting in a solid, homogeneous and highly resistant structure.



Mineral composite with polyester resin



Non-porous and homogeneous material



100% waterproof, no waterproofing membrane required



Certified anti-slip finish



Sanitary antibacterial gel coat (ISO NPG)

## Standard Colours

Note: The colour of the lacquered cover may vary slightly.



(10) White


(23) Sand

(22) Grey

(26) Anthracite

(30) Black

Supplied with a lacquered cover to match the tray (standard). Other RAL colours are available on request.

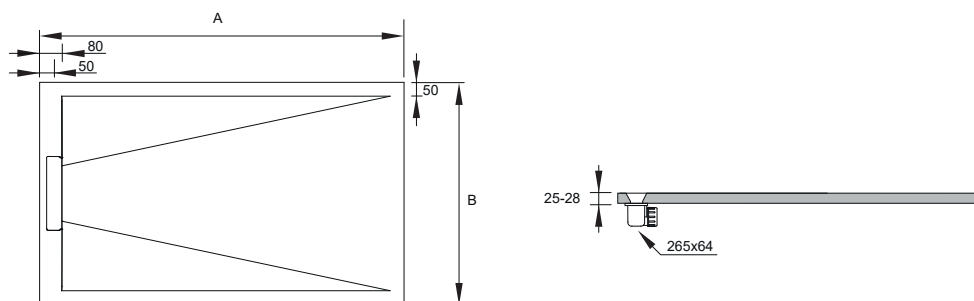

| DIMENSIONS AXB (mm) | REFERENCE        | NET WEIGHT |
|---------------------|------------------|------------|
| 800x700             | 167115 XX 8070   | 24,9 kg    |
| 800x800             | 167111 XX 8080   | 28,6 kg    |
| 900x700             | 167115 XX 9070   | 28 kg      |
| 900x750             | 167115 XX 9075   | 30 kg      |
| 900x800             | 167115 XX 9080   | 32,1 kg    |
| 900x900             | 167111 XX 9090   | 36,2 kg    |
| 1000x700            | 167115 XX 10070  | 31,1 kg    |
| 1000x750            | 167115 XX 10075  | 33,3 kg    |
| 1000x800            | 167115 XX 10080  | 35,6 kg    |
| 1000x900            | 167115 XX 10090  | 40,1 kg    |
| 1000x1000           | 167111 XX 100100 | 44,6 kg    |
| 1100x700            | 167115 XX 11070  | 34,1 kg    |
| 1100x750            | 167115 XX 11075  | 36,6 kg    |
| 1100x800            | 167115 XX 11080  | 39,1 kg    |
| 1100x900            | 167115 XX 11090  | 44,1 kg    |
| 1100x1000           | 167115 XX 110100 | 49 kg      |
| 1200x700            | 167115 XX 12070  | 37,2 kg    |
| 1200x750            | 167115 XX 12075  | 39,9 kg    |
| 1200x800            | 167115 XX 12080  | 42,6 kg    |
| 1200x900            | 167115 XX 12090  | 48 kg      |
| 1200x1000           | 167115 XX 120100 | 53,4 kg    |
| 1300x700            | 167115 XX 13070  | 40,3 kg    |
| 1300x750            | 167115 XX 13075  | 43,2 kg    |
| 1300x800            | 167115 XX 13080  | 46,1 kg    |
| 1300x900            | 167115 XX 13090  | 52 kg      |
| 1300x1000           | 167115 XX 130100 | 57,8 kg    |
| 1400x700            | 167115 XX 14070  | 43,4 kg    |
| 1400x750            | 167115 XX 14075  | 46,5 kg    |
| 1400x800            | 167115 XX 14080  | 49,6 kg    |
| 1400x900            | 167115 XX 14090  | 55,9 kg    |
| 1400x1000           | 167115 XX 140100 | 62,2 kg    |
| 1500x700            | 167115 XX 15070  | 46,4 kg    |
| 1500x750            | 167115 XX 15075  | 49,8 kg    |
| 1500x800            | 167115 XX 15080  | 53,1 kg    |
| 1500x900            | 167115 XX 15090  | 59,8 kg    |
| 1500x1000           | 167115 XX 150100 | 66,5 kg    |

| DIMENSIONS AXB (mm) | REFERENCE        | NET WEIGHT |
|---------------------|------------------|------------|
| 1600x700            | 167115 XX 16070  | 49,5 kg    |
| 1600x750            | 167115 XX 16075  | 53,1 kg    |
| 1600x800            | 167115 XX 16080  | 56,6 kg    |
| 1600x900            | 167115 XX 16090  | 63,8 kg    |
| 1600x1000           | 167115 XX 160100 | 70,9 kg    |
| 1700x700            | 167115 XX 17070  | 52,6 kg    |
| 1700x750            | 167115 XX 17075  | 56,4 kg    |
| 1700x800            | 167115 XX 17080  | 60,1 kg    |
| 1700x900            | 167115 XX 17090  | 67,7 kg    |
| 1700x1000           | 167115 XX 170100 | 75,3 kg    |
| 1800x700            | 167115 XX 18070  | 55,6 kg    |
| 1800x750            | 167115 XX 18075  | 59,6 kg    |
| 1800x800            | 167115 XX 18080  | 63,6 kg    |
| 1800x900            | 167115 XX 18090  | 71,7 kg    |
| 1800x1000           | 167115 XX 180100 | 79,7 kg    |
| 1900x700            | 167115 XX 19070  | 58,7 kg    |
| 1900x750            | 167115 XX 19075  | 62,9 kg    |
| 1900x800            | 167115 XX 19080  | 67,2 kg    |
| 1900x900            | 167115 XX 19090  | 75,6 kg    |
| 1900x1000           | 167115 XX 190100 | 84,1 kg    |
| 2000x700            | 167115 XX 20070  | 61,8 kg    |
| 2000x750            | 167115 XX 20075  | 66,2 kg    |
| 2000x800            | 167115 XX 20080  | 70,7 kg    |
| 2000x900            | 167115 XX 20090  | 79,6 kg    |
| 2000x1000           | 167115 XX 200100 | 88,4 kg    |
| 2100x700            | 167115 XX 21070  | 64,8 kg    |
| 2100x750            | 167115 XX 21075  | 69,5 kg    |
| 2100x800            | 167115 XX 21080  | 74,2 kg    |
| 2100x900            | 167115 XX 21090  | 83,5 kg    |
| 2100x1000           | 167115 XX 210100 | 92,8 kg    |

Replace "XX" with: 10 White; 22 Grey; 23 Sand; 26 Anthracite; 30 Black  
Dimensional tolerance: ±1% | Weight based on average thickness

Cardboard packaging: 1.41 kg/m<sup>2</sup> | Cardboard packaging volume: (A+30 mm) x (B+25 mm) x 40 mm  
Wooden packaging: 20.65 kg/m<sup>2</sup> | Wooden packaging volume: (A+75 mm) x (B+75 mm) x 175 mm

## Maintenance

Avoid contact with lacquers, nail polish remover, organic solvents, lit cigarettes or other corrosive products.  
Do not clean with abrasive pads. Use only water, neutral soap and a soft cloth.

Standard: EN 14527 – CL1 + CL2  
Standard: EN 16165 – C3