

Hidden

Planstone



Height 28 to 30 mm



Smooth texture



Certified anti-slip finish, class C3



Colour-matched lacquered cover



Floor-mounted or flush installation



Ø90 mm waste with trap included
(water flow rate at 15 mm: 60 L/m)



Cutting, angle cutting or trimming available



Straight cut available

Material **Planstone**

Planstone is a composite material that combines the aesthetics of natural stone with high technical performance. It is made from a blend of mineral fillers and high-purity resins, resulting in a solid, homogeneous and highly resistant structure.



Mineral composite with polyester resin



Non-porous and homogeneous material



100% waterproof, no waterproofing membrane required



Certified anti-slip finish



Sanitary antibacterial gel coat (ISO NPG)

Standard Colours

Note: The colour of the lacquered cover may vary slightly.



(10) White


(23) Sand

(22) Grey

(26) Anthracite

(30) Black

Supplied with a lacquered cover to match the tray (standard). Other RAL colours are available on request.

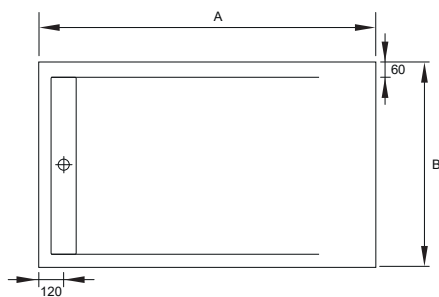

DIMENSIONS AXB (mm)	REFERENCE	NET WEIGHT
800x800	167211 XX 8080	30,7 kg
900x900	167211 XX 9090	38,6 kg
1000x700	167215 XX 10070	33,6 kg
1000x750	167215 XX 10075	35,9 kg
1000x800	167215 XX 10080	38,2 kg
1000x900	167215 XX 10090	42,8 kg
1000x1000	167211 XX 100100	47,4 kg
1100x700	167215 XX 11070	37 kg
1100x750	167215 XX 11075	39,5 kg
1100x800	167215 XX 11080	42 kg
1100x900	167215 XX 11090	47 kg
1100x1000	167215 XX 110100	52 kg
1200x700	167215 XX 12070	40,3 kg
1200x750	167215 XX 12075	43 kg
1200x800	167215 XX 12080	45,8 kg
1200x900	167215 XX 12090	51,2 kg
1200x1000	167215 XX 120100	56,3 kg
1300x700	167215 XX 13070	43,6 kg
1300x750	167215 XX 13075	46,6 kg
1300x800	167215 XX 13080	49,5 kg
1300x900	167215 XX 13090	55,4 kg
1300x1000	167215 XX 130100	61,4 kg
1400x700	167215 XX 14070	46,9 kg
1400x750	167215 XX 14075	50,1 kg
1400x800	167215 XX 14080	53,3 kg
1400x900	167215 XX 14090	59,7 kg
1400x1000	167215 XX 140100	66 kg
1500x700	167215 XX 15070	50,3 kg
1500x750	167215 XX 15075	53,7 kg
1500x800	167215 XX 15080	57,1 kg
1500x900	167215 XX 15090	63,9 kg
1500x1000	167215 XX 150100	70,7 kg
1600x700	167215 XX 16070	53,6 kg
1600x750	167215 XX 16075	57,2 kg
1600x800	167215 XX 16080	60,8 kg
1600x900	167215 XX 16090	68,1 kg
1600x1000	167215 XX 160100	75,4 kg

DIMENSIONS AXB (mm)	REFERENCE	NET WEIGHT
1700x700	167215 XX 17070	56,9 kg
1700x750	167215 XX 17075	60,8 kg
1700x800	167215 XX 17080	64,6 kg
1700x900	167215 XX 17090	72,3 kg
1700x1000	167215 XX 170100	80 kg
1800x700	167215 XX 18070	60,2 kg
1800x750	167215 XX 18075	64,3 kg
1800x800	167215 XX 18080	68,4 kg
1800x900	167215 XX 18090	76,5 kg
1800x1000	167215 XX 180100	84,7 kg
1900x700	167215 XX 19070	63,6 kg
1900x750	167215 XX 19075	67,9 kg
1900x800	167215 XX 19080	72,2 kg
1900x900	167215 XX 19090	80,8 kg
1900x1000	167215 XX 190100	89,4 kg
2000x700	167215 XX 20070	66,9 kg
2000x750	167215 XX 20075	71,4 kg
2000x800	167215 XX 20080	75,9 kg
2000x900	167215 XX 20090	85 kg
2000x1000	167215 XX 200100	94 kg
2100x700	167215 XX 21070	70,2 kg
2100x750	167215 XX 21075	75 kg
2100x800	167215 XX 21080	79,7 kg
2100x900	167215 XX 21090	89,2 kg
2100x1000	167215 XX 210100	98,7 kg
2200x700	167205 XX 22070	73,5 kg
2200x750	167205 XX 22075	78,5 kg
2200x800	167205 XX 22080	83,5 kg
2200x900	167205 XX 22090	93,4 kg
2200x1000	167205 XX 220100	103,4 kg
2300x700	167205 XX 23070	76,9 kg
2300x750	167205 XX 23075	82,1 kg
2300x800	167205 XX 23080	87,3 kg
2300x900	167205 XX 23090	97,7 kg
2300x1000	167205 XX 230100	108 kg
2600x800	167205 XX 26080	98,6 kg
2600x900	167205 XX 26090	110,3 kg
2600x1000	167205 XX 260100	122,1 kg

Replace "XX" with: 10 White; 22 Grey; 23 Sand; 26 Anthracite; 30 Black
Dimensional tolerance: ±1% | Weight based on average thickness

Cardboard packaging: 1.41 kg/m² | Cardboard packaging volume: (A+30 mm) x (B+25 mm) x 40 mm
Wooden packaging: 20.65 kg/m² | Wooden packaging volume: (A+75 mm) x (B+75 mm) x 175 mm

Maintenance

Avoid contact with lacquers, nail polish remover, organic solvents, lit cigarettes or other corrosive products.
Do not clean with abrasive pads. Use only water, neutral soap and a soft cloth.

Standard: EN 14527 – CL1 + CL2
Standard: EN 16165 – C3