Technical Information

Duo *Planstone*



- Height 25 to 28 mm
- Stone texture
- Colour-matched lacquered cover
- Floor-mounted or flush installation
- 265x64 mm waste with trap included (water flow rate at 15 mm: 60 L/m)
- Cutting, angle cutting or trimming available
- Straight cut available


Material ***Planstone***

Planstone is a composite material that combines the aesthetics of natural stone with high technical performance. It is made from a blend of mineral fillers and high-purity resins, resulting in a solid, homogeneous and highly resistant structure.

- Mineral composite with polyester resin
- Non-porous and homogeneous material
- 100% waterproof, no waterproofing membrane required
- Certified anti-slip finish
- Sanitary antibacterial gel coat (ISO NPG)

Standard Colours


Note: The colour of the lacquered cover may vary slightly.



(10) White | (23) Sand | (22) Grey | (26) Anthracite | (30) Black

Cover finish

Stainless steel or other RAL colours (available on request, subject to confirmation).

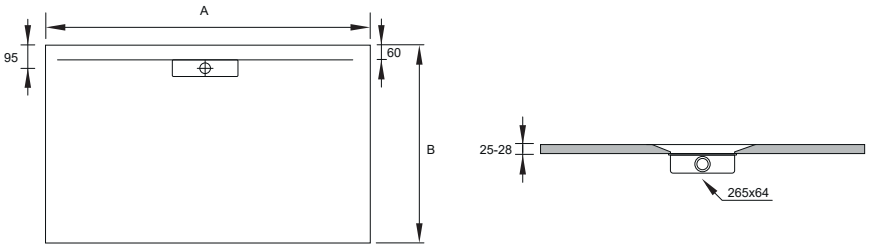

DIMENSIONS AXB (mm)	REFERENCE	NET WEIGHT
1000x800	165115 XX 10080	36,1 kg
1000x900	165115 XX 10090	40,4 kg
1100x800	165115 XX 11080	39,7 kg
1100x900	165115 XX 11090	44,5 kg
1100x1000	165115 XX 110100	49,2 kg
1200x800	165115 XX 12080	43,4 kg
1200x900	165115 XX 12090	48,6 kg
1200x1000	165115 XX 120100	53,8 kg
1300x800	165115 XX 13080	47,1 kg
1300x900	165115 XX 13090	52,7 kg
1300x1000	165115 XX 130100	58,3 kg
1400x800	165115 XX 14080	50,7 kg
1400x900	165115 XX 14090	56,8 kg
1400x1000	165115 XX 140100	62,8 kg
1500x800	165115 XX 15080	54,4 kg
1500x900	165115 XX 15090	60,9 kg
1500x1000	165115 XX 150100	67,4 kg
1600x800	165115 XX 16080	58,1 kg
1600x900	165115 XX 16090	65 kg
1600x1000	165115 XX 160100	71,9 kg
1700x800	165115 XX 17080	61,7 kg
1700x900	165115 XX 17090	69,1 kg
1700x1000	165115 XX 170100	76,4 kg
1800x800	165115 XX 18080	65,4 kg
1800x900	165115 XX 18090	73,2 kg
1800x1000	165115 XX 180100	80,9 kg
1900x800	165115 XX 19080	69,1 kg
1900x900	165115 XX 19090	77,3 kg
1900x1000	165115 XX 190100	85,5 kg

DIMENSIONS AXB (mm)	REFERENCE	NET WEIGHT
2000x800	165115 XX 20080	72,7 kg
2000x900	165115 XX 20090	81,4 kg
2000x1000	165115 XX 200100	90 kg
2100x800	165115 XX 21080	76,4 kg
2100x900	165115 XX 21090	85,5 kg
2100x1000	165115 XX 210100	94,5 kg
2200x800	165105 XX 22080	80,1 kg
2200x900	165105 XX 22090	89,6 kg
2200x1000	165105 XX 220100	99,1 kg
2300x800	165105 XX 23080	83,7 kg
2300x900	165105 XX 23090	93,7 kg
2300x1000	165105 XX 230100	103,6 kg
2400x800	165105 XX 24080	87,4 kg
2400x900	165105 XX 24090	97,8 kg
2400x1000	165105 XX 240100	108,1 kg
2500x800	165105 XX 25080	91 kg
2500x900	165105 XX 25090	101,9 kg
2500x1000	165105 XX 250100	112,7 kg
2600x800	165105 XX 26080	94,7 kg
2600x900	165105 XX 26090	106 kg
2600x1000	165105 XX 260100	117,2 kg

Replace "XX" with: 10 White; 22 Grey; 23 Sand; 26 Anthracite; 30 Black
Dimensional tolerance: ±1% | Weight based on average thickness

Cardboard packaging: 1.41 kg/m² | Cardboard packaging volume: (A+30 mm) x (B+25 mm) x 40 mm
Wooden packaging: 20.65 kg/m² | Wooden packaging volume: (A+75 mm) x (B+75 mm) x 175 mm

Maintenance

Avoid contact with lacquers, nail polish remover, organic solvents, lit cigarettes or other corrosive products.
Do not clean with abrasive pads. Use only water, neutral soap and a soft cloth.

Standard: EN 14527 – CL1 + CL2
Standard: EN 16165 (Annex A) – A