

# LUCINO-B3


Surface Ceiling-Mounted LED



**Lucino B3** is a high-performance IP65 surface-mounted LED ceiling luminaire engineered for demanding indoor and outdoor environments where durability, uniform light output, and reliability are critical. Featuring a robust polycarbonate body and opal diffuser, it delivers wide-beam, glare-controlled illumination with consistent visual comfort. The sealed construction provides full protection against dust and water jets, while IK08 impact resistance ensures long-term performance in corridors, stairwells, parking areas, utility spaces, and semi-exposed locations. Lucino B3 supports multiple wattages and diameters to suit different mounting heights and applications, offering high luminous efficacy, stable light quality, and low maintenance—making it a practical, cost-efficient solution for residential, commercial, and light industrial projects.

## Technical Data

Type of Protection	IP65
Protection Class	Class II
Impact Protection	IK08
Housing Colour	White
Body Material	PC
Cover Material	PC
Installation	Surface Mounted
CRI	>80
Luminous Efficacy	90 lm/W
Colour Temperature	3000K / 4000K / 6500K
Beam Angle	120°
Operating Temperature	-20°C to +40°C

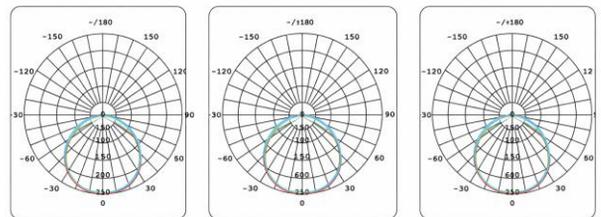

7032101  
10W

7032702  
20W

7033203  
24W



Model	Voltage/Frequency	Power	Number of LED	Luminous Flux	Dimensions Size	Installation Size
7032101	100–277V 50/60Hz	10W	84	900 lm	Ø210 × 57 mm	140 mm
7032702	100–277V 50/60Hz	20W	144	1800 lm	Ø270 × 57 mm	180 mm
7033203	100–277V 50/60Hz	24W	225	2100 lm	Ø320 × 57 mm	220 mm