

# ROMA PRO

Inground LED Uplight



**ROMA PRO** is a high-performance inground LED uplight engineered for demanding architectural and landscape applications where durability, precision optics, and long service life are critical. Built with a reinforced stainless-steel face cover and enhanced load resistance, it is suitable for pedestrian areas and exterior architectural detailing. Advanced optical control options deliver precise beam distribution with reduced glare, ensuring clean façade grazing and accent lighting. With its fully sealed, IP-rated construction and robust thermal management, ROMA PRO is designed for continuous outdoor operation in harsh environments, making it the professional-grade solution within the ROMA family.

## Technical Details

Product Type	Inground LED Uplight
Light Source	High-efficiency LED (CREE / CREE COB, variant-dependent)
Rated Power	6W – 16W (depending on variant)
Input Voltage	DC12V / DC24V / AC100–240V
Color Options	Single Color / RGB / RGBW
Beam Options	Narrow Spot, Spot, Flood, Wide Flood, Elliptical, Tilt Optics
Control Mode	Constant Current (CC) / DMX512 (variant-dependent)
Lifetime	50,000 hours
Protection Rating	IP66 / IP67
Operating Temperature	–25°C to +50°C
Ambient Humidity	10% – 90%
Housing	Outdoor-rated, corrosion-resistant construction
Application	Façade, landscape, pathway, feature and wall-wash lighting

# ROMA


Inground LED Uplight




Model Nos. 7010061, 7010062



Model Nos. 7021063, 7021064, 7021065

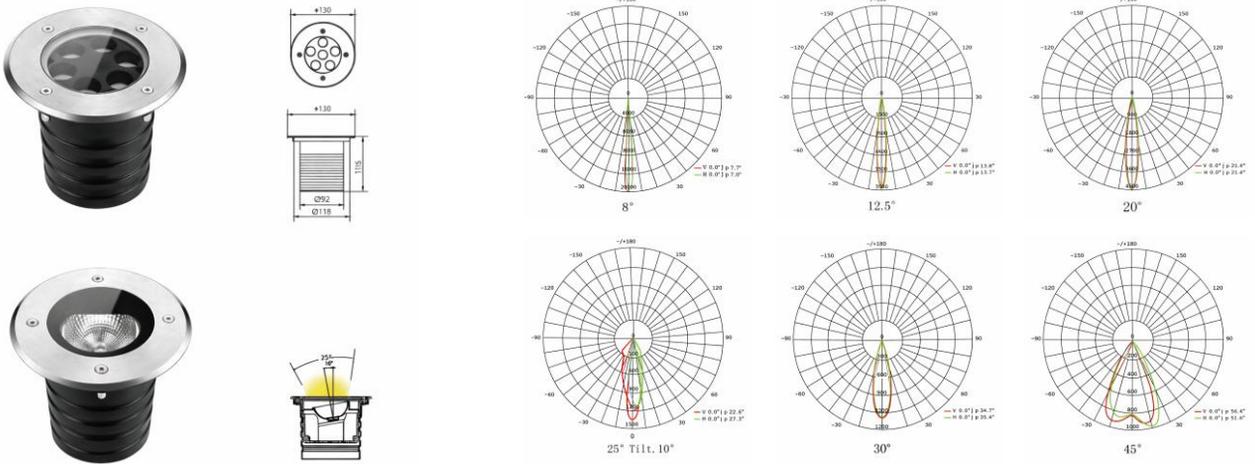

Model Nos. 7021096, 70210967, 7021098

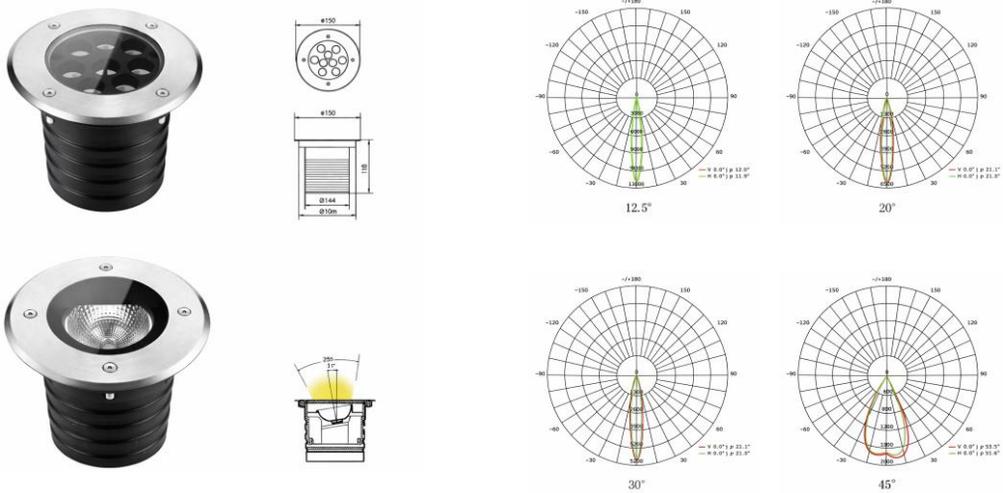

# ROMA

Inground LED Uplight



Model No.	LED Brand	LED Qty	Power (W)	Input Voltage	Color	Beam Angle	Control Mode	IP	Max in Series
7010061	CREE XP-L	1 pc	6W	DC24V / AC100–240V	Single	8° / 12° / 20° / 30° / 45° / 60° / 45° Tilt (Wall Wash)	CC	IP66	--
7010062	CREE RGBW 4-in-1	1 pc	6W	DC24V / DC12V	RGBW	15° / 20° / 30° / 45° / 15×60°	DMX512	IP66	--
7021063	CREE	6 pcs	12W	DC24V / AC100–240V	RGB / Single	8° / 12.5° / 20° / 30° / 45° / 60°	DMX512 / CC	IP67	12 / 110 pcs
7021064	CREE	6 pcs	7W	DC24V / AC100–240V	RGB / Single	8° / 12.5° / 20° / 30° / 45° / 60°	DMX512 / CC	IP67	20 / 180 pcs
7021065	CREE COB	1 pc	8W	DC24V / AC100–240V	Single	25° / Tilt 10°	CC	IP67	18 / 160 pcs
7021096	CREE	9 pcs	14W / 16W	DC12V / AC100–240V	RGB / Single	8° / 12.5° / 20° / 30° / 45° / 60°	DMX512 / CC	IP67	9 / 80 pcs
7021097	CREE	9 pcs	11W	DC24V / AC100–240V	RGB / Single	8° / 12.5° / 20° / 30° / 45° / 60°	DMX512 / CC	IP67	3 / 120 pcs
7021098	CREE COB	1 pc	12W	DC24V / AC100–240V	Single	25° / Tilt 10°	CC	IP67	12 / 110 pcs