


VERO C

Architectural Surface-Mounted LED Downlight



VERO-C is a compact IP65-rated ceiling-mounted downlight designed for controlled downward illumination in covered outdoor and architectural spaces. Its multi-LED optical array delivers uniform, glare-controlled light suitable for entrances, corridors, soffits, and canopies. Precision optics with multiple beam angle options ensure accurate light distribution, while the sealed aluminum housing provides reliable performance in humid and exposed environments. VERO-C balances visual comfort, durability, and clean architectural integration.

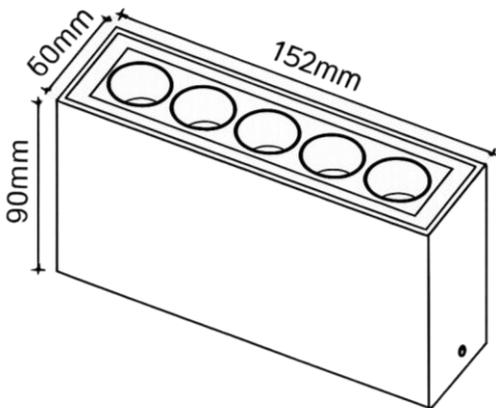

Housing Color Options

Primary: Matt Black RAL9005


Secondary: Signal White RAL9003
Gray Painting RAL9007

Material Specifications

Housing Material	Casting aluminum
Glass	Tempered glass, T = 3 mm
Lens	Optical lens, efficiency ≥85%
Cable gland	Copper and nickel coated
Gasket	Tooling shaped seal
LED	SMD LED
Operating temperature	-20 °C ~ 40 °C
Power cable	H05RN-F 2×0.75 mm ² , L = 0.5 m (low voltage) H05RN-F 3×0.75 mm ² , L = 0.5 m (high voltage)

VERO C

Architectural Surface-Mounted LED Downlight

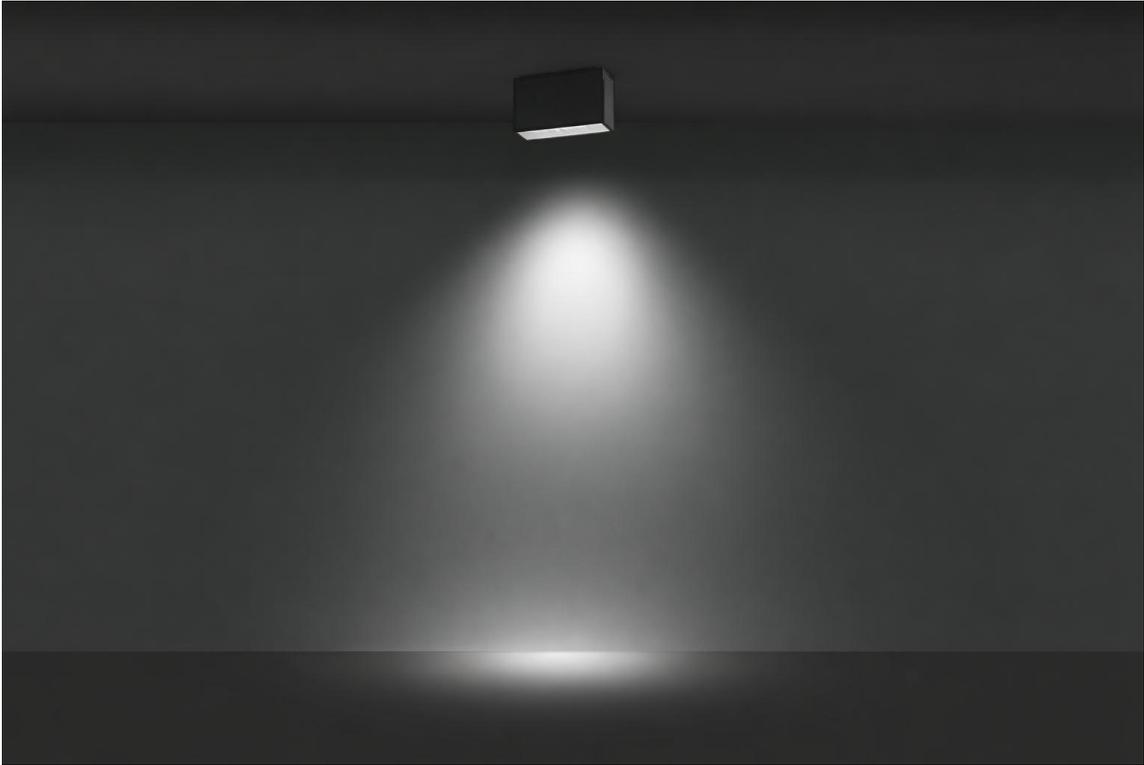

Item No.	Light source	Lens beam angle (°)	Consumption (watt)	Input Voltage (V)	IK rate
7015201	5×1W LED	8° / 15° / 20° / 30° / 45° / 60°	5W	DC12V / DC24V / AC220V / AC240V	6
7015202	5×2W LED	8° / 15° / 20° / 30° / 45° / 60°	10W	DC12V / DC24V / AC220V / AC240V	6