


# VERO SQW

Architectural Square Surface-Mounted LED Downlight



**VERO-SQW** is a square surface-mounted LED wall light engineered for durable and controlled architectural illumination. Built with an IP65-rated aluminum body and precision optics, it produces clean, directional light ideal for façades, perimeter walls, walkways, and semi-outdoor spaces. The compact square profile, combined with multiple beam and wattage options, allows designers to achieve consistent visual rhythm while maintaining high performance and long service life in demanding environments.

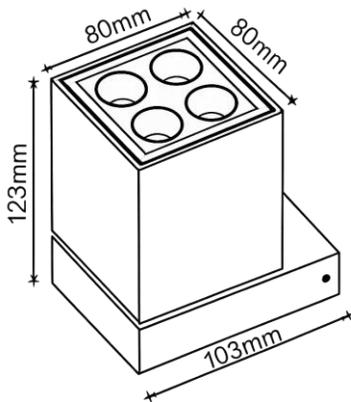

## Housing Color Options

Primary: Matt Black RAL9005

Secondary: Signal White RAL9003  
Gray Painting RAL9007

## Material Specifications

<b>Housing Material</b>	Casting aluminum
<b>Glass</b>	Tempered glass, T = 3 mm
<b>Lens</b>	Optical lens, efficiency $\geq 85\%$
<b>Cable gland</b>	Copper and nickel coated
<b>Gasket</b>	Tooling shaped seal
<b>LED</b>	SMD LED
<b>Operating temperature</b>	-20 °C ~ 40 °C
<b>Power cable</b>	H05RN-F 2×0.75 mm <sup>2</sup> , L = 0.5 m (low voltage) H05RN-F 3×0.75 mm <sup>2</sup> , L = 0.5 m (high voltage)

# VERO SQW

Architectural Square Surface-Mounted LED Downlight



Item No.	Light source	Lens beam angle (°)	Consumption (watt)	Input Voltage (V)	IK rate
7015231	4×1W LED	8° / 15° / 20° / 30° / 45° / 60°	4W	DC12V / DC24V / AC220V / AC240V	6
7015232	4×2W LED	8° / 15° / 20° / 30° / 45° / 60°	8W	DC12V / DC24V / AC220V / AC240V	6