


ARCO S

LED Window Light



ARCO S is a compact architectural LED window light engineered for precise linear and grazing illumination of façades, window reveals, and structural details. Its robust metal housing and minimalist form factor allow discreet integration while delivering uniform light distribution with controlled glare. Designed for exterior reliability, ARCO S offers stable performance in demanding environments and supports both single-color and RGBW configurations, making it suitable for accent lighting, façade articulation, and architectural highlights where clean lines and visual consistency are essential.

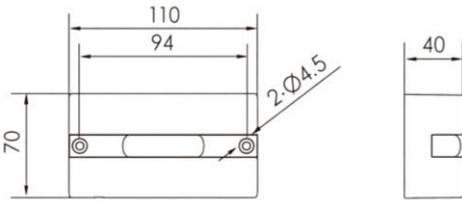

TECHNICAL DATA

Parameter	7032201	7032202
Product Code	7032201	7032202
LED Brand	CREE	CREE XP-G2
LED Quantity	3 pcs / 12 pcs	1 pcs
Rated Power	3 W	3 W / 5 W
Input Voltage	AC 100–240 V / DC 12 V	AC 100–240 V / DC 24 V
Frequency Range	50 / 60 Hz	50 / 60 Hz
Color	RGBW / Single	Single
Beam Angle	2° × 180°	2° × 180°
Control Mode	DMX512 / CC	CC
Lifetime	50,000 h	50,000 h
Protection Grade	IP65	IP65
Ambient Temperature	-25 °C to +50 °C	-25 °C to +50 °C
Ambient Humidity	10%–90%	10%–90%