



Security Gate



ID GATE 5600



PRODUCT DESCRIPTION

The ID GATE 5600 is a stylish and high-performance security gate for modern indoor access control solutions. It stands out with high operational reliability, elegant RGB lighting, and a fast opening mechanism—ideal for fitness studios, offices, industrial facilities, spas, or healthcare centers.

DIMENSIONS

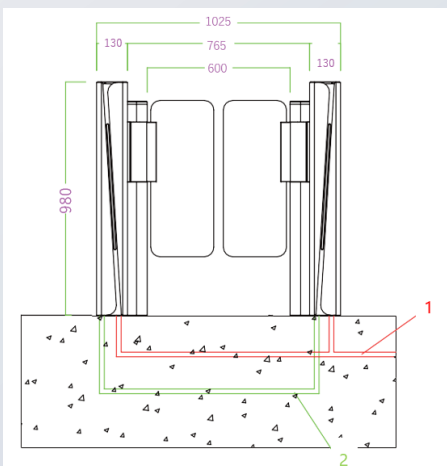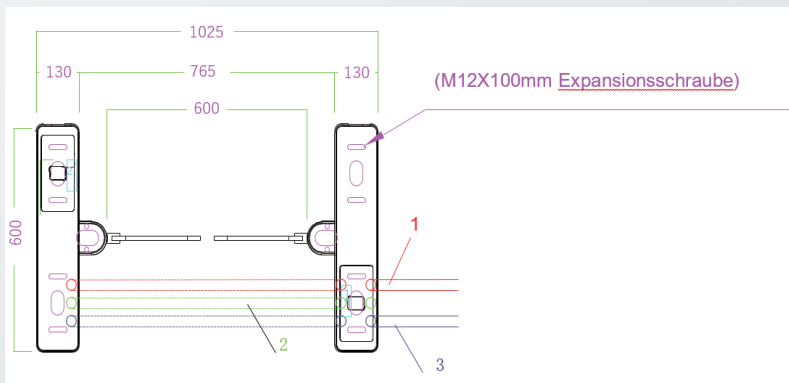

HIGHLIGHTS

- Efficient access control with high operational reliability
- Sensor-based system with six integrated detection sensors
- Extremely fast opening and closing time of 0.5 seconds
- Modern speed gate for design-oriented indoor areas
- RGB lighting for visual feedback and optical guidance
- Automatic opening of the swing doors in the event of a power failure

Accessories (Optional)

- iDTRONIC RFID Built-In Reader R840
- QR Code/ RFID Reader ID 1500/1200
- Remote Control (Wired / Wireless)
- Installation of third-party readers (e.g., MIFARE, LEGIC, EM, HID, etc.)

TECHNICAL DATA

SPECIFICATION

Dimensions	980 x 1025 x 600mm
Material	Aluminium alloy – anthracite anodized
Power Supply	24V / 500W
Operating Voltage	AC100V ~ 240V, 50/60HZ
Passage Rate	35–50 persons per minute
Emergency Mechanism	Automatic opening of the arms when powered off
Interface	Relay signal, RS485
Sensors	5 units per column
Operating location	Indoor use
Protection Class	IP4X
Operating Temperature	-20°C up to +70°C
Humidity	0 ~ 95%
Scope of delivery	• Security gate made of aluminium alloy • Acrylic swing doors / tempered glass • Anchor bolts (M12) + nuts • 1x power cable (Master / Slave) • 2x TCP/IP cables (Master / Slave)

DIMENSIONS

DIMENSIONS

Transparent acrylic / tempered glass	Standard • 2x 285x650 mm (600 mm passage width; 650 mm height) • 2x 430x650 mm (900 mm passage width; 650 mm height)
--------------------------------------	---

ORDER CODES

DESCRIPTION

ID Gate 5600	• R-TS-IDG-5600
--------------	---

PRODUCT IMAGES

