

## Swing Gate



# ID GATE 2400



## PRODUCT DESCRIPTION

The ID Swing Gate 2400 is a reliable and modern swing gate for access control in a wide range of applications. Whether in office buildings, airports, train stations, museums, or stadiums, the gate enables secure separation of access areas and ensures an orderly flow of people.

## DIMENSIONS

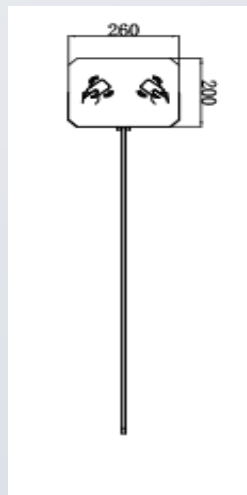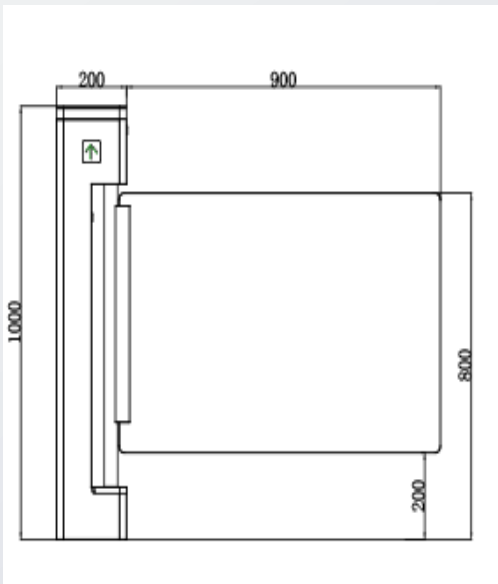

## HIGHLIGHTS

- **Reliable access control with fast response time**
- **LED display for clear access signals (red = locked, green = open)**
- **Single-sided or double-sided operation possible**
- **Suitable for indoor and outdoor use**
- **Automatic door opening in the event of power failure for increased safety**

## Accessories (Optional)

- **iDTRONIC RFID Built-In Reader R840**
- **QR Code/ RFID Reader ID 1500/1200**
- **Remote Control (Wired / Wireless)**
- **Installation of third-party readers (e.g., MIFARE, LEGIC, EM, HID, etc.)**

## TECHNICAL DATA

SPECIFICATION	
Dimensions	Swing Gate: 200 x 260 x 1000mm Glas: 600 x 900mm
Material	Stainless Steel 304 for indoor use Stainless Steel 312 for outdoor use
Power Supply	AC220V / 110V, 50/60Hz
Operating Voltage	24V DC
Capacity	40 people per minute
Emergency Mechanism	Automatic opening of the arms when powered off
Interface	Relaisignal, RS485
Operating Location	Indoor & Outdoor
Protection Class	IP44
Operating Temperature	-20°C up to +70°C
Humidity	≤90%
Scope of Delivery	<ul style="list-style-type: none"> <li>• Stainless steel swing gate</li> <li>• Acrylic glass</li> <li>• Anchor bolts (M12) + nuts</li> <li>• Wired remote control (for testing purposes only)</li> <li>• Cleaning set</li> </ul>

## ORDER CODES

DESCRIPTION	
ID Gate 2400 (Indoor)	• R-TS-SG2400-AG
ID Gate 2400 (Outdoor)	• R-TS-SG2400-AG-316

## PRODUCT IMAGES

