IDT1000 Series

UHF Hard Tag

IDT1129



Features:

Flexible RFID Tag for Irregular Surfaces – TPU Housing and Waterproof

Specifications	
RFID Protocol	EPC Class1 Gen2, ISO18000-6C
Frequency	865 - 868MHz
IC Type	Alien Higgs-9
Memory	96-bit (Up to 496-EPC Bits) 688-bit user memory 48-bit Unique TID
Material	TPU (Thermoplastic Polyurethane)
Mounting Method	Cablie tie
Applicable Surface	non Metal Surface
Operation Temperature	-40°C up to +100°C
Storage Temperature	-40°C up to +100°C
Read Range	Fixed Reader: 7.5m Handheld: 5.0m
Size	90.0 x 18.0 x 4.0mm
Weight	8g
IP Rating	IP68
Certifications	Reach Approved, RoHS Approved, CE Approved

Dimensions:

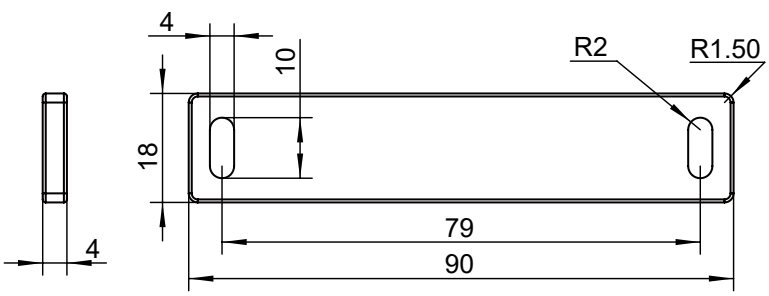

iDTRONIC GmbH
Ludwig-Reichling-Straße 4
67059 Ludwigshafen, Germany

Phone: +49 (0)621 66 900 94-0
Mail: Info@idtronic.de
Web:idtronic.de

Subject to change without notice
©2025 iDTRONIC GmbH