
UHF Hard Tag

IDT Inlay

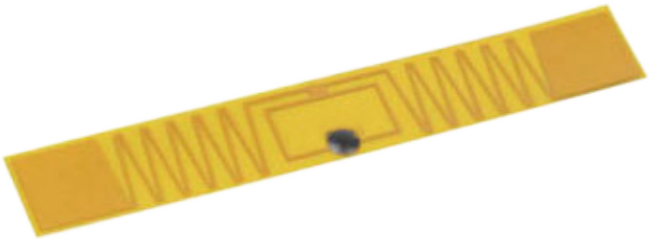

Features:

High-Temperature Resistant Flexible RFID Inlay – Soft & Thin Design, Long Read Range

Specifications	
RFID Protocol	EPC Class1 Gen2, ISO18000-6C
Frequency	865 - 868MHz
IC Type	Alien Higgs-3
Memory	EPC 96bits USER 512bit TID 64bits
Material	FPC (Flexible Printed Circuits)
Mounting Method	Adhesive
Applicable Surface	non Metal Surface
Operation Temperature	-40°C up to +100°C
Storage Temperature	-40°C up to +200°C
Read Range	Fixed Reader: 9.0m Handheld: 5.0m
Size	71.0 x 11.0 x 0.13mm
Weight	0,3g
IP Rating	IP68
Certifications	Reach Approved, RoHS Approved, CE Approved

iDTRONIC GmbH
Ludwig-Reichling-Straße 4
67059 Ludwigshafen, Germany

Phone: +49 (0)621 66 900 94-0
Mail: Info@idtronic.de
Web:idtronic.de

Subject to change without notice
©2025 iDTRONIC GmbH