

5 HP Reciprocating Pressure Lubricated




18 CFM @ 175 PSI

Features

- Heavy-duty pressure lubricated two-stage solid cast iron pump
- Disk and spring valves
- Centrifugal unloader
- Access to compressor valves without compressor head removal
- All UL electrical controls
- ASME/CRN certified air receiver
- Auto start/stop
- Bearings on both ends of the crank shaft
- Fully enclosed belt guard
- Heavy-duty air filter
- Industrial grade electric motor
- Magnetic starter mounted and wired
- Needle bearings, and inserts on rods
- Stainless steel flexible air lines
- Swedish steel valves
- TEFC drive motor (3 phase only)
- Torrington needle bearings
- 2-grove B width motor pulley
- 2-piece tank/top plate design

Elite Features

- All basic features
- Automatic tank drain
- Belt guard after cooler
- Low oil monitor
- Tank discharge ball valve
- Vibration pads
- Freight pre-paid in the 48 states & southern Canada

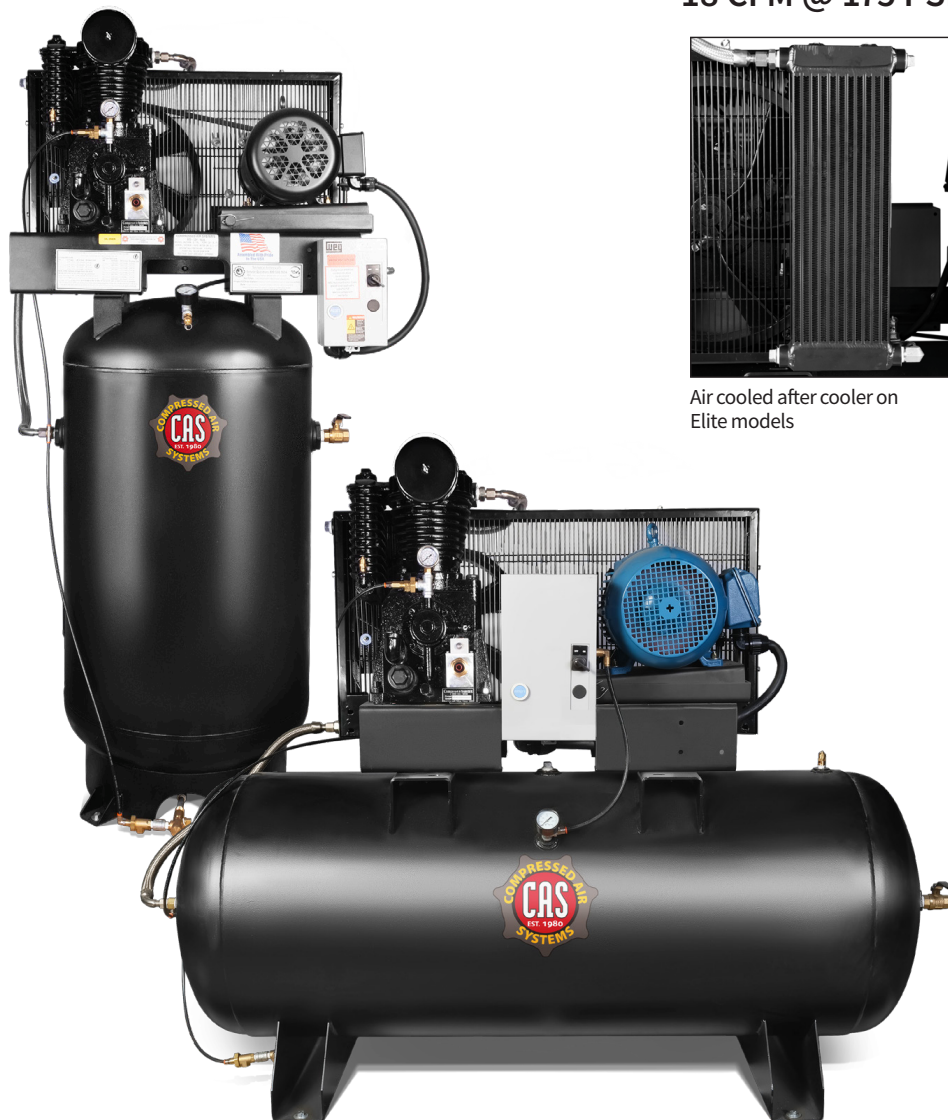

Air cooled after cooler on Elite models

Model	HP	CFM @ 175 PSI	Voltage	Tank	LxWxH	Weight
B51V64-PL	5	18	208-230/1	60 Gallon Vertical	35x24x77	700
B53V64-PL	5	18	208-230-480/3	60 Gallon Vertical	35x24x77	700
B51V84-PL	5	18	208-230/1	80 Gallon Vertical	36x24x72	750
B53V84-PL	5	18	208-230-480/3	80 Gallon Vertical	36x24x72	750
B51H84-PL	5	18	208-230/1	80 Gallon Horizontal	63x24x45	750
B53H84-PL	5	18	208-230-480/3	80 Gallon Horizontal	63x24x45	750

Add -E after model number to make Elite Model

No Start Up Kit Required

Lifetime Parts Warranty Available

Compressed Air Systems

Simplicity. It's What We Do.

compressed-air-systems.com | 1-800-531-9656 | Fax 972-352-6364

© Compressed Air Systems, LLC 10-2025



Scan to visit our website

