


Cleaning Scavenge Line NK-30-31

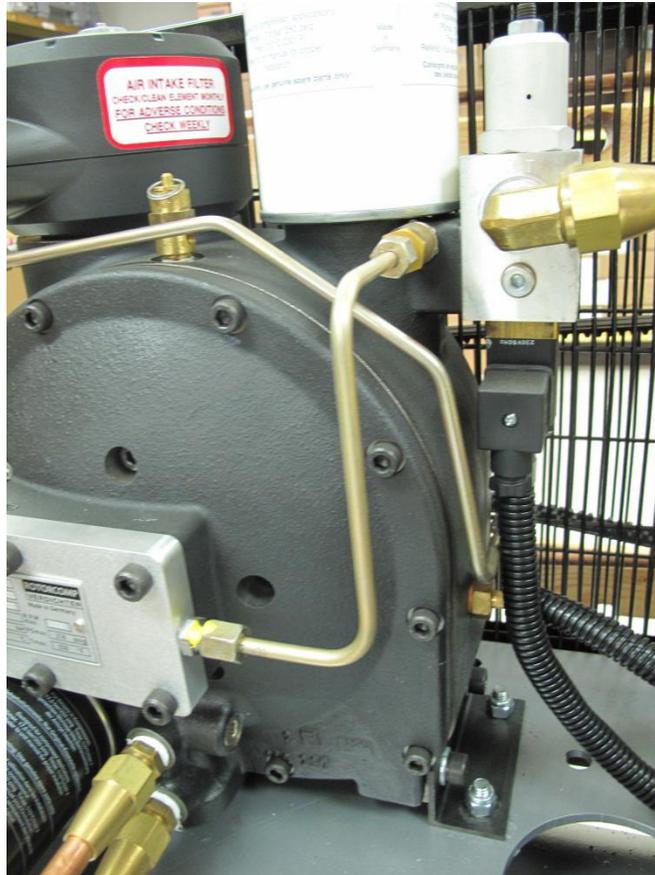

Notice: Always make sure the power is off to compressor and contact the manufacturer for advice.

Call 800-531-9656 to find a local trained air compressor service technician.

WARNING: To avoid personal injury, always shut OFF the main power supply and disconnects to the compressor, relieve all air pressure from the system, and check electrical system with electrical probe before starting any service or maintenance on the compressor.

Compressed Air Systems

Simplicity. It's What We Do.

compressed-air-systems.com | 1-800-531-9656 | Fax 972-352-6364

© Compressed Air Systems, LLC



Scan to visit our website






Step 1

Shut off the main power supply.

Step 2


Loosen nuts on both ends of the scavenge line.

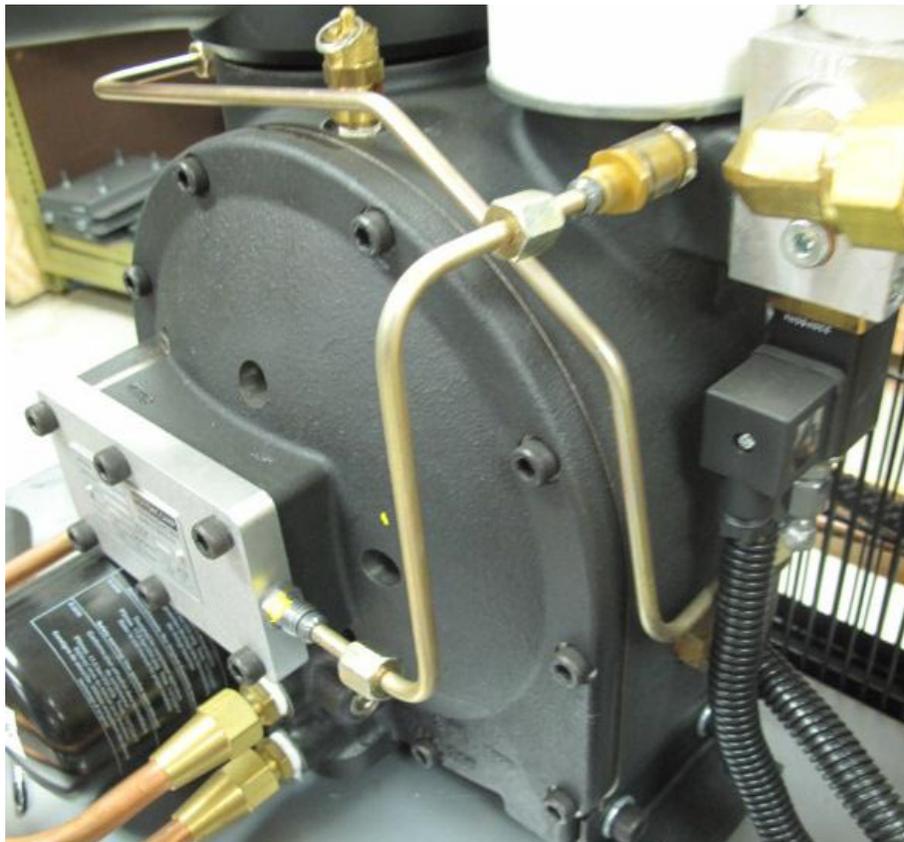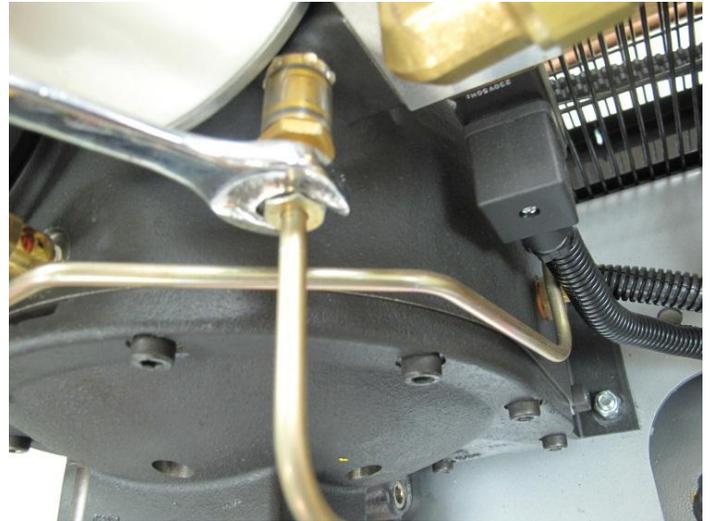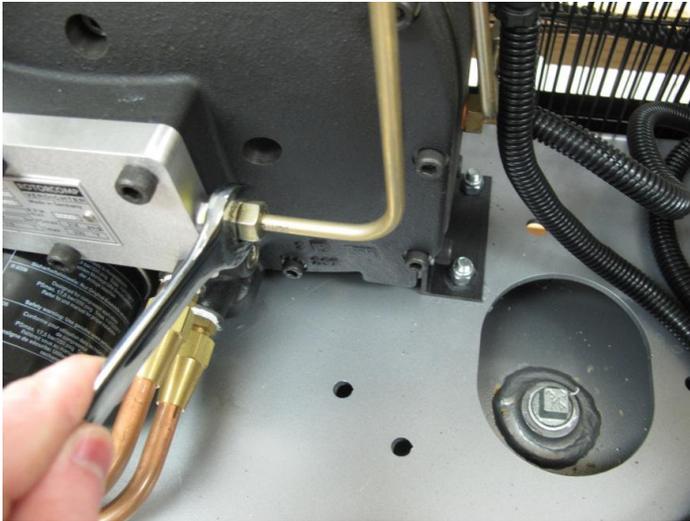

Nuts loosened and backed off fitting


Step 3

Scavenge line removed from fittings. Using an air blow gun or other device blow pressurized air through the line from both ends until clean.

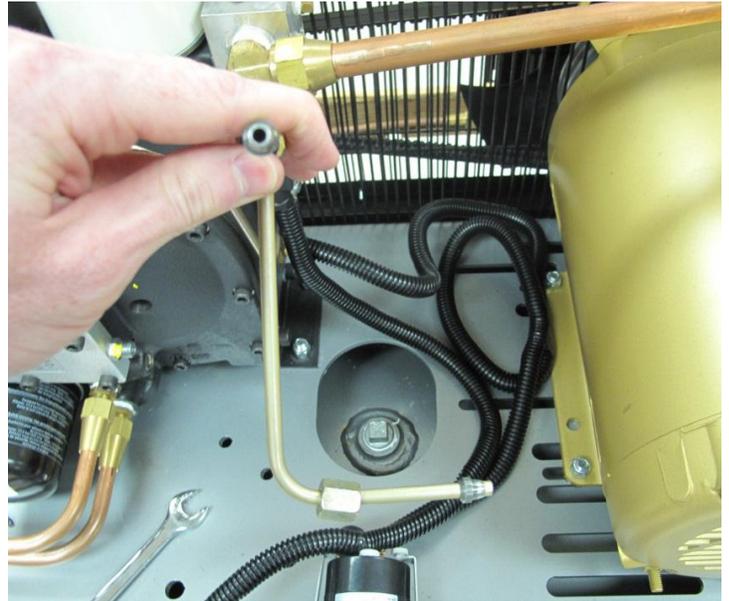

Step 4

Remove scavenge oil sight glass.

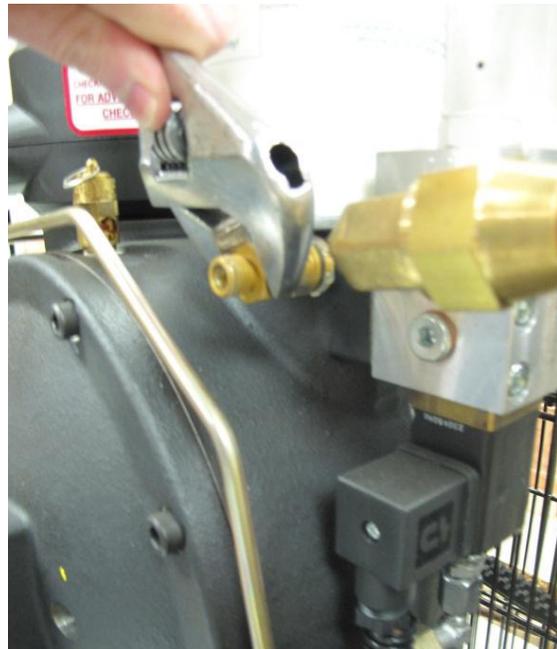

Step 5

Check scavenge sight glass for debris.




Step 6

Remove scavange line fitting from airend block.



Step 7

Check fitting for debris and check airend housing for debris.

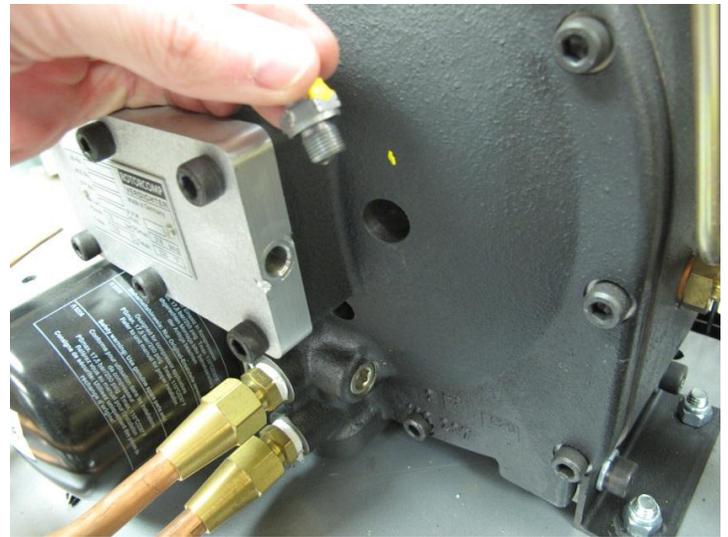

Step 8

Put scavange line and fittings back in place.





Compressed Air Systems, LLC

600 S 2nd Ave
Mansfield, TX, 76063

1-800-531-9656

Fax 972-352-6364

Simplicity. It's What We Do.