ALEA 40

The 40” Alea fire pit is handmade by Dekko in North America. Ships with your choice of NG or LP burner, one decorative aggregate option and chrome On/Off key.

Size: 40”W x 40”D x 16”H
CSA/US Approved Burner Assembly

	Manual Ignition	Electronic Ignition	Push Button
BTU/Hr	65,000	90,000	90,000
Weight	177 lbs	177 lbs	177 lbs
Fuel Options	NG/LP	NG/LP	NG/LP


Optional Accessories:

Propane Tank Cover 16”W x 16”D x 21”H
Glass Wind Guard 31”W x 31”D x 6”H
Vinyl Weather Cover
Powder Coated Aluminium Table Top 40”W x 40”D


Colour Options


NATURAL


LIMESTONE


CLAY


ASH



SANDSTONE



CHARCOAL

Decorative Aggregate Options



IVORY BEACH STONE



SLATE BEACH STONE


BLACK LAVA ROCK

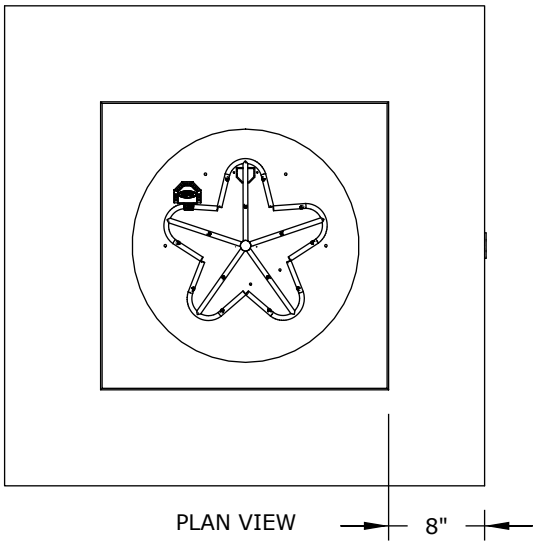


PLAN VIEW

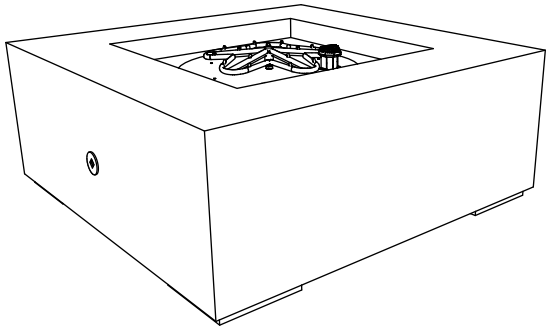
PERSPECTIVE VIEW

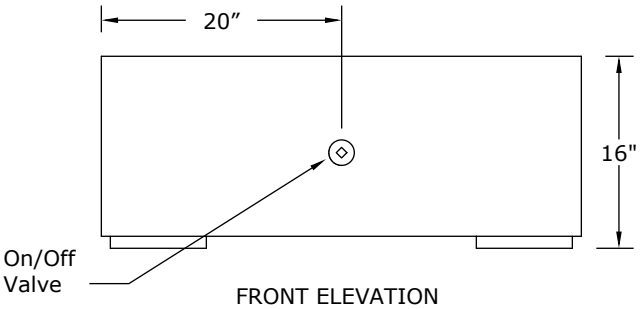


FRONT ELEVATION

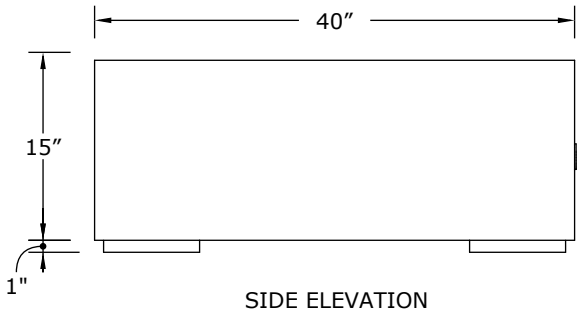


SIDE ELEVATION

Clearances

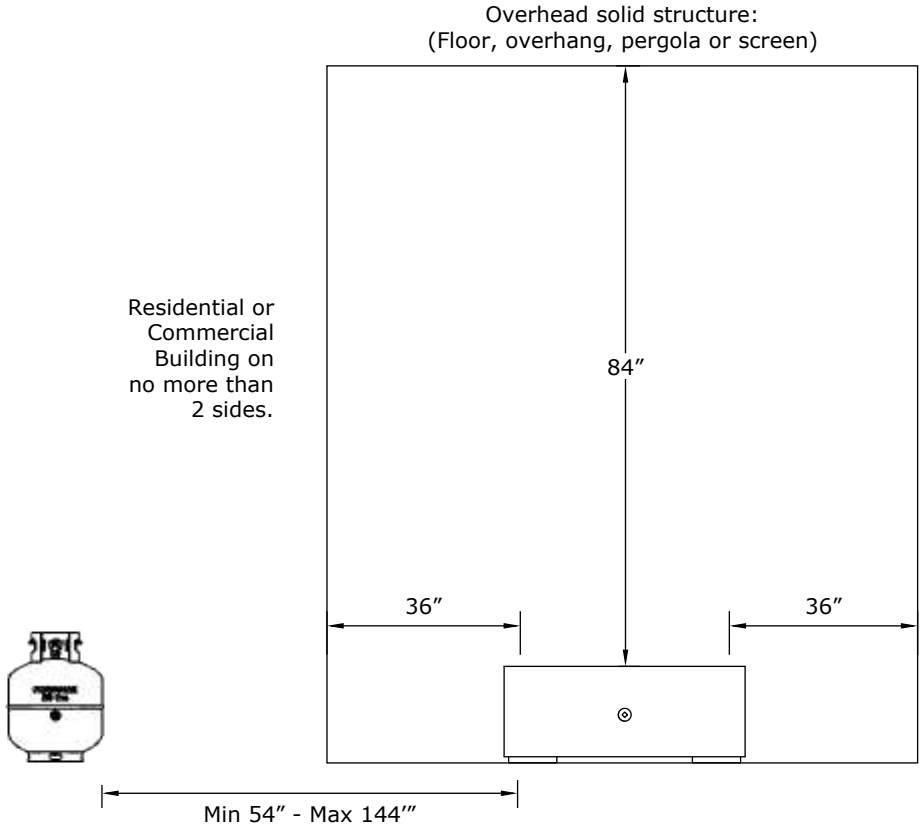


Note:
Deck Installation - a deck insulation kit is required when installing the fire pit on a wood or composite deck. Kit includes basalt material and instructions.

Burner Assembly

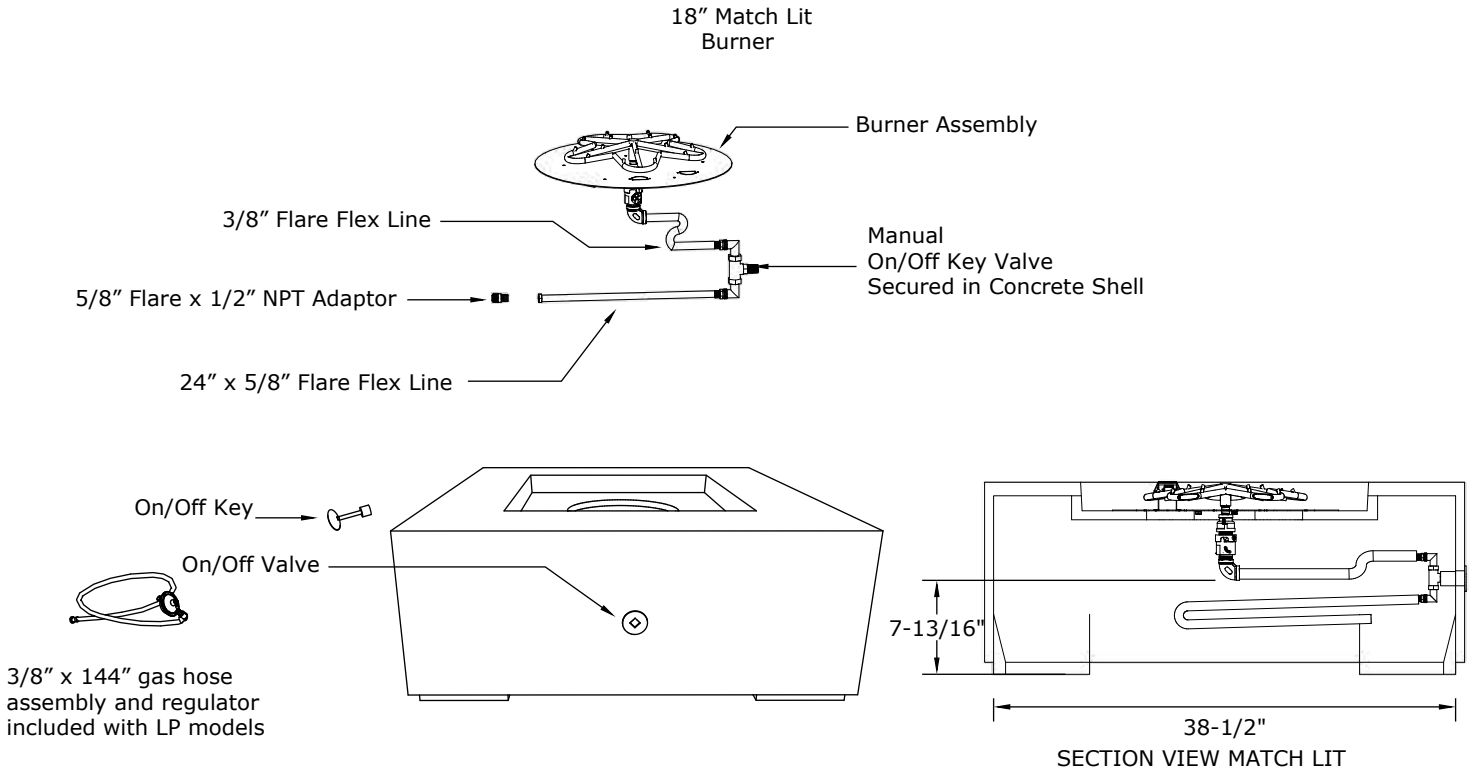

Clearances

Overhead solid structure:
(Floor, overhang, pergola or screen)

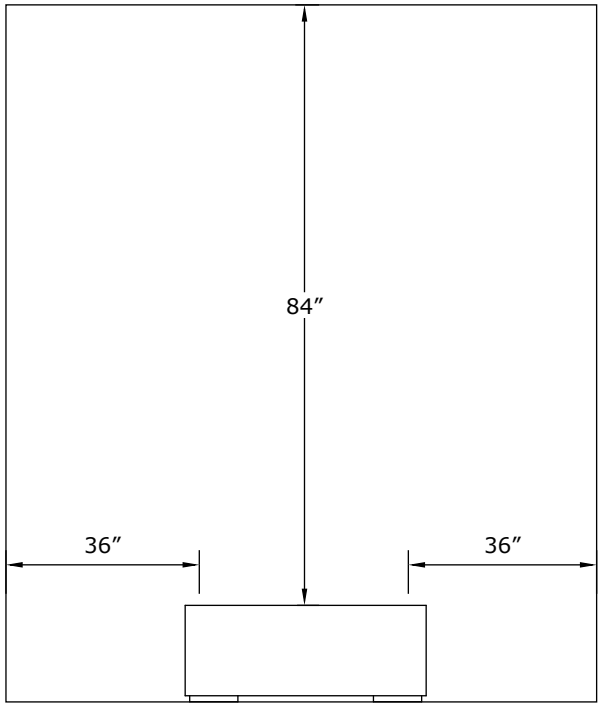

Residential or Commercial Building on no more than 2 sides.

Solid structure or combustible on no more than 2 sides.
- 12” minimum clearance for noncombustible materials.


Note:
Electronic ignition burners require a fixed piping gas supply. Not for use with portable LP tanks.


Note:
Deck Installation - if installing fire pit on a wood or composite deck, it is required to use the deck insulation kit. Kit includes basalt material and instructions.

Burner Assembly


Electrical:
120V Outdoor receptacle required. Must be installed and grounded in accordance with local codes.

18” Electronic Ignition Burner

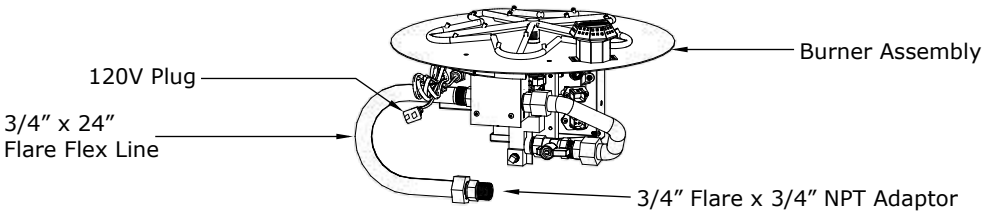

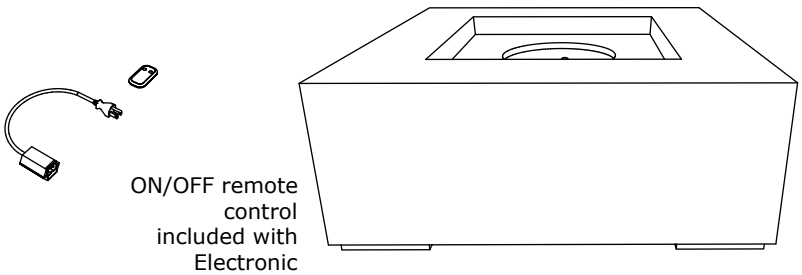


ON/OFF remote control included with Electronic Ignition models

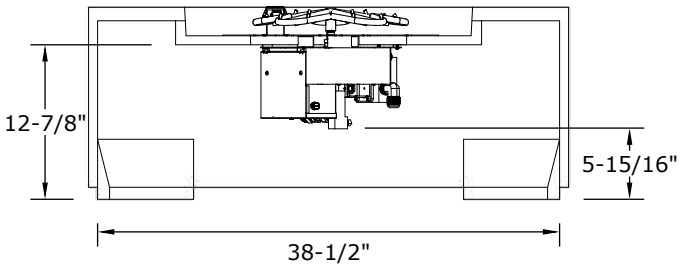

SECTION VIEW ELECTRONIC IGNITION


Clearances

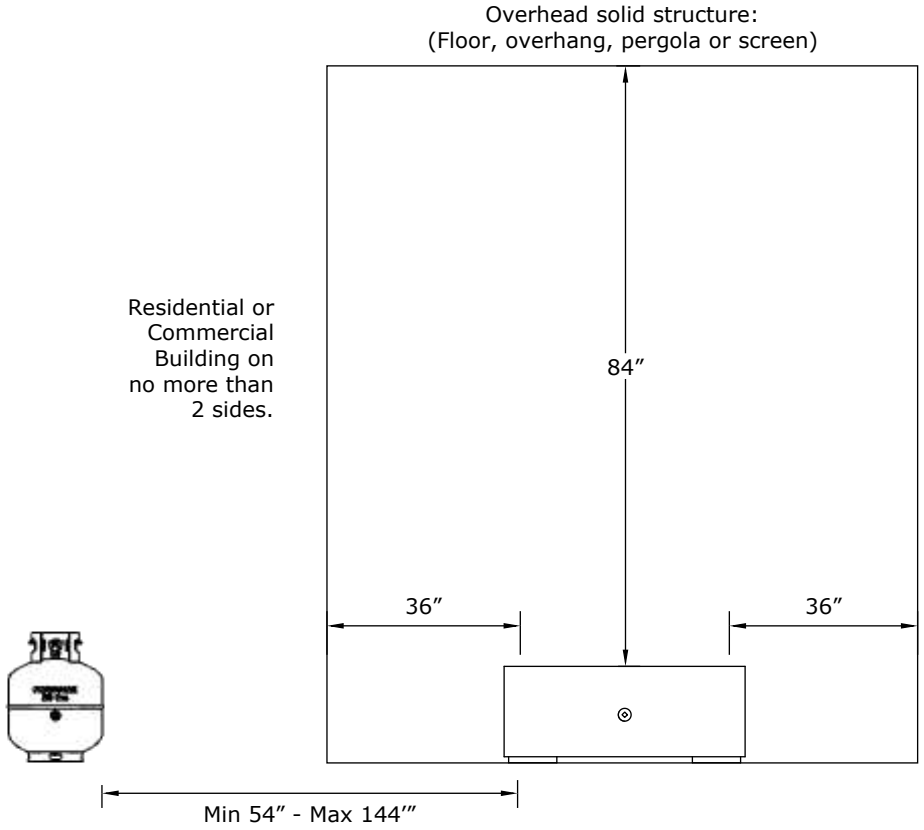

Solid structure or combustible on no more than 2 sides.
- 12” minimum clearance for noncombustible materials.


Note:
Deck Installation - a deck insulation kit is required when installing the fire pit on a wood or composite deck. Kit includes basalt material and instructions.

Burner Assembly

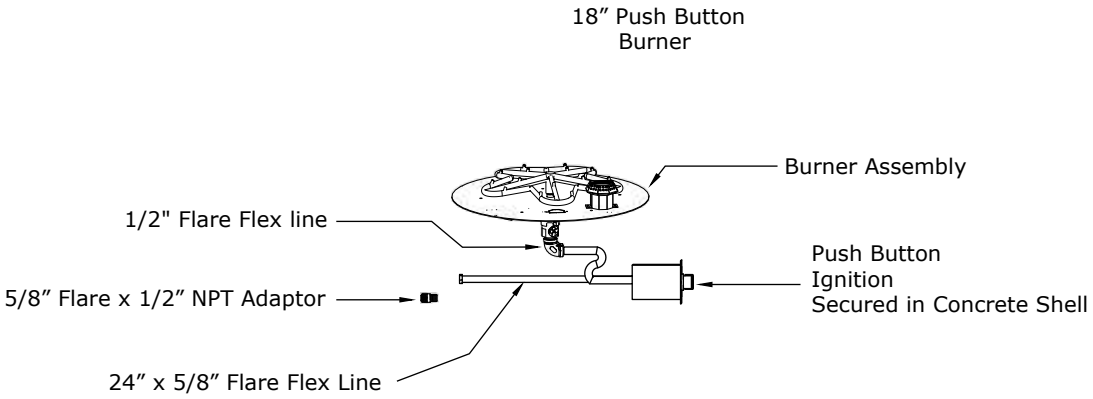



3/8” x 144” gas hose assembly and regulator included with LP models

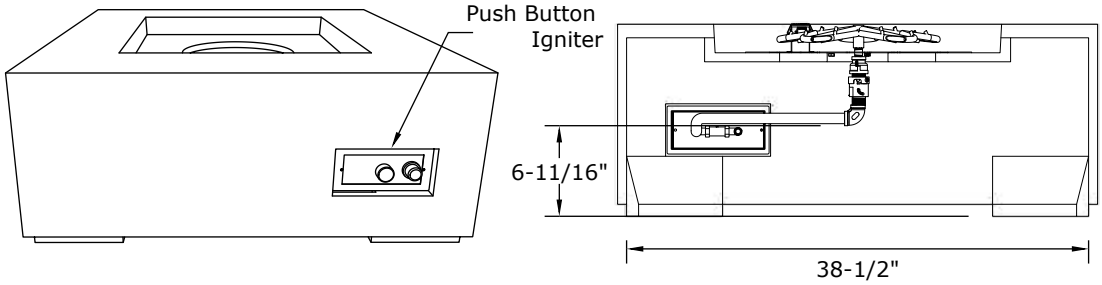

SECTION VIEW PUSH BUTTON