


TEMPEST FILTER

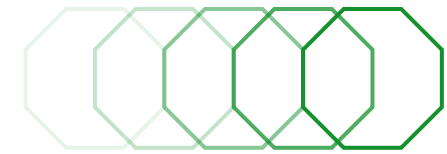

Pluggable 4 Socket 13A HEMP

Silicon CPV's 4 sockets, TEMPEST pluggable filter has been designed for use within stringent TEMPEST environments and applications, where protection compliant to SDIP-29 and equipment hardening to SDIP-27 is required.

The product uses ultra-reliable self-healing capacitors, in all units to deliver optimum performance across the full frequency range and under all loading conditions.

Product Description

TEMPEST EMI SP & N filter providing performance to SDIP-27 B/C
Insertion loss of 60dB from 100kHz to 1GHz

13A BS1363 3 pin plug input & 4 x BS1363 sockets

HEMP protection E1/ E2 pulses

Built-in current and voltage meter

Designed to IT equipment safety standard IEC 62368-1:2023

Fully 360° screened input cable to maintain red/black separation to filter

Low Smoke Zero Halogen (LSZH) rated cabling for use in sensitive areas

Self-healing metallised plastic film capacitors

High common & differential mode insertion loss

Improved low frequency performance


Powder coated aluminium enclosure

13A designed filters are tolerable for personnel protection RCCD

UKCA - CE compliant - Input voltage range (90-275VAC)


Simple mechanical and electrical installation

Filters comply with basic requirements of the EMC directive 2014/30/EU

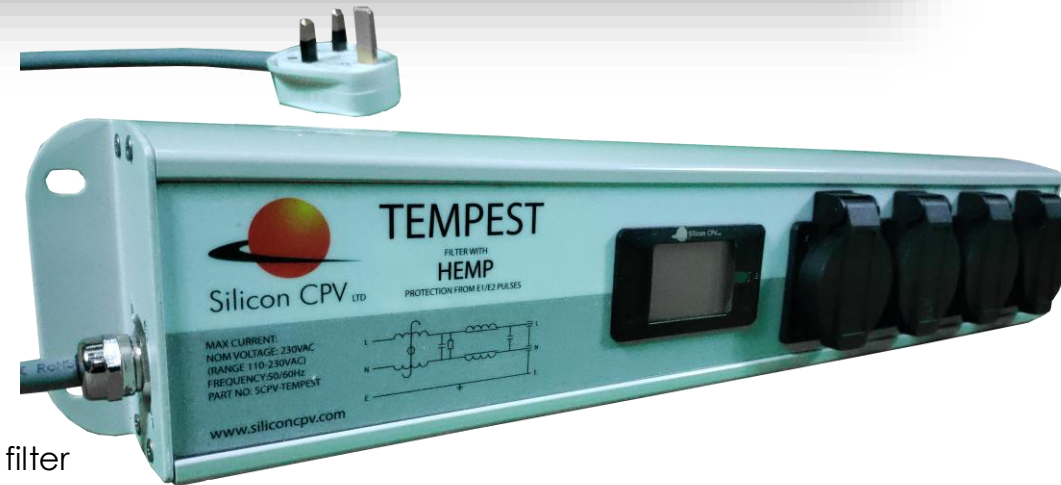

TEMPEST FILTER

Pluggable 4 Socket 13A HEMP

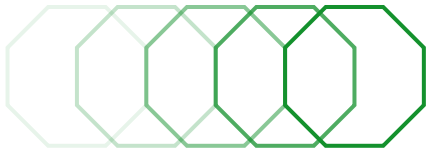

Part Number

SCPVTEMPEST13A4SH

CP&F Part No: **SCPVTEMPEST13A4SH**

Product Description

4 x BS1363 Sockets, Maximum 13A Single Phase

230V Pluggable Tempest Filter

Rating and Characteristics

Rated Voltage	230V AC 50/60Hz
Test Voltage (line- earth)	2250V DC
Test Voltage (line-Line)	1250V DC
Rated Current @50°C	13A
Earth Leakage Current	Less than 3.0mA
Max Temp Rise @Full Load	<35°C
Storage Temp Range	-30°C to +85°C
Operating Temp Range	-20°C to +50°C -35°C to +85°C for 20 minutes
Insertion Loss (50Ω Asymmetric)	60dB, 100KHz - 1GHz
Discharge Time	Less than 1s to below 34V
Enclosure	Extruded Aluminium
Finish	Powder coated

